



InterNational Committee for Information Technology Standards (INCITS)

Secretariat: Information Technology Industry Council (ITI)

700 K Street NW, Suite 610, Washington, DC 20001

www.INCITS.org



eb-2023-00116

Document Date: 02/15/2023

To: INCITS Members

Reply To: [Barbara Bennett](#)

Subject: Public Review and Comments Register for the Approval of:

INCITS 541-202x, Information technology - Automation/Drive Interface Commands - 4 (ADC-4)

Due Date: The public review is from March 3, 2023, to May 2, 2023.

Action: The InterNational Committee for Information Technology Standards ([INCITS](#)) announces that the subject-referenced document(s) is being circulated for a 60-day public review and comment period. Comments received during this period will be considered and answered. Commenters who have objections/suggestions to this document should so indicate and include their reasons.

All comments should be forwarded not later than the date noted above to the following address:

INCITS Secretariat/ITI
700 K Street NW - Suite 600
Washington DC 20001
Email: comments@standards.incits.org (preferred)

This public review also serves as a call for patents and any other pertinent issues (copyrights, trademarks). Correspondence regarding intellectual property rights may be emailed to the INCITS Secretariat at patents@itic.org.

Working Draft

Project T10/BSR INCITS 541

Revision 05
26 January 2023

Information technology - Automation/Drive Interface Commands - 4 (ADC - 4)

This is an internal working document of T10, a Technical Committee of Accredited Standards Committee INCITS (InterNational Committee for Information Technology Standards). As such this is not a completed standard and has not been approved. The contents may be modified by the T10 Technical Committee. The contents are actively being modified by T10. This document is made available for review and comment only.

Permission is granted to members of INCITS, its technical committees, and their associated task groups to reproduce this document for the purposes of INCITS standardization activities without further permission, provided this notice is included. All other rights are reserved. Any duplication of this document for commercial or for-profit use is strictly prohibited.

T10 Technical Editor:

Curtis Ballard
Hewlett Packard Enterprise
3404 E. Harmony Road
Fort Collins, CO 80528
USA

Telephone: 970-898-6669
Email: Curtis dot Ballard at HPE dot com

Reference number
ISO/IEC XXXXX-XXX : 20XX
INCITS 541

Points of Contact:

T10 Chair

William Martin
Samsung Semiconductor Inc. (SSI)
7213 Marblethorpe Drive
Roseville, CA 95747-5925
USA

Telephone: 916-765-6875
Email: bill dot martin at ssi dot samsung dot com

T10 Vice-Chair

Curtis Ballard
Hewlett Packard Enterprise
3404 E. Harmony Road
Fort Collins, CO 80528
USA

Telephone: 970-898-6669
Email: curtis dot ballard at HPE dot com

T10 Web Site <https://www.t10.org>

INCITS Secretariat

700 K Street NW
Suite 600
Washington, DC 20001
USA

Telephone: 1-202-737-8888
Web site: <http://www.incits.org>
Email: incits@itic.org

Information Technology Industry Council

Web site: <https://www.itic.org>

T10 Reflector To subscribe or unsubscribe: <https://www.t10.org/mailman/listinfo/t10>

Purchase INCITS Standards

<http://www.incits.org/standards-information/purchase-standards-or-download-dpans>

Revision Information

Changes in the SCSI standards family list, clause 1, are never marked with change bars. Changes in other clauses may be marked with change bars in minor (e.g., letter revisions such as SSC5r01c) revisions but are never marked with changes bars in major revisions.

1 Approved Documents Included

No T10 approved proposals are included in ADC-4 r0. ADC-4 r0 is identical to ADC-3 r05a except that editorial changes made by the ANSI Editor as part of the INCITS Public Review for ADC-3 appear in ADC-4 r0.

The following T10 approved proposals have been incorporated ADC-4 up to and including this revision:

Table 1 — Incorporated T10 Approved Documents (in document number order)

Doc	In Rev	Document Title	Document Author
13-205r5	1	Multi-Initiator Conflict Warning	Kevin Butt, IBM
14-249r2	1	SPC-5, SBC-4, SAT-4, ADC-4, SPL-4 - Obsolete TMC and ETC bits	Ralph Weber, WD
15-036r1	1	MICW Corrections	Kevin Butt, IBM
15-070r1	1	ADC-4 PCL in Separate Parameters	Kevin Butt, IBM
16-031r7	1a	SPC-5, ADC-4 Extended Copy Enhancements for Tape	Dennis Appleyard, Oracle
16-218r1	1a	ADC-4 System Check Recovery Procedure	Kevin Butt, IBM
16-221r7	1b	ADC-4 Ethernet Primary Port Configuration	Kevin Butt, IBM
17-052r1	1c	ADC4: Hold Bridging Manager Queue	Kevin Butt, IBM
17-089r0	2	SSC-5, ADC-4 Encrypt Only	Curtis Ballard, Hewlett Packard Enterprise
17-109r3	3	SSC-5, ADC-4 Load and Unload States	Curtis Ballard, Hewlett Packard Enterprise
18-071r1	3	ADC4: Optical Xcvr Info Reporting LP11	Kevin Butt, IBM
18-028r1	3	ADC4: Primary port Ethernet flow control config	Kevin Butt, IBM
22-075r3	4a	ADC-4 RFC Comment Resolution Tracking	Curtis Ballard, Hewlett Packard Enterprise

To the best of the technical editor's knowledge, the editor believes that all T10 approved proposals have been included in this revision.

2 Revision History

2.1 Revision 0 (20 November, 2014)

Revision 0 of ADC-4 is substantially equal to revision 5a of ADC-3. The only differences arise from changes made in ADC-3 by the ANSI Editor during the INCITS Public Review process.

2.2 Revision 1 (12 March, 2014)

The following T10 approved proposals were incorporated in ADC-4 revision 1:

- 13-205r5 Multi-Initiator Conflict Warning [Kevin Butt, IBM]
- 14-249r2 SPC-5, SBC-4, SAT-4, ADC-4, SPL-4 - Obsolete TMC and ETC bits [Ralph Weber, WD]
- 15-036r1 MICW Corrections [Kevin Butt, IBM]
- 15-070r1 ADC-4 PCL in Separate Parameters [Kevin Butt, IBM]

2.3 Revision 1a (2 November, 2016)

The following T10 approved proposals were incorporated in ADC-4 revision 1a:

- 16-031r7 SPC-5, ADC-4 Extended Copy Enhancements for Tape [Dennis Appleyard, Oracle]
- 16-218r1 ADC-4 System Check Recovery Procedure [Kevin Butt, IBM]

2.4 Revision 1b (6 January, 2017)

The following T10 approved proposals were incorporated in ADC-4 revision 1b:

- 16-221r7 ADC-4 Ethernet Primary Port Configuration [Kevin Butt, IBM]

2.5 Revision 1c (5 May, 2017)

The following T10 approved proposals were incorporated in ADC-4 revision 1c:

- 17-052r1 ADC4: Hold Bridging Manager Queue [Kevin Butt, IBM]

2.6 Revision 2 (31 May, 2017)

The following T10 approved proposals were incorporated in ADC-4 revision 2:

- 17-089r0 SSC-5, ADC-4 Encrypt Only [Curtis Ballard, Hewlett Packard Enterprise]

2.7 Revision 3 (18 December, 2018)

The following T10 approved proposals were incorporated in ADC-4 revision 3:

- 17-109r3 SSC-5, ADC-4 Load and Unload States [Curtis Ballard, Hewlett Packard Enterprise]
- 18-028r1 ADC4: Primary port Ethernet flow control config [Kevin Butt, IBM]
- 18-071r1 ADC4: Optical Xcvr Info Reporting LP11 [Kevin Butt, IBM]

2.8 Revision 4 (12 January, 2022)

Preparation for committee review updating references and other intro material.

2.9 Revision 4a (3 January, 2023)

Incorporation of RFC comment resolutions from T10 approved comment resolution tracking file:

22-075r3 ADC-4 RFC Comment Resolution Tracking [Curtis Ballard, Hewlett Packard Enterprise]

2.10 Revision 4b (24 January, 2024)

Correction of minor issues identified in review of RFC comment resolution incorporation.

Draft

**American National Standard
for Information Technology -**

Automation/Drive Interface Commands - 4 (ADC-4)

Secretariat
Information Technology Industry Council

Approved mm dd yy

American National Standards Institute, Inc.

Abstract

This standard specifies the device model and functional requirements for the SCSI automation/drive interface device type. This standards permits the SCSI automation/drive interface device type to communicate with application clients and defines the commands and data exchanged in such communications.

This standard does not contain material related to the service delivery subsystem that is used to transport the commands, command parameter data, command response data, and status specified in this standard.

Draft

**American
National
Standard**

Approval of an American National Standard requires review by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer. Consensus is established when, in the judgement of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered and that a concerted effort be made towards their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

CAUTION: The developers of this standard have requested that holders of patents that may be required for the implementation of the standard disclose such patents to the publisher. However, neither the developers nor the publisher have undertaken a patent search in order to identify which, if any, patents may apply to this standard. As of the date of publication of this standard, following calls for the identification of patents that may be required for the implementation of the standard, notice of one or more such claims has been received. By publication of this standard, no position is taken with respect to the validity of this claim or of any rights in connection therewith. The known patent holder(s) has (have), however, filed a statement of willingness to grant a license under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license. Details may be obtained from the publisher. No further patent search is conducted by the developer or publisher in respect to any standard it processes. No representation is made or implied that this is the only license that may be required to avoid infringement in the use of this standard.

Published by
American National Standards Institute, Inc.
25 West 43rd Street
New York, NY 10036

Copyright © 2023 by Information Technology Industry Council (ITI). All rights reserved.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without prior written permission of ITI, 700 K Street NW, Suite 600, Washington, DC 20001.

Printed in the United States of America

Draft

Contents

Page

1 Approved Documents Included iii

2 Revision History iii

 2.1 Revision 0 (20 November, 2014) iii

 2.2 Revision 1 (12 March, 2014) iv

 2.3 Revision 1a (2 November, 2016) iv

 2.4 Revision 1b (6 January, 2017) iv

 2.5 Revision 1c (5 May, 2017) iv

 2.6 Revision 2 (31 May, 2017) iv

 2.7 Revision 3 (18 December, 2018) iv

 2.8 Revision 4 (12 January, 2022) v

 2.9 Revision 4a (3 January, 2023) v

 2.10 Revision 4b (24 January, 2024) v

FOREWORD xv

Introduction xviii

1 Scope 1

2 Normative References 1

3 Definitions, symbols, abbreviations, and conventions 4

 3.1 Definitions 4

 3.2 Abbreviations 8

 3.3 Keywords 8

 3.4 Editorial conventions 10

 3.5 Numeric and character conventions 11

 3.6 Bit and byte ordering 12

4 General 14

 4.1 Automation/drive interface model overview 14

 4.2 Device server interaction 15

 4.3 ADI bridging 17

 4.3.1 ADI bridging introduction 17

 4.3.2 Local SMC device server operation 18

 4.3.3 Remote SMC device server operation 18

 4.3.4 Bridging manager operation 19

 4.3.4.1 Bridging manager operation overview 19

 4.3.4.2 Processing of CHECK CONDITION status 19

 4.3.4.3 Holding SCSI commands 20

 4.3.5 Caching SMC data and status 20

 4.4 Load status and unload status 21

 4.4.2 Load statuses 21

 4.4.3 Unload statuses 23

 4.5 Sense data masking 23

 4.6 TapeAlert application client interface 24

 4.7 Medium Auxiliary Memory attributes 25

 4.8 DT device primary ports 25

 4.8.1 DT device primary port index 25

 4.8.2 Enabling and disabling DT device primary ports 25

- 4.9 Sequential mode operation 26
- 4.10 ADC tape external data encryption control 26
 - 4.10.1 ADC tape external data encryption control introduction 26
 - 4.10.2 disabling a supported logical block encryption algorithm 29
 - 4.10.3 Reporting DT device logical block encryption algorithm support 29
 - 4.10.4 ADC tape external data encryption control of logical block encryption parameters 30
 - 4.10.4.1 ADC tape external data encryption control of logical block encryption parameters introduction 30
 - 4.10.4.2 Reporting logical block encryption parameters requests 30
 - 4.10.4.3 Providing a set of logical block encryption parameters 30
 - 4.10.4.4 Logical block encryption parameters required values 31
 - 4.10.4.5 Key management errors 31
 - 4.11 ADC control of tape stream mirroring 33
 - 4.11.1 ADC configuration of tape stream mirroring 33
 - 4.12 Potential conflict list 33
- 5 Commands for automation/drive interface devices 35
 - 5.1 Summary of commands for automation/drive interface devices 35
 - 5.2 NOTIFY DATA TRANSFER DEVICE command 38
 - 5.3 SET AUTOMATION DEVICE ATTRIBUTES command 40
 - 5.3.1 SET AUTOMATION DEVICE ATTRIBUTES command introduction 40
 - 5.3.2 Automation device attributes parameter list format 40
 - 5.3.3 Automation device attribute format 42
 - 5.4 SET MEDIUM ATTRIBUTE command 43
 - 5.4.1 SET MEDIUM ATTRIBUTE command introduction 43
 - 5.4.2 SET MEDIUM ATTRIBUTE parameter list format 44
 - 5.4.3 SET MEDIUM ATTRIBUTE attribute format 45
 - 5.5 SET TAPE STREAM MIRRORING command 46
 - 5.5.1 Tape stream mirroring control parameters 47
 - 5.6 REPORT AUTOMATION DEVICE ATTRIBUTES command 47
- 6 Parameters for automation/drive interface devices 49
 - 6.1 Ethernet parameters 49
 - 6.1.1 Ethernet parameters overview 49
 - 6.1.2 IPv4 address 49
 - 6.1.3 IPv6 address 50
 - 6.1.4 TCP port 50
 - 6.1.5 UDP port 51
 - 6.2 Log parameters 51
 - 6.2.1 Log parameters overview 51
 - 6.2.2 DT Device Status log page 53
 - 6.2.2.1 DT Device Status log page overview 53
 - 6.2.2.2 Very high frequency data log parameter 55
 - 6.2.2.3 Very high frequency polling delay log parameter 59
 - 6.2.2.4 DT device ADC data encryption control status log parameter 60
 - 6.2.2.5 Key management error data log parameter 63
 - 6.2.2.6 Extended very high frequency data log parameter 65
 - 6.2.2.7 DT device primary port status log parameter(s) 66
 - 6.2.2.8 Potential conflict list entries count log parameter 70
 - 6.2.2.9 Potential conflict list log parameter(s) 71
 - 6.2.2.10 DT device primary port physical interface information 72
 - 6.2.2.11 DT device primary port IP addresses log parameter(s) 73
 - 6.2.3 TapeAlert Response log page 76
 - 6.2.4 Requested Recovery log page 77
 - 6.2.4.1 Requested Recovery log page overview 77

- 6.2.4.2 Recovery procedures log parameter 78
- 6.2.5 Service Buffers Information log page 80
- 6.3 Mode parameters 83
- 6.3.1 Mode parameters overview 83
- 6.3.2 ADC Device Server Configuration mode page 85
- 6.3.2.1 DT Device Primary Port subpage 85
- 6.3.2.2 IP address subpage 97
- 6.3.2.3 iSCSI alias subpage 100
- 6.3.2.4 iSCSI authentication configuration subpage 100
- 6.3.2.5 iSCSI CHAP authentication configuration subpage 101
- 6.3.2.6 Logical Unit subpage 105
- 6.3.2.7 Target Device Serial Number subpage 112
- 6.3.2.8 Target Device subpage 113
- 6.4 Security protocol parameters 115
- 6.4.1 Security protocol parameters overview 115
- 6.4.2 SECURITY PROTOCOL IN command specifying Tape Data Encryption security protocol 115
- 6.4.3 SECURITY PROTOCOL IN command specifying Data Encryption Configuration security protocol 116
- 6.4.3.1 SECURITY PROTOCOL IN command specifying Data Encryption Configuration security protocol overview
116
- 6.4.3.2 Data Encryption Configuration In Support page 117
- 6.4.3.3 Data Encryption Configuration Out Support page 118
- 6.4.3.4 Report Data Encryption Policy page 119
- 6.4.4 SECURITY PROTOCOL OUT command specifying Tape Data Encryption security protocol 120
- 6.4.4.1 SECURITY PROTOCOL OUT command specifying Tape Data Encryption security protocol overview
120
- 6.4.4.2 Data Encryption Parameters Complete page 121
- 6.4.5 SECURITY PROTOCOL OUT command specifying Data Encryption Configuration security protocol ... 123
- 6.4.5.1 SECURITY PROTOCOL OUT command specifying Data Encryption Configuration security protocol over-
view 123
- 6.4.5.2 Configure Data Encryption Algorithm Support page 124
- 6.4.5.3 Configure Encryption Policy page 126
- 6.5 Vital product data parameters 129
- 6.5.1 Vital product data parameters overview and page codes 129
- 6.5.2 Device Identification VPD page 129
- 6.5.3 Manufacturer-assigned Serial Number VPD page 130

Tables

	Page
Table 1 - Numbering conventions	12
Table 2 - Device entity attributes reported in VHF data	21
Table 3 - Load statuses and load conditions	21
Table 4 - Load statuses example.....	22
Table 5 - Unload statuses and unload conditions	23
Table 6 - Logical block encryption parameters control policy	27
Table 7 - Command set for automation/drive interface.....	35
Table 8 - NOTIFY DATA TRANSFER DEVICE command	38
Table 9 - SET AUTOMATION DEVICE ATTRIBUTES command	40
Table 10 - Automation device attributes parameter list format	41
Table 11 - Automation device attribute format.....	42
Table 12 - ATTRIBUTE IDENTIFIER field	42
Table 13 - SET MEDIUM ATTRIBUTE command	43
Table 14 - SET MEDIUM ATTRIBUTE parameter list format	44
Table 15 - SET MEDIUM ATTRIBUTE attribute format	45
Table 16 - ATTRIBUTE IDENTIFIER field.....	45
Table 17 - FORMAT field	45
Table 18 - SET TAPE STREAM MIRRORING command	46
Table 19 - Tape stream mirroring control parameters	47
Table 20 - REPORT AUTOMATION DEVICE ATTRIBUTES command	48
Table 21 - IPv4 address format	49
Table 22 - IPv6 address format	50
Table 23 - TCP port protocol specific data	50
Table 24 - UDP port protocol specific data	51
Table 25 - Log page codes	51
Table 26 - DT Device Status log page.....	53
Table 27 - DT Device Status log page parameter codes	54
Table 28 - Very high frequency data log parameter format	55
Table 29 - VHF data descriptor.....	55
Table 30 - DT DEVICE ACTIVITY field.....	57
Table 31 - Very high frequency polling delay log parameter format	59
Table 32 - DT device ADC data encryption control status log parameter format	60
Table 33 - SERVICE REQUEST INDICATORS field	60
Table 34 - Key management error data log parameter.....	63
Table 35 - ERROR TYPE field	64
Table 36 - Extended very high frequency data log parameter format.....	65
Table 37 - DT device primary port status log parameter(s) format	66
Table 38 - Port status data format by protocol identifier	66
Table 39 - Fibre Channel port status data format	67
Table 40 - SCSI parallel interface port status data format	68
Table 42 - PAUSE METHOD field	69
Table 41 - iSCSI Ethernet port status data format.....	69
Table 43 - Serial Attached SCSI port status data format.....	70
Table 44 - Potential conflict list entries count log parameter format	70
Table 45 - Potential conflict list log parameter format.....	71
Table 46 - DT device primary port physical interface information format	72
Table 47 - physical information format Codes	73
Table 48 - DT device primary port IP addresses log parameter(s) format.....	73
Table 49 - DEFAULT ROUTING field	74
Table 50 - ADDRESS TYPE field.....	74
Table 51 - IP address protocol specific data.....	75
Table 52 - TapeAlert Response log page	76

Table 53 - Requested Recovery log page	77
Table 54 - Requested Recovery log page parameter codes	77
Table 55 - Requested recovery log parameter format	78
Table 56 - Recovery procedures	79
Table 57 - Service Buffers Information log page	80
Table 58 - Service buffer information log parameter format	81
Table 59 - Service buffer information parameter codes.....	81
Table 60 - Summary of mode page codes.....	83
Table 61 - DT Device Primary Port subpage	85
Table 62 - DT device primary port descriptor format	86
Table 63 - Primary port descriptor by protocol identifier value	86
Table 64 - Fibre Channel descriptor parameter format.....	87
Table 65 - TOPLOCK bit, N_PORT bit, and TOPORD bit interaction.....	87
Table 66 - Effect of RHA and LIV bits	88
Table 67 - MPN field.....	88
Table 68 - FIBRE CHANNEL SPEED VALUES.....	89
Table 69 - FIBRE CHANNEL EXTENDED SPEED VALUES	90
Table 70 - Parallel SCSI descriptor parameter format.....	90
Table 71 - BMQ field	91
Table 72 - iSCSI Ethernet port descriptor parameter format	91
Table 73 - DCBX CONTROL FIELD.....	92
Table 74 - LLDP CONTROL field.....	92
Table 75 - MPI field.....	93
Table 76 - DSCP CONTROL field.....	93
Table 77 - PFC PRIORITY CONTROL field.....	94
Table 78 - Serial Attached SCSI descriptor parameter format	94
Table 79 - MPI field.....	95
Table 80 - PROGRAMMED MINIMUM PHYSICAL LINK RATE field and PROGRAMMED MAXIMUM PHYSICAL LINK RATE field	96
Table 81 - HARDWARE MINIMUM PHYSICAL LINK RATE field and HARDWARE MAXIMUM PHYSICAL LINK RATE field	96
Table 82 - IP address subpage.....	97
Table 83 - IP address port descriptor format	98
Table 84 - AAM field.....	99
Table 85 - iSCSI alias subpage	100
Table 86 - iSCSI authentication subpage	100
Table 87 - AuthMethod descriptor	101
Table 88 - iSCSI CHAP authentication configuration subpage.....	101
Table 89 - Discovery descriptor format.....	102
Table 90 - Normal descriptor format.....	103
Table 91 - Username—password descriptor format	104
Table 92 - Logical Unit subpage	105
Table 93 - RMC logical unit descriptor format	106
Table 94 - MLUD field.....	107
Table 95 - AUTOLOAD MODE field.....	108
Table 96 - SMC logical unit descriptor format.....	109
Table 97 - ADC logical unit descriptor format	111
Table 98 - Target Device Serial Number subpage	112
Table 99 - MPSN field.....	112
Table 100 - Target Device subpage.....	113
Table 101 - MTDN field	114
Table 102 - SECURITY PROTOCOL SPECIFIC field values for security protocol 20h.....	115
Table 103 - SECURITY PROTOCOL SPECIFIC field values for security protocol 21h.....	116
Table 104 - Data Encryption Configuration In Support page	117
Table 105 - Data Encryption Configuration Out Support page	118
Table 106 - Report Data Encryption Policy page.....	119

Table 107 - SECURITY PROTOCOL SPECIFIC field values for security protocol 20h..... 120

Table 108 - Data Encryption Parameters Complete page 121

Table 109 - Automation complete results codes 122

Table 110 - SECURITY PROTOCOL SPECIFIC field values for security protocol 21h..... 124

Table 111 - Configure Data Encryption Algorithm Support page 125

Table 112 - Encryption Algorithm Support descriptor 125

Table 113 - Configure Encryption Policy page..... 126

Table 114 - DECRYPTION PARAMETERS REQUEST POLICY field values 128

Table 115 - ENCRYPTION PARAMETERS REQUEST POLICY field values 128

Table 116 - ADC device VPD page codes 129

Table 117 - Manufacturer-assigned Serial Number VPD page..... 130

Figure 1 — Figures

	Page
Figure 1 - SCSI document structure	xix
Figure 2 - Example of an automation device and DT device relationship	15
Figure 3 - Device server model.....	16

FOREWORD

This foreword is not part of American National Standard INCITS 541.

This standard specifies the external behavior of a device server that defines itself as an automation/drive interface device in the PERIPHERAL DEVICE TYPE field of the standard INQUIRY data. This device type is known as an automation/drive interface device.

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent to the INCITS Secretariat, InterNational Committee for Information Technology Standards, Information Technology Institute, 700 K Street, NW, Suite 600, Washington, DC 20001.

This standard was processed and approved for submittal to ANSI by the InterNational Committee for Information Technology Standards (INCITS). Committee approval of the standard does not necessarily imply that all committee members voted for approval. At the time it approved this standard, INCITS had the following members:

<<Insert INCITS member list>>

Technical Committee T10 on SCSI Storage Interfaces, which developed and reviewed this standard, had the following members:

William Martin, Chair
 Curtis Ballard, Vice-Chair
 Curtis Stevens, Secretary

<i>Organization Represented</i>	<i>Name of Representative</i>
Amphenol Corporation	Paul Coddington
	Brad Brubaker (Alt)
	Zhineng Fan (Alt)
	Adrian Green (Alt)
	Donald Harper (Alt)
	Jesse Jaramillo (Alt)
	Sam Kocsis (Alt)
	Martin Li (Alt)
	Chris Lyon (Alt)
	Alex Persaud (Alt)
	Michael Scholeno (Alt)
	Hu Silver (Alt)
	Michael Wingard (Alt)
	Matt Wright (Alt)
Broadcom Inc.	Brad Besmer
	Srikiran Dravida (Alt)
	John Gardner (Alt)
	Jeffrey Gauvin (Alt)
	Rick Kutcipal (Alt)
	Bernhard Laschinsky (Alt)
	David Peterson (Alt)
	James Smart (Alt)
	Jason Stuhlsatz (Alt)
	Steve Wilson (Alt)

Dell Inc.	Kevin Marks David Black (Alt) George Ericson (Alt) James Giannoules (Alt) Christopher Goonan (Alt) Bill Lynn (Alt) Marlon Ramroopsingh (Alt)
Foxconn Electronics.....	Fred Fons Gary Hsieh (Alt) Glenn Moore (Alt) Miller Zhao (Alt)
Futurewei Technologies Inc.....	Victor Cao Timothy Jeffries (Alt) Nelson Liao (Alt)
Hewlett Packard Enterprise	Curtis Ballard Chris Cheng (Alt) Rob Elliott (Alt) Jeff Wolford (Alt)
IBM Corporation	Kevin Butt Mike Osborne (Alt)
Intel Corporation	Michael Hoard Kim Malone (Alt) Minesh Patel (Alt) Eric Pickering (Alt) Tezwen Wang (Alt) Juntao Yuan (Alt)
Kioxia	John Geldman Cameron Brett (Alt) Mark Carlson (Alt) Don Harwood (Alt) Koichi Nagai (Alt) Paul Suhler (Alt) Tatsuya Tanaka (Alt)
Luxshare-ICT	Scott Shuey Josue Castillo (Alt) Jinhua Chen (Alt) Pat Young (Alt)
Marvell Semiconductor Inc.....	Craig Carlson Ke Du (Alt) James Walch (Alt) Wei Zhou (Alt)
Microchip.....	Tim Symons Sanjay Goyal (Alt) Adnan Jiwani (Alt) Keith Shaw (Alt) Ariel Sibley (Alt) Gregory Tabor (Alt) Jeremiah Tussey (Alt)
Molex Inc.....	Alex Haser Darian Schulz (Alt) Scott Sommers (Alt)
NetApp Inc	Frederick Knight Chris Fore (Alt) Jaimon George (Alt)

Quantum Corporation	Darryl Torske Carsten Prigge (Alt)
Samsung Semiconductor Inc (SSI).....	William Martin Michael Allison (Alt) Judy Brock (Alt) HeeChang Cho (Alt) Mikyeong Kang (Alt) Sung Lee (Alt) Bhavith M.P. (Alt)
Seagate Technology.....	Gerald Houlder Alvin Cox (Alt) Ian Davies (Alt) John Fleming (Alt) Jim Hatfield (Alt) Anil Keste (Alt) Tony Kilwein (Alt) Curtis Stevens (Alt) Judy Westby (Alt)
TE Connectivity	Matt Schumacher Tom Grzysiewicz (Alt) Kyle Klinger (Alt) Jeffery Mason (Alt) Joel Meyers (Alt) Yasuo Sasaki (Alt) Nathan Tracy (Alt)
Toshiba America Electronic Components Inc.....	Patrick Hery Don Harwood (Alt) Johanna Hernandez (Alt)
Viavi Solutions Inc.....	Jason Rusch George Bullis (Alt) Dominic Coupal (Alt) Paul Gentieu (Alt) Jason Mann (Alt) Francisco Roy (Alt) Yamini Shastry (Alt)
Western Digital Corporation	Ralph Weber William Boyle (Alt) Jorge Campello (Alt) Marvin DeForest (Alt) Kirill Dimitrov (Alt) Michael Koffman (Alt) Dave Landsman (Alt) Damien Le Moal (Alt) Larry McMillan (Alt) Chet Mercado (Alt) Nadesan Narenthiran (Alt) Christopher Reed (Alt) Yoni Shternhell (Alt) Carter Xu (Alt) Eric Richard Zornberg (Alt)

Emeritus

William Ham

John Lohmeyer

Introduction

This standard is divided into the following clauses:

Clause 1 is the scope.

Clause 2 enumerates the normative references that apply to this standard.

Clause 3 describes the definitions, symbols, abbreviations, and conventions used in this standard.

Clause 4 describes an overview and model of the automation/drive interface device.

Clause 5 describes the command set for automation/drive interface devices.

Clause 6 describes the parameters for automation/drive interface devices.

SCSI standards family

Figure 1 shows the relationship of this standard to the other standards and related projects in the SCSI family standards as of the publication of this standard.

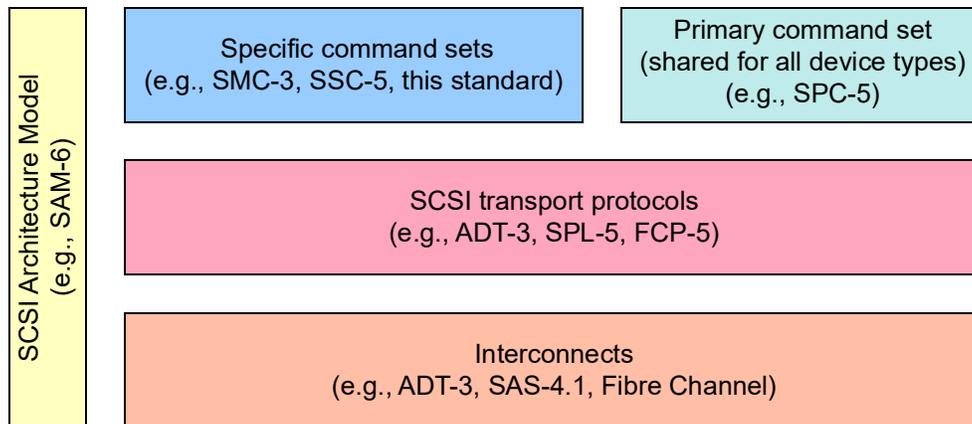


Figure 1 — SCSI document structure

Figure 1 is intended to show the general relationship of the documents to one another and is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture.

The set of SCSI standards specifies the interfaces, functions, and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability. See SAM-6 for more information about the relationships between the SCSI standards.

American National Standard

INCITS 541**American National Standard
for Information Technology -****Automation/Drive Interface Commands - 4 (ADC - 4)****1 Scope**

This standard defines the model and command set extensions to facilitate operation of automation/drive interface devices. The clauses of this standard, implemented in conjunction with the applicable clauses of SPC-5, fully specify the standard command set for automation/drive interface devices.

The objective of this standard is to:

- a) permit an application client to communicate over a SCSI service delivery subsystem, with a logical unit that declares itself to be an automation/drive interface device in the PERIPHERAL DEVICE TYPE field of the standard INQUIRY data (see SPC-5);
- b) define commands unique to the automation/drive interface device type; and
- c) define commands and parameters to manage the operation of the automation/drive interface device type and the operation of logical units of other specific device types that are present in the same device as the automation/drive interface logical unit.

2 Normative References

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 For more information on approved ANSI standards, approved and draft international and regional standards (ISO, IEC), and approved and draft foreign standards (including JIS, and DIN) see <https://www.ansi.org>.

INCITS 545, *Information Technology - Fibre Channel - Framing And Signaling - 5 (FC-FS-5)* (under national consideration)

INCITS 563, *Information Technology - Fibre Channel Protocol for SCSI - 5 (FCP-5)* (under national consideration)

INCITS 546-2021, *Information Technology - SCSI Architecture Model - 6 (SAM-6)*

INCITS 567, *Information Technology - Serial Attached SCSI - 4.1 (SAS-4.1)* (under national consideration)

INCITS 484-2012, *Information Technology - SCSI Media Changer Commands - 3 (SMC-3)*

INCITS 502-2019, *Information Technology - SCSI Primary Commands - 5 (SPC-5)*

INCITS 554, *Information Technology - SAS Protocol Layer - 5 (SPL-5)* (under national consideration)

INCITS 503-2022, *Information Technology - SCSI Stream Commands - 5 (SSC-5)*

ISO/IEC 10646:2003, *Information technology - Universal Multiple-Octet Coded Character Set (UCS)*

ISO/IEC 14165-122, *Fibre Channel Arbitrated Loop - 2 (FC-AL-2)* [INCITS 332-1999]
[INCITS 332/AM1-2003]
[INCITS 332/AM2-2006]

ISO/IEC 14776-115, *Information Technology - SCSI Parallel Interface - 5 (SPI-5)*

NOTE 2 - For more information on the standards published by the IEEE Standards Association see <https://standards.ieee.org>.

IEEE 802.1AB, *Station and Media Access Control Connectivity Discovery*

IEEE 802.1Q, *Virtual LANs*

IEEE 802.1Qbb, *IEEE Standard for Local and metropolitan area networks--Media Access Control (MAC) Bridges and Virtual Bridged Local Area Networks--Amendment 17: Priority-based Flow Control*

IEEE 802.3, *IEEE Standard for Ethernet*

IEEE 802.3x, *IEEE Standards for Local and Metropolitan Area Networks: Specification for 802.3 Full Duplex*

NOTE 3 - For more information on the RFC's and standards published by the Internet Engineering Task Force (IETF) see <https://www.ietf.org>.

RFC 768, User Datagram Protocol

RFC 791, Internet Protocol

RFC 793, Transmission Control Protocol

RFC 1122, Requirements for Internet Hosts -- Communication Layers

RFC 2460, Internet Protocol, Version 6 (IPv6) Specification

RFC 2469, A Caution On The Canonical Ordering Of Link-Layer Addresses

RFC 2474, Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers

RFC 2475, An Architecture for Differentiated Services

RFC 3629, UTF-8, a transformation format of ISO 10646

RFC 3721, Internet Small Computer Systems Interface (iSCSI) Naming and Discovery

RFC 4632, Classless Inter-domain Routing (CIDR): The Internet Address Assignment and Aggregation Plan

RFC 4861, Neighbor Discovery for IP version 6 (IPv6)

RFC 7042, IANA Considerations and IETF Protocol and Documentation Usage for IEEE 802 Parameters

RFC 7143, iSCSI Protocol (Consolidated)

For more information on the SFF specifications published by Storage Networking Industry Association (SNIA), see <https://www.snia.org/technology-communities/sff/specifications>.

SFF-8472, Diagnostic Monitoring Interface for Optical Transceivers

3 Definitions, symbols, abbreviations, and conventions

3.1 Definitions

3.1.1 ADC device server

device server (see 3.1.16) that reports the value 12h in the PERIPHERAL DEVICE TYPE field of its standard INQUIRY data

Note 1 to entry: see SPC-5.

3.1.2 ADC logical unit

logical unit (see 3.1.23) containing an ADC device server (see 3.1.1)

3.1.3 ADI port

port used to connect an automation device (see 3.1.8) and a DT device (see 3.1.14), that is not a DT device primary port (see 3.1.15) and not an automation device primary port (see 3.1.10).

Note 1 to entry: An ADI port supports a transport protocol that passes SCSI requests and SCSI responses (e.g., ADT or USB)

3.1.4 additional sense data

combination of values in an ASC field and an ASCQ field

Note 1 to entry: See 5.2.

3.1.5 ADT port

ADI port that implements ADT

3.1.6 application client

object that is the source of commands and task management function requests

Note 1 to entry: see SAM-6.

3.1.7 automation application client

in an automation device, the application client of the ADC device server in the DT device

Note 1 to entry: See 4.1.

3.1.8 automation device

SCSI device server which returns a peripheral device type (see SPC-5) of medium changer device (i.e., 08h),

Note 1 to entry: See 4.1.

Note 2 to entry: See SMC-3.

3.1.9 automation device attributes

properties of an automation device that are set by a SET AUTOMATION DEVICE ATTRIBUTES command

Note 1 to entry: See 5.5.

3.1.10 automation device primary port

SCSI target port or a SCSI initiator port (see SAM-6) in an automation device (see 3.1.8)

3.1.11 bridging

DT device (see 3.1.14) facilitating invocation of commands or task management requests on the remote SMC logical unit

Note 1 to entry: See 4.3.

3.1.12 bridging manager

in a DT device implementing bridging (see 4.3), the application client of the remote SMC device server (see 3.1.32)

3.1.13 byte

sequence of eight contiguous bits considered as a unit

3.1.14 data transfer (DT) device

device containing an RMC device server, an ADC device server, one or more ports to access an automation device (e.g., an ADI port), and one or more DT device primary ports (see 4.1).

Note 1 to entry: See 4.2.

3.1.15 data transfer (DT) device primary port

SCSI target port in a data transfer device (see 3.1.14)

3.1.16 device server

object within the logical unit that processes SCSI tasks according to the rules for task management

Note 1 to entry: See SAM-6.

3.1.17 DT device management interface

interface outside the scope of this standard that allows configuration and control of a DT device

3.1.18 field

group of one or more contiguous bits.

3.1.19 I_T nexus

nexus that exists between a SCSI initiator port and a SCSI target port

Note 1 to entry: See SAM-6.

3.1.20 I_T_L nexus

nexus between a SCSI initiator port, a SCSI target port, and a logical unit

Note 1 to entry: See SAM-6.

3.1.21 local SMC device server

SMC device server in a DT device implementing bridging

Note 1 to entry: See 4.3.

3.1.22 local SMC logical unit

SMC logical unit (see 3.1.44) in a DT device containing a local SMC device server (see 3.1.21)

3.1.23 logical unit

SCSI target device object, containing a device server and task manager, that implements a device model and manages tasks to process commands sent by an application client

Note 1 to entry: See SAM-6.

3.1.24 logical unit number (LUN)

identifier for a logical unit

3.1.25 logical unit reset

logical unit action in response to a logical unit reset event in which the logical unit performs the operations described in SAM-6

Note 1 to entry: See SAM-6.

3.1.26 logical unit reset event

event that triggers a logical unit reset from a logical unit

Note 1 to entry: See SAM-6.

3.1.27 MAC Address

EUI-48 Ethernet interface identifier as defined by RFC 7042

Note 1 to entry: The IEEE maintains a tutorial describing MAC addresses at <http://standards.ieee.org/develop/regauth/tut/macgrp.pdf>.

Note 2 to entry: The IEEE maintains a tutorial describing EUI-48 at <http://standards.ieee.org/regauth/oui/tutorials/EUI48.html>.

3.1.28 medium

operational substrate that is part of a removable volume

Note 1 to entry: See SSC-5.

3.1.29 nexus

relationship between two SCSI devices, and the SCSI initiator port and SCSI target port objects within those SCSI devices

3.1.30 object

entity with a well-defined boundary and identity that encapsulates state and behavior

Note 1 to entry: All objects are instances of classes (i.e., a concrete manifestation of a class is an object).

3.1.31 device entity

object in a SCSI target device that performs operations on a volume, stores parameters, and communicates between device servers

Note 1 to entry: See SSC-5.

3.1.32 remote SMC device server

SMC device server in an automation device that receives commands via a DT device implementing bridging

Note 1 to entry: See 4.3.

3.1.33 remote SMC logical unit

SMC logical unit (see 3.1.44) in an automation device containing a remote SMC device server (see 3.1.32)

3.1.34 removable medium commands (RMC)

generic term for a command set supporting removable volumes (e.g., SSC-5)

3.1.35 reservation loss

event caused by the release of a reserve/release method reservation (see SPC-2) or by the transition within the device server from the state where a persistent reservation holder exists to the state where a persistent reservation holder does not exist

Note 1 to entry: See SPC-5.

3.1.36 RMC device server

device server (see 3.1.16) that supports removable medium commands (see 3.1.34)

3.1.37 RMC logical unit

logical unit (see 3.1.23) containing an RMC device server (see 3.1.36)

3.1.38 SCSI initiator device

SCSI device containing application clients and SCSI initiator ports that originates device service and task management requests to be processed by a SCSI target device and receives device service and task management responses from SCSI target devices

3.1.39 SCSI initiator port

SCSI initiator device object that acts as the connection between application clients and the service delivery subsystem through which requests, indications, responses, and confirmations are routed

3.1.40 SCSI target device

SCSI device containing logical units and SCSI target ports that receives device service and task management requests for processing and sends device service and task management responses to SCSI initiator devices

3.1.41 SCSI target port

SCSI target device object that contains a task router and acts as the connection between device servers and task managers and the service delivery subsystem through which indications and responses are routed

3.1.42 sense masking timeout value (SM_TOV)

period of time for which a DT device masks sense data

Note 1 to entry: See 4.5.

3.1.43 SMC device server

device server (see 3.1.16) that reports the value 08h in the PERIPHERAL DEVICE TYPE field of its standard INQUIRY data

Note 1 to entry: See SPC-5.

3.1.44 SMC logical unit

logical unit (see 3.1.23) containing an SMC device server (see 3.1.43)

3.1.45 storage element

component of a media changer device used only for storage of a volume

Note 1 to entry: See SMC-3.

3.1.46 task

object within the logical unit representing the work associated with a command

3.1.47 task management request

request that a task management function be performed

Note 1 to entry: See SAM-6.

3.1.48 task set

group of tasks within a logical unit (see 3.1.23), whose interaction is dependent on the task management and auto-contingent allegiance rules (see SAM-6).

3.1.49 UTF-8

character set that is a transformation format of the character set defined by ISO 10646, the Universal Coded Character Set (UCS)

Note 1 to entry: See RFC 3629.

3.1.50 volume

recording medium together with its physical carrier, which is removable from a DT device

3.2 Abbreviations

ADC	Automation/Drive Interface - Commands
ADC-4	Automation/Drive Interface - Commands - 4
ADI	Automation/Drive Interface
ADT	Automation/Drive Transport
ADT-3	Automation/Drive Transport - 3
DT	data transfer (e.g., DT device)
FC-AL-2	Fibre Channel Arbitrated Loop - 2 (see clause 2)
FC-FS-5	Fibre Channel Framing and Signaling Interface - 5 (see clause 2)
FCP-5	Fibre Channel Protocol - 5 (see clause 2)
Gb/sec	gigabits per second
LSB	least significant bit
LUN	logical unit number
MAM	medium auxiliary memory (see SPC-5)
MSB	most significant bit
n/a	not applicable
RMC	removable medium commands (see 3.1.34)
Rsvd	reserved
SAM-6	SCSI Architecture Model - 6 (see clause 2)
SAS-4.1	Serial Attached SCSI - 4.1 (see clause 2)
SCSI	Small Computer System Interface
SM_TOV	sense masking timeout value (see 4.5)
SMC	SCSI Media Changer Commands
SMC-3	SCSI Media Changer Commands - 3 (see clause 2)
SPC-5	SCSI Primary Commands - 5 (see clause 2)
SPI-5	SCSI Parallel Interface - 5 (see clause 2)
SPL-5	SAS Protocol Layer - 5 (see clause 2)
SSC-5	SCSI Stream Commands - 5 (see clause 2)
VHF	very high frequency (e.g., VHF data descriptor)
VPD	vital product data (see SPC-5)

3.3 Keywords

3.3.1 invalid

A keyword used to describe an illegal or unsupported bit, byte, word, field or code value.

Note 1 to entry: receipt by a device server of an invalid bit, byte, word, field or code value shall be reported as an error.

3.3.2 mandatory

keyword indicating an item that is required to be implemented as defined in this standard.

3.3.3 may

keyword that specifies flexibility of choice with no implied preference.

3.3.4 may or may not

keyword that specifies flexibility of choice with no implied preference.

Note 1 to entry: Significant uses of “may or may not” occur in descriptions where attention is being drawn to the “may not” case.

3.3.5 obsolete

keyword indicating that an item was defined in prior SCSI standards but has been removed from this standard.

3.3.6 option, optional

keywords that describes features that are not required to be implemented by this standard.

Note 1 to entry: If any optional feature defined by this standard is implemented, then it shall be implemented as defined in this standard.

3.3.7 prohibited

keyword used to describe a feature, function, or coded value that is defined in a non-SCSI standard (i.e., a standard that is not a member of the SCSI family of standards) to which this standard makes a normative reference where the use of said feature, function, or coded value is not allowed for implementations of this standard.

3.3.8 reserved

keyword referring to bits, bytes, words, fields and code values that are set aside for future standardization.

Note 1 to entry: A reserved bit, byte, word or field shall be set to zero, or in accordance with a future extension to this standard.

Note 2 to entry: Recipients are not required to check reserved bits, bytes, words, or fields for zero values.

Note 3 to entry: Receipt of reserved code values in defined fields shall be reported as an error.

3.3.9 restricted

keyword referring to bits, bytes, words, and fields that are set aside for other identified standardization purposes

Note 1 to entry: A restricted bit, byte, word, or field shall be treated as a reserved bit, byte, word, or field in the context where the restricted designation appears.

3.3.10 shall

keyword indicating a mandatory requirement.

Note 1 to entry: Designers are required to implement all such mandatory requirements to ensure interoperability with other products that conform to this standard.

3.3.11 should:

keyword indicating flexibility of choice with a preferred alternative.

3.3.12 vendor specific

something (e.g., a bit, field, code value) that is not defined by this standard

Note 1 to entry: Specification of the referenced item is determined by the device vendor and may be used differently in various implementations.

3.4 Editorial conventions

Certain words and terms used in this standard have a specific meaning beyond the normal English meaning. These words and terms are defined either in the glossary or in the text where they first appear.

Upper case is used when referring to the name of a numeric value defined in this specification or a formal attribute possessed by an entity. When necessary for clarity, names of objects, procedure calls, arguments or discrete states are capitalized or set in bold type. Names of fields are identified using small capital letters (e.g., NACA bit).

Quantities having a defined numeric value are identified by large capital letters (e.g., CHECK CONDITION). Quantities having a discrete but unspecified value are identified using small capital letters. (e.g., TASK COMPLETE, indicates a quantity returned by the **Execute Command** procedure call). Such quantities are associated with an event or indication whose observable behavior or value is specific to a given implementation standard.

Lists sequenced by lowercase or uppercase letters show no ordering relationship between the listed items.

EXAMPLE 1 - The following list shows no relationship between the colors named:

- a) various forms of red such as:
 - a) crimson; or
 - b) amber;
- b) blue; or
- c) green.

Lists sequenced by numbers show an ordering relationship between the listed items.

EXAMPLE 2 - The following list shows an ordered relationship between the named items:

- 1) top;
- 2) middle; and
- 3) bottom.

Lists are associated with an introductory paragraph or phrase, and are numbered relative to that paragraph or phrase (i.e., all lists begin with an a) or 1) entry).

If a conflict arises between text, tables, or figures, then the order of precedence to resolve the conflicts is:

- 1) text;
- 2) tables; and
- 3) figures.

Not all tables or figures are fully described in the text.

Notes and examples do not constitute any requirements.

Notes are numbered consecutively throughout this standard.

3.5 Numeric and character conventions

A binary number is represented in this standard by any sequence of digits comprised of only the Arabic numerals 0 and 1 immediately followed by a lower-case b (e.g., 0101b). Underscores or spaces may be included in binary number representations to increase readability or delineate organizational boundaries (e.g., 00010101 11001110b, 00010101_11001110b, 0 0101 1010b or 0_0101_1010b).

A hexadecimal number is represented in this standard by any sequence of digits comprised of only the Arabic numerals 0 to 9 and/or the upper-case English letters A to F immediately followed by a lower-case h (e.g., FA23h). Underscores or spaces may be included in hexadecimal number representations to increase readability or delineate organizational boundaries (e.g., 3456FDCA 84BD5E7Ah, 3456FDCA_84BD5E7Ah, B FD8C FA23h, or B_FD8C_FA23h).

A decimal number is represented in this standard by any sequence of digits comprised of only the Arabic numerals 0 to 9 not immediately followed by a lower-case b or lower-case h (e.g., 25).

Variables (i.e., alphanumeric names that represent values in computations and other statements) are represented in the same San-serif font as other information in this standard.

This standard uses the following conventions for representing decimal numbers:

- a) the decimal separator (i.e., separating the integer and fractional portions of the number) is a period;
- b) the thousands separator (i.e., separating groups of three digits in a portion of the number) is a space;
- c) the thousands separator is used in both the integer portion and the fraction portion of a number. and
- d) the decimal representation for a year is 1999 not 1 999.

Table 1 shows some examples of decimal numbers represented using various conventions.

Table 1 — Numbering conventions

French	English	This standard
0,6	0.6	0.6
3,141 592 65	3.14159265	3.141 592 65
1 000	1,000	1 000
1 323 462,95	1,323,462.95	1 323 462.95

A decimal number represented in this standard with an overline over one or more digits following the decimal point is a number where the overlined digits are infinitely repeating (e.g., $666.\overline{6}$ means $666.666\ 666.$ or $666\ 2/3$ and $12.\overline{142\ 857}$ means $12.142\ 857\ 142\ 857.$ or $12\ 1/7$).

A range of numeric values is represented in this standard in the form “a to z”, where a is the first value included in the range, all values between a and z are included in the range, and z is the last value included in the range (e.g., the representation “0h to 3h” includes the values 0h, 1h, 2h, and 3h).

3.6 Bit and byte ordering

This subclause describes the representation of fields in a table that defines the format of a SCSI structure (e.g., the format of a CDB).

If a field consists of more than one bit and contains a single value (e.g., a number), the least significant bit (LSB) is shown on the right and the most significant bit (MSB) is shown on the left (e.g., in a byte, bit 7 is the MSB and is shown on the left, and bit 0 is the LSB and is shown on the right). The MSB and LSB are not labeled if the field consists of 8 or fewer bits.

If a field consists of more than one byte and contains a single value, the byte containing the MSB is stored at the lowest address and the byte containing the LSB is stored at the highest address (i.e., big-endian byte ordering). The MSB and LSB are labeled.

If a field consists of more than one byte and always contains multiple fields each with their own values (e.g., a descriptor), then there is no MSB and LSB of the field itself and thus there are no MSB and LSB labels. Each individual field has an MSB and LSB that are labeled as appropriate in the table, if any, that describes the format of the sub-structure having multiple fields.

If a field that consists of more than one byte contains either multiple fields each with their own values or a single value, then:

- a) the MSB and LSB are labeled and they apply as described in this subclause whenever the field contains a single value; and
- b) the labels on constituent fields supersede the single value labels whenever the field contains multiple fields.

If a field contains a text string (e.g., ASCII or UTF-8), the MSB label is the MSB of the first character and the LSB label is the LSB of the last character.

When required for clarity, multiple byte fields may be represented with only two rows in a table. This condition is represented by values in the byte number column not increasing by one in each subsequent table row, thus indicating the presence of additional bytes.

4 General

4.1 Automation/drive interface model overview

An Automation/Drive Interface Commands - 4 (ADC-4) device server provides the means for an automation device (e.g., a media changer) to monitor and control a data transfer (DT) device that supports one of the removable medium command (RMC) sets (e.g., SSC).

An automation device contains:

- a) a SCSI media changer commands (SMC) logical unit, which controls a mechanism to move storage media among DT devices and storage elements;
- b) zero or more automation device primary ports, through which the SMC logical unit receives SCSI commands or task management requests;
- c) an automation application client (see 3.1.7); and
- d) one or more ports through which the automation application client transmits SCSI requests to and receives SCSI responses from the ADC device server in the DT device.

A DT device contains:

- a) an ADC device server;
- b) a removable medium commands (RMC) device server (e.g., an SSC device server), which processes tasks from application clients performing write and read operations;
- c) an optional SMC device server and corresponding bridging manager (see 4.3); and
- d) one or more ports through which the device servers and bridging manager contained within the DT device pass SCSI requests and SCSI responses. At least one of these ports shall be a DT device primary port (see 3.1.15). One or more of these ports may be an ADI port (see 3.1.3).

The automation application client may perform one or more of the following operations, including:

- a) configure the DT device's operational parameters (e.g., SCSI Port ID, Fibre Channel target device name, and Autoload mode);
- b) enable or disable the DT device primary ports (e.g., Parallel SCSI or Fibre Channel);
- c) determine the DT device's status, including the position of the removable volume and whether a medium access command is in process; or
- d) cause the DT device to unload or load a volume, even if its RMC device server is reserved by an application client (see 4.2).

These operations are performed by invoking various commands and task management requests on the ADC logical unit. The application client within the automation device that invokes these requests is called the automation application client. Communication between device servers within the automation device and the automation application client are outside the scope of this standard.

Figure 2 shows an example hardware view of the relationship between an automation device and DT devices using ADI ports.

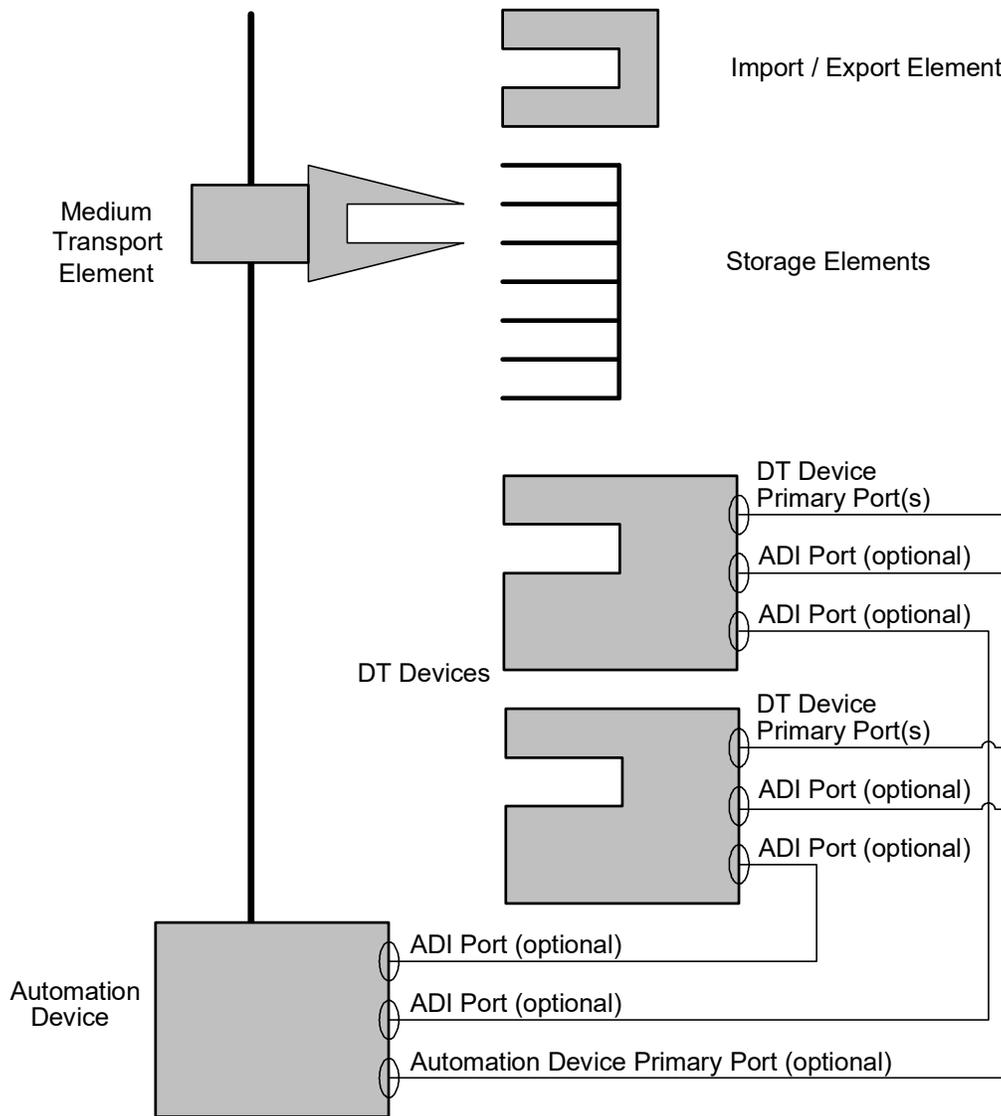


Figure 2 — Example of an automation device and DT device relationship

4.2 Device server interaction

Figure 3 shows:

- a) an automation device with an automation application client and a remote SMC device server; and
- b) a DT device with an RMC device server, an ADC device server, and an optional local SMC device server (see 4.3).

Because the RMC and ADC device servers coexist within a single target device and serve the same physical device, they interact with each other in various ways.

If enabled (see 6.3.2.6.2), then the RMC device server shall be accessible as a logical unit through a DT device primary port. If the DT device contains an ADI port, then the RMC device server should be accessible as a logical unit through an ADI port, and may support asymmetric logical unit access (see SPC-5).

The ADC device server may be accessible as a logical unit through a DT device primary port. If the DT device does not contain an ADI port, then the ADC device server shall be accessible as a logical unit through a DT device primary port. If the DT device contains an ADI port, then the ADC device server shall be accessible as a logical unit through an ADI port.

PREVENT ALLOW MEDIUM REMOVAL commands (see SPC-5) issued to the RMC device server shall not affect the ADC device server.

Sense data reported by the RMC device server may be masked (see 4.5) for a period of time while the automation device is in the process of loading a volume. The NOTIFY DATA TRANSFER DEVICE command (see 5.2) provides a mechanism for the automation application client to indicate that the load attempt has ended in a failure and the RMC device server that was masking sense data changes shall resume reporting sense data for the failure.

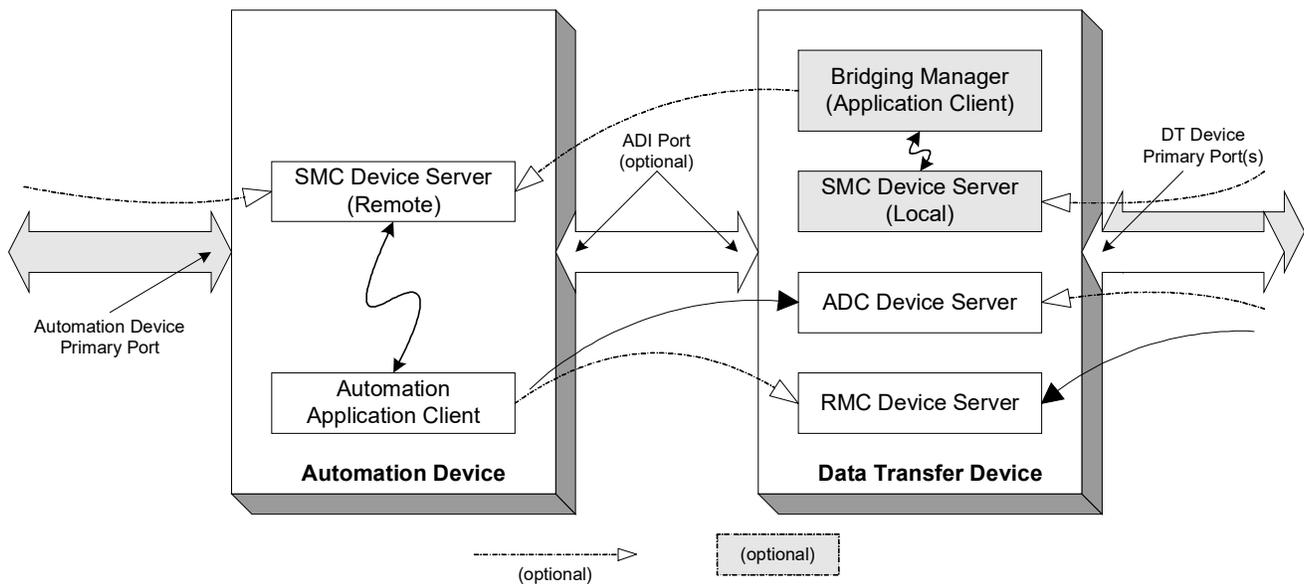


Figure 3 — Device server model

Since the RMC and ADC device servers share the same physical device, operations related to the physical device may cause interaction between the RMC and ADC device servers. Unit attention conditions shall be established by both the RMC and ADC device servers for causes based on the shared physical device (e.g., pressing an eject button on the physical device). Unit attention conditions shall not be propagated across both the RMC and ADC device servers for causes that are strictly within the domain of one device server.

The ADC device server shall not support reservations. The ADC device server avoids reservation conflicts with other device servers since reservations held against one device server do not affect other device servers.

The ADC device server supports mode pages that affect the RMC device server (see 6.3.2.6.2). The ADC mode pages override some mode parameters of the RMC device server (e.g., load or unload behavior).

Some commands supported by the ADC device server are dependent upon the readiness of the removable volume (see table 7). The response to a TEST UNIT READY command (see SPC-5) issued to the ADC device server indicates the readiness of the removable volume. The ADC device server shall establish a unit attention condition with an additional sense code of NOT READY TO READY CHANGE, MEDIUM MAY HAVE CHANGED based on the transition from not ready to ready of the removable volume.

A LOAD UNLOAD command (see SSC-5) processed by the ADC device server may affect the ready state of the RMC device server and shall cause the RMC device server to establish appropriate unit attention conditions, if any. A LOAD UNLOAD command processed by the RMC device server may affect the ready state of the ADC device server and shall cause the ADC device server to establish appropriate unit attention condition. The interaction between the ADC task set and other task sets within the DT device are vendor-specific.

The RMC and ADC device servers maintain independent TapeAlert flags (see 4.6) and return them to application clients. Retrieving the TapeAlert flag information from the ADC device server has no impact on the TapeAlert flags reported by the RMC device server. Retrieving the TapeAlert flag information from the RMC device server has no impact on the TapeAlert flags reported by the ADC device server.

Communication within a data transfer device and within an automation device is outside the scope of this standard.

4.3 ADI bridging

4.3.1 ADI bridging introduction

The DT device may support ADI bridging for the automation device. When ADI bridging is enabled via the ENABLE bit of the SMC Logical Unit descriptor (see 6.3.2.6.3), the DT device shall contain the bridging manager and the local SMC device server (see figure 3). The DT device shall report to its DT device primary port(s) a local SMC logical unit (see 3.1.22), and the automation device shall report a remote SMC logical unit (see 3.1.33) to the automation device ADI port. The local SMC logical unit may be accessible through the DT device ADI port, and may support asymmetric logical unit access (see SPC-5).

The local SMC logical unit receives a command or task management request via a DT device primary port. In processing the command or task management request, the local SMC logical unit may require the automation device to perform additional processing. To perform this additional processing:

- 1) the local SMC logical unit passes requests to an application client in the DT device (i.e., the bridging manager);
- 2) the bridging manager processes each request and determines whether the automation device is required to perform additional processing;
- 3) if additional processing is required, then:
 - 1) a bridging manager that is holding SCSI commands (see 4.3.4.3) shall wait to perform the additional processing until the bridging manager is no longer holding SCSI commands;
 - 2) the bridging manager creates commands, parameter data (if any), and task management functions required to perform the additional processing;
 - 3) the bridging manager uses an ADI port on the DT device to send the commands or the task management requests to the remote SMC logical unit;
 - 4) the remote SMC logical unit processes the command(s) and returns parameter data and statuses or processes the task management function(s) and returns task management responses; and
 - 5) the bridging manager uses the parameter data and statuses or task management responses to complete the additional processing;
- 4) the bridging manager passes responses back to the local SMC logical unit.

Communication between the local SMC logical unit and the bridging manager is performed by means outside the scope of this standard.

4.3.2 Local SMC device server operation

ADI bridging is enabled and disabled via the SMC Logical Unit descriptor (see 6.3.2.6.3) of the ADC Device Server Configuration mode page implemented by the ADC device server. The descriptor specifies the logical unit number of the corresponding local SMC device server. When bridging is disabled, the SMC logical unit shall not be included in the logical unit inventory (see SPC-5) and shall be considered an incorrect logical unit by the task routers (see SAM-6).

The local SMC device server shall support commands as required by the SCSI media changer device type. The local SMC logical unit shall process commands and task management functions that require knowledge of the originating initiator port.

If any of the following commands are supported, then they shall be processed by the local SMC device server and not passed through to the remote SMC device server:

- a) RESERVE(6) and RESERVE(10) (see SPC-2);
- b) RELEASE(6) and RELEASE(10) (see SPC-2);
- c) PERSISTENT RESERVE IN (see SPC-5);
- d) PERSISTENT RESERVE OUT (see SPC-5);
- e) REPORT LUNS (see SPC-5); or
- f) REQUEST SENSE (see SPC-5).

The local SMC device server shall also perform the following actions:

- a) check for reservation conflicts on all commands and return RESERVATION CONFLICT status on all commands that violate reservation rules (see SPC-5); and
- b) manage unit attention conditions established for multiple initiator ports. If the local SMC device server detects that a unit attention condition is pending for an initiator port when a new command is received, then the local SMC device server shall return CHECK CONDITION status for the command.

The local SMC device server may augment information returned by the remote SMC device server based on information known only by the local SMC device server (e.g., Device Identification VPD page designation descriptors with an ASSOCIATION FIELD set to 01b (i.e., target port) and supported operation codes).

The local SMC device server may process the following commands without passing them through to the remote SMC device server:

- a) REPORT SUPPORTED OPERATION CODES (see SPC-5); and
- b) REPORT SUPPORTED TASK MANAGEMENT FUNCTIONS (see SPC-5).

4.3.3 Remote SMC device server operation

The remote SMC device server shall not support any protocol-specific mode pages or protocol-specific log pages.

The remote SMC device server shall not report Device Identification VPD page designation descriptors with an ASSOCIATION FIELD set to 01b (i.e., target port).

The automation application client shall report all unit attention conditions established in the remote SMC device server for all initiator ports to the ADC device server using the NOTIFY DATA TRANSFER DEVICE command (see 5.2).

4.3.4 Bridging manager operation

4.3.4.1 Bridging manager operation overview

ADI bridging is enabled and disabled via the SMC Logical Unit descriptor (see 6.3.2.6.3) of the ADC Device Server Configuration mode page implemented by the ADC device server . The descriptor specifies the logical unit number of the corresponding remote SMC device server.

After issuing a command to the remote SMC device server, the bridging manager shall not issue another command to the remote SMC device server until the previous command completes or is aborted.

If an I_T nexus loss is reported by an ADI port to the bridging manager during the processing of a command issued to the remote SMC device server, and reissuing the failed command to the remote SMC device server a vendor specific number of times fails to establish an I_T nexus, then the bridging manager shall report a CHECK CONDITION status with the sense key set to ABORTED COMMAND and the additional sense code set to LOGICAL UNIT COMMUNICATION FAILURE to the local SMC device server.

4.3.4.2 Processing of CHECK CONDITION status

If the bridging manager receives a response from the remote SMC device server with a CHECK CONDITION status with the sense key set to UNIT ATTENTION and a NOTIFY DATA TRANSFER DEVICE command with the broadcast unit attention (BUA) bit set to one has not been received since the command was issued to the remote SMC device server, then the bridging manager shall:

- a) discard the response; and
- b) reissue the command.

If the bridging manager receives a response from the remote SMC device server with a CHECK CONDITION status with the sense key set to UNIT ATTENTION and a NOTIFY DATA TRANSFER DEVICE command with the BUA bit set to one has been received since the command was issued to the remote SMC device server, then the bridging manager shall:

- a) perform the following actions:
 - A) discard the response;
 - B) not reissue the command; and
 - C) allow the broadcast unit attention request to be processed (i.e., by the local SMC device server);or
- b) perform the following actions:
 - A) discard the response; and
 - B) reissue the command.

If the bridging manager receives a response from the remote SMC device server with a CHECK CONDITION status with the sense key set to UNIT ATTENTION and a NOTIFY DATA TRANSFER DEVICE command with the BUA bit set to one has been received since the command was issued to the remote SMC device server, then the bridging manager should:

- a) discard the response;
- b) not reissue the command; and
- c) allow the broadcast unit attention request to be processed (i.e., by the local SMC device server);

All other responses with a status of CHECK CONDITION, including those with a sense key of NOT READY, shall be returned to the local SMC device server.

4.3.4.3 Holding SCSI commands

The automation device may request the bridging manager to hold SCSI commands for the remote SMC device server by setting the HC bit of the NOTIFY DATA TRANSFER DEVICE command (see 5.2) to one.

See 4.3.1 for the bridging manager command processing while holding SCSI commands.

The bridging manager shall hold SCSI commands until:

- a) the bridging manager is requested to not hold SCSI commands by a NOTIFY DATA TRANSFER DEVICE command with the HC bit set to zero;
- b) a vendor-specific watchdog timer expires;
- c) the local SMC device server processes a logical unit reset; or
- d) the ADC device server processes a logical unit reset.

4.3.5 Caching SMC data and status

The local SMC device server may preserve some data or status received from the remote SMC device server in a cache, in order to respond to certain commands without need for the bridging manager to invoke a command on the remote SMC device server (e.g., the local SMC device server may save the standard INQUIRY data from the remote SMC device server and return the data to any initiator port that requests it). The local SMC device server shall invalidate any data and status previously saved in a cache if the ENABLE bit in the SMC Logical Unit descriptor (see 6.3.2.6.3) is set to zero or the CACHE bit in the SMC Logical Unit descriptor is set to zero.

Caching of SMC ready state, standard INQUIRY data (see SPC-5, VPD data, mode data, and supported operation codes) is controlled by the CACHE bit in the SMC Logical Unit descriptor (see 6.3.2.6.3). When the CACHE bit is set to one, caching is enabled. If caching is enabled, then the automation application client shall send the NOTIFY DATA TRANSFER DEVICE command (see 5.2) to the ADC device server when events occur that may change data cached by the local SMC device server. When the local SMC device server detects a possible change in the cached data, the local SMC device server shall discontinue using the cached data until the cached data has been updated. An ADC device server that supports setting the CACHE bit to one in the SMC Logical Unit descriptor shall also support a NOTIFY DATA TRANSFER DEVICE command with a value of one in one or more of the mode data changed (MDC) bit, INQUIRY data changed (IDC) bit, not ready state changed (NRSC) bit, and supported operation codes changed (SOCC) bit (see 5.2).

If caching is disabled, then the ADC device server shall ignore the MDC bit, IDC bit, NRSC bit, and SOCC bit in the NOTIFY DATA TRANSFER DEVICE command. If caching is disabled, the automation application client is not required to send a NOTIFY DATA TRANSFER DEVICE command for purposes of indicating changes in cached data. The automation application client may send a NOTIFY DATA TRANSFER DEVICE command to notify the ADC device server of events not related to changes in cached data.

If caching is enabled, then the local SMC device server may cache the ready state (see SMC-3) of the remote SMC device server. If the remote SMC device server is not in the ready state, then the local SMC device server may terminate robotic motion SCSI commands (see SMC-3) with CHECK CONDITION status, with the sense key set to NOT READY, and with the additional sense code set to the additional sense code contained in the cache. Whether the local SMC device server terminates other SCSI commands with CHECK CONDITION status, with the sense key set to NOT READY, and with the additional sense code set to the additional sense code contained in the cache when the remote SMC device server is in the ready state is vendor specific.

4.4 Load status and unload status

4.4.1 Load status and unload status overview

The values of device entity attributes describing load conditions (see SSC-5) and unload conditions (see SSC-5) is indicated by bits reported in the VHF data descriptor (see 6.2.2.2). This information allows automation devices to determine the load status and unload status for coordinating loading and unloading of a volume with the DT device.

See table 2 for the relationship between the bits reported in the VHF data descriptor and the device entity attributes describing load and unload conditions.

Table 2 — Device entity attributes reported in VHF data

Device Entity Attribute	Bit in VHF data
In Transition	INXTN
Robotic Access Allowed	RAA
Volume Present	MPRSNT
Volume Seated	MSTD
Medium Threaded	MTHRD
Volume Mounted	MOUNTED

4.4.2 Load statuses

See table 3 for the relationship of the load statuses indicated in this specification and the load conditions (see SSC-5).

Table 3 — Load statuses and load conditions

Load status	Load condition ^a
(a)	DT device initialized, no volume present
(b)	Early detection of volume placement by DT device
(c)	Acknowledgment of volume control by DT device
(e)	Volume seated
(g)	Medium threaded
(i)	Volume mounted
^a See SSC-5	

All load conditions (see SSC-5) supported by the DT device shall be reported by the ADC device server.

To indicate an error in any of the listed statuses, or to report a status not listed, the RRQST bit in the VHF data descriptor shall be set to one and the INXTN bit shall be set to zero.

An additional external stimulus (e.g., volume movement caused by the automation device or a command from the automation device) is required to leave load condition:

- a) Early detection of volume placement by DT device (i.e., load status (b));
- b) Acknowledgment of volume control by DT device (i.e., load status (c)); and
- c) Medium threaded (i.e., load status (g)).

An example showing use of a few of the statuses is given in table 4.

Table 4 — Load statuses example

Load event	Load Status	Bit in the VHF data descriptor					
		INXTN	RAA	MPRSNT	MSTD	MTHRD	MOUNTED
1) DT device initialized, no volume present	(a)	0	1	0	0	0	0
2) After the automation device pushes a volume into DT device, now seating	n/a	1	0 ^a	1 ^a	0 ^a	0 ^a	0 ^a
3) Volume seated	(e)	0	0	1	1	0	0
4) After seating, medium now threading	n/a	1	0 ^a	1 ^a	1 ^a	0 ^a	0 ^a
5) Medium threaded	(g)	0	0	1	1	1	0
6) Medium threaded, completing load	n/a	1	0 ^a	1 ^a	1 ^a	1 ^a	0 ^a
7) Volume mounted	(i)	0	0	1	1	1	1
^a This bit is invalid due to the in transition condition reported in the INXTN bit and is not required to be set to this value. The value shown here is used to describe the physical condition of the tape drive during this specific transition.							

In the example shown in table 4, the DT device is loaded by the automation device first placing a volume into the DT device, then pushing the volume far enough into the DT device such that the DT device engages the medium and completes the operation in one continuous motion.

- 1) The load sequence begins with the DT device initialized, no volume present and robotic access allowed;
- 2) the automation device then places the volume into the DT device then pushes the volume into the DT device such that volume presence is detected and the DT device assumes control of the volume to begin seating the volume;
- 3) the volume is seated
- 4) the DT device continues transitioning through statuses as it begins threading the medium;
- 5) the medium is threaded;
- 6) the DT device makes final microcode preparations to access the medium (e.g., calibration); and
- 7) the load is complete.

4.4.3 Unload statuses

See table 5 for the relationship of the unload statuses indicated in this specification and the unload conditions (see SSC-5).

Table 5 — Unload statuses and unload conditions

Unload status	Unload condition ^a
(a)	Volume mounted
(e)	DT device unloaded (hold point), seated
(f)	DT device unloaded (hold point), unseated
(g)	Volume ejected, presence detected
(h)	Volume ejected, presence not detected
^a See SSC-5	

All unload conditions (see SSC-5) supported by the DT device shall be reported by the ADC device server.

To indicate an error in any of the listed statuses, or to report a status not listed, the RRQST bit in the VHF data descriptor shall be set to one and the INXTN bit shall be set to zero.

An additional external stimulus (e.g., a command from the automation device) is required to leave unload condition:

- a) DT device unloaded (hold point), seated (i.e., unload status (e)); or
- b) DT device unloaded (hold point), unseated (i.e., unload status (f)).

As an example, during an unload to the hold point sequence the automation device may detect unload status (a) followed by unload status (e), or alternatively unload status (a) followed by unload status (f). During an unload to eject sequence the automation device may detect unload status (a) followed by unload status (h).

4.5 Sense data masking

In the process of loading a volume into a DT device, it may be necessary to retry the load operation in order to overcome transient failures. Retrying the load operation may require removing and re-inserting the volume into the DT device. If an application client is testing the status of the RMC device server, then the application client may see an initial failure even though the loading eventually succeeds and the MOVE MEDIUM command (see SMC-3) to the SMC device returns GOOD status.

If the optional sense data masking feature is implemented, then the RMC device server's true status is not reported to the application client during automation device-initiated loads. Instead, the automation device may retry the load operation while the RMC device server reports that the load operation is still in progress to application clients.

If implemented, then the DT device shall enable sense data masking when the DT device begins loading a volume. The DT device shall disable sense data masking after any of the following occur:

- a) loading succeeds;
- b) loading fails and for a time equal to sense masking timeout value (SM_TOV) the automation device issues no medium access commands and does not remove and re-insert the volume;

- c) the ADC device server receives a NOTIFY DATA TRANSFER DEVICE command with the load failed (LDFAIL) bit set to one (see 5.2); or
- d) the volume is removed and SM_TOV expires before the volume is re-inserted.

While sense data masking is enabled, the RMC device server shall report status and sense data consistent with a normal loading operation.

During the SM_TOV period, the DT device shall not disable sense data masking if:

- a) the automation application client issues a medium access command; or
- b) the automation device removes and re-inserts the volume.

The SM_TOV timer shall be restarted when either the volume is re-inserted or a medium access command is received.

After disabling sense data masking, the RMC device server shall report status and sense data indicating the load is in progress, and not report any failure that is encountered.

The value of SM_TOV is vendor-specific.

4.6 TapeAlert application client interface

The ADC device server supports the TapeAlert behavior specified in SSC-5. The ADC device server shall follow the behavior described in SSC-5 for a TAPLSD bit set to one in the device configuration extension mode page (i.e., the TapeAlert state flags are not set to zero upon retrieval of the TapeAlert Response log page (see 6.2.3), the TapeAlert state flags are set to zero upon removal of the condition that set the flag, see SSC-5).

The ADC device server is not required to maintain unique TapeAlert information for each I_T nexus, and the TapeAlert state flags are not affected by an I_T nexus loss condition (see SAM-6).

The application client is responsible for determining which TapeAlert state flags have changed state upon subsequent retrieval of the TapeAlert Response log page, requiring the application client to maintain at least one previously retrieved TapeAlert Response log page in order to detect differences. The application client may maintain a state change history.

In conjunction with the VHF data descriptor (see 6.2.2.2), the TapeAlert state flags are a primary source of information about the DT device, and should be used to obtain DT device status information. Application clients may retrieve TapeAlert state flags at any time. Application clients should retrieve TapeAlert state flags after receiving from the DT device a VHF data descriptor with the TapeAlert Flags Changed (TAFC) bit to one.

The ADC device server shall maintain the TapeAlert state flags independently of the TapeAlert flags maintained by the RMC device server (i.e., changes to the flags maintained by one device server do not affect the flags maintained by the other device server). Retrieving the TapeAlert state flags from the ADC device server shall not set to zero the TapeAlert state flags maintained by the ADC device server.

The TapeAlert state flags shall be set to zero upon a logical unit reset to either the RMC or ADC device servers. The TapeAlert state flags shall be reported as new states following power on as conditions warrant. In addition to power on, other conditions and events that cause TapeAlert state flags to be set to zero are described in SSC-5.

Many of the TapeAlert state flags are set to zero at the start of the next volume load (see SSC-5), which is defined to be the DT device entering the next load condition, indicated by a change in the load status, upon transition from load condition Volume mounted, indicated by load status (a) (see table 3). The next load condition entered varies

by DT device. If a load sequence is initiated from an unload hold point (i.e., unload status (e) or (f) in table 5), then the start of the next volume load is defined to be the DT device entering the next load condition upon transition from load status (c) or from load status (e).

Other state flags are set to zero following service resolution (see SSC-5). Service resolution is beyond the scope of this standard.

4.7 Medium Auxiliary Memory attributes

ADC device servers shall not modify attributes of type Host (see SPC-5). To change these attributes, the automation application client shall issue the WRITE ATTRIBUTE command (see SPC-5) to the RMC device server.

ADC device servers may modify the VOLUME IDENTIFIER attribute of type Device (see SPC-5).

4.8 DT device primary ports

4.8.1 DT device primary port index

The DT device shall assign a primary port index value that uniquely identifies the DT device primary port relative to other DT device primary ports in the DT device, independent of DT device primary port type. Once assigned, the primary port index value for a DT device primary port shall not be changed as long as the DT device primary port remains on the DT device. A value of 00h is reserved. The primary port index value assigned to a DT device primary port may or may not be the same as the relative target port identifier (see SPC-5) assigned to the port.

4.8.2 Enabling and disabling DT device primary ports

A DT device shall allow the DT device primary port(s) to be disabled and enabled via MODE SELECT commands (see SPC-5) to the ADC device server that modify the DT Device Primary Port mode page (see 6.3.2.1).

The device server shall activate an Encryption Policy Violation TapeAlert flag (see SSC-5) and if the Encryption Policy Violation TapeAlert flag is already activated then the device server should deactivate and reactivate the Encryption Policy Violation TapeAlert flag if:

- a) a command requesting that a DT device primary port be enabled is processed;
- b) the encryption policy required attribute of the device entity (see SSC-5) is set to TRUE; and
- c) the encryption policy established attribute of the device entity (see SSC-5) is set to FALSE.

The automation application client uses the SECURITY PROTOCOL OUT command and the Configure Encryption Policy page (see 6.4.5.3) to establish an encryption policy before enabling DT device primary port(s) if the automation application client sets the encryption policy required attribute to TRUE using the ACEPR bit (see 6.3.2.6.2) in the RMC logical unit descriptor of the Logical Unit mode subpage .

The behavior of a DT device primary port if the port is disabled (see 6.3.2.1) is protocol dependent .

The disabling of a DT device primary port that is not an iSCSI Ethernet port (see 6.3.2.1.5) shall be treated as an I_T nexus loss event (see SAM-6) for any existing I_T nexus associated with that disabled DT device primary port.

The disabling of a DT device primary port that is an iSCSI Ethernet port and that is the last enabled DT device primary port within an iSCSI session's iSCSI target portal group (see RFC 7143) shall be treated as an I_T nexus loss event (see SAM-6) for that iSCSI session. The disabling of a DT device primary port that is an iSCSI Ethernet

port and that is not the last enabled DT device primary port within an iSCSI session's iSCSI target portal group shall not be treated as an I_T nexus loss event for that iSCSI session.

The disabling of a DT device primary port shall clear I_T nexus specific settings that do not persist across an I_T nexus loss (e.g., prevention of volume removal conditions or SPC-2 reservations, associated with commands received through this I_T nexus). If the command disabling a DT device primary port that causes an I_T nexus loss is received through the DT device primary port being disabled, then the ADC device server shall return status for the MODE SELECT command before disabling the DT device primary port.

4.9 Sequential mode operation

Some automation devices support a sequential mode of operation. If an automation device is configured in sequential mode, and there is an SMC device server accessible in the SCSI domain, then the SMC device server behavior is defined in SMC-3. In sequential mode the automation device replaces a volume in the DT device with the next sequential volume in the automation device. A typical sequence of operations is:

- 1) the RMC device server receives and processes a command that requests that the volume be unloaded;
- 2) the automation device detects that an unload of the volume has occurred;
- 3) the automation device removes the current volume from the DT device and returns the volume to its storage element;
- 4) the automation device moves the next volume from a storage element to the DT device; and
- 5) the RMC device server becomes ready for access.

The automation device may use the HIU bit in the VHF data descriptor (see 6.2.2.2) to aid in the detection of an unloaded volume in step 2 of the sequence of operation shown in this subclause.

4.10 ADC tape external data encryption control

4.10.1 ADC tape external data encryption control introduction

If the DT device contains an RMC device server that reports itself as an SSC device in the standard INQUIRY data (see SPC-5), then the DT device may support tape logical block encryption and also may support ADC tape external data encryption control. ADC tape external data encryption control may support:

- a) restricting the ability to establish or change a set of tape logical block encryption parameters;
- b) establishing or changing tape logical block encryption parameters via the ADC device server; and
- c) disabling tape logical block encryption algorithms.

If the DT device supports ADC tape external data encryption control, then the ADC device server shall support the:

- a) SECURITY PROTOCOL IN command specifying the Tape Data Encryption security protocol (see 6.4.2);
- b) SECURITY PROTOCOL IN command specifying the Data Encryption Configuration security protocol (see 6.4.3);
- c) SECURITY PROTOCOL OUT command (see SPC-5) specifying the Tape Data Encryption security protocol (see 6.4.4); and
- d) SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol (see 6.4.5).

An automation application client uses ADC tape external data encryption control to control the tape logical block encryption capabilities of the DT device and the tape logical block encryption parameters of the DT device.

If the DT device supports ADC tape external data encryption control, then the DT device accessed by the ADC device server shall contain a logical block encryption parameters control policy parameter. The value in the logical block encryption parameters control policy parameter controls the ability to establish or change logical block encryption parameters within the physical device.

Table 6 shows the values of the logical block encryption parameters control policy.

Table 6 — Logical block encryption parameters control policy (part 1 of 2)

Policy Type	Policy Code	Description	Parameters Control		
			ADC Device Server	RMC Device Server	DT Device Management Interface
Vendor Specific	0000b	Vendor specific	VS	VS	VS
Open	0001b	No interface has taken exclusive control of logical block encryption parameters. This is the default setting for the logical block encryption parameters control policy.	A	A	A ^c
<p>Parameters Control Key:</p> <p>A = Allowed If this device server or DT device management interface supports establishing or changing encryption parameters, then the DT device shall process a command from this device server or DT device management interface attempting to establish or change a set of logical block encryption parameters.</p> <p>P = Prevented The DT device shall reject a command from this device server or DT device management interface attempting to establish or change a set of logical block encryption parameters.</p>					
<p>^a The ADC device server shall terminate a SECURITY PROTOCOL OUT command that attempts to establish or change a set of logical block encryption parameters with CHECK CONDITION status with the sense key set to ILLEGAL REQUEST, and the additional sense code set to DATA ENCRYPTION CONFIGURATION PREVENTED.</p> <p>^b The RMC device server shall terminate a SECURITY PROTOCOL OUT command that attempts to establish or change a set of logical block encryption parameters. See the appropriate command set standard (e.g., SSC-5).</p> <p>^c The commands for establishing or changing a set of logical block encryption parameters via a DT device management interface are beyond the scope of this standard.</p> <p>^d The method for rejecting a command from a DT device management interface is beyond the scope of this standard.</p>					

Table 6 — Logical block encryption parameters control policy (part 2 of 2)

Policy Type	Policy Code	Description	Parameters Control		
			ADC Device Server	RMC Device Server	DT Device Management Interface
ADC exclusive	0010b	The ADC device server has exclusive control of the ability to establish or change logical block encryption parameters and shall report all logical block encryption algorithms in the list of algorithms reported by the DT device.	A	P ^b	P ^d
	0011b	The ADC device server has exclusive control of the ability to establish or change logical block encryption parameters and all algorithms are removed from the list of algorithms reported by the DT device (see SSC-5).	A	P ^b	P ^d
RMC exclusive	0100b	The RMC device server has exclusive control of the ability to establish or change logical block encryption parameters.	P ^a	A	P ^d
DT device management interface exclusive	0101b	The DT device management interface has exclusive control of the ability to establish or change logical block encryption parameters.	P ^a	P ^b	A ^c
	0110b to 1111b	Reserved			
<p>Parameters Control Key: A = Allowed If this device server or DT device management interface supports establishing or changing encryption parameters, then the DT device shall process a command from this device server or DT device management interface attempting to establish or change a set of logical block encryption parameters.</p> <p> P = Prevented The DT device shall reject a command from this device server or DT device management interface attempting to establish or change a set of logical block encryption parameters.</p>					
<p>^a The ADC device server shall terminate a SECURITY PROTOCOL OUT command that attempts to establish or change a set of logical block encryption parameters with CHECK CONDITION status with the sense key set to ILLEGAL REQUEST, and the additional sense code set to DATA ENCRYPTION CONFIGURATION PREVENTED.</p> <p>^b The RMC device server shall terminate a SECURITY PROTOCOL OUT command that attempts to establish or change a set of logical block encryption parameters. See the appropriate command set standard (e.g., SSC-5).</p> <p>^c The commands for establishing or changing a set of logical block encryption parameters via a DT device management interface are beyond the scope of this standard.</p> <p>^d The method for rejecting a command from a DT device management interface is beyond the scope of this standard.</p>					

The logical block encryption parameters control policy type shall be set to Open or shall be left unchanged following:

- a) a hard reset condition; or
- b) other vendor specific events.

An application client or DT device management interface should set the logical block encryption parameters control policy type to a value other than Open before sending a SECURITY PROTOCOL OUT command containing a page attempting to establish a set of logical block encryption parameters. An application client or DT device management interface may set the logical block encryption parameters control policy type to Open to return the logical block encryption parameters control policy to the default setting.

The logical block encryption parameters control policy type is set to Open by sending a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol with a Configure Encryption Policy page (see 6.4.5.3) to the ADC device server with the CONTROL POLICY CODE field set to 0001b.

The logical block encryption parameters control policy type is set to ADC exclusive (i.e., 0010b or 0011b) by sending a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol with a Configure Encryption Policy page to the ADC device server with:

- a) the CONTROL POLICY CODE field set to 0010b; or
- b) the CONTROL POLICY CODE field set to 0011b.

The logical block encryption parameters control policy type is set to RMC exclusive (i.e., 0100b) by sending a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol with a Configure Encryption Policy page to the ADC device server with the CONTROL POLICY CODE field set to 0100b.

The logical block encryption control policy type is set to DT device management interface exclusive (i.e., 0101b) by:

- a) sending a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol with a Configure Encryption Policy page to the ADC device server with the CONTROL POLICY CODE field set to 0101b; or
- b) other vendor specific methods (e.g., a DT device management interface command beyond the scope of this standard).

4.10.2 Disabling a supported logical block encryption algorithm

The automation application client disables a logical block encryption algorithm (see SSC-5) by sending a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol with a Configure Data Encryption Algorithm Support page to the ADC device server with the ALGORITHM INDEX field in a logical block encryption algorithm support descriptor (see 6.4.5.2) set to the algorithm index for the selected logical block encryption algorithm and the DISABLE bit set to one.

4.10.3 Reporting DT device logical block encryption algorithm support

A SECURITY PROTOCOL IN command specifying the Tape Data Encryption security protocol and the Data Encryption Capabilities page processed by the ADC device server returns the set of logical block encryption algorithms supported by the physical device (see SSC-5).

4.10.4 ADC tape external data encryption control of logical block encryption parameters

4.10.4.1 ADC tape external data encryption control of logical block encryption parameters introduction

The SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol and the Configure Encryption Policy page (see 6.4.5.3) is used to configure a decryption parameters request policy, encryption parameters request policy, and encryption parameters request period (see SSC-5).

The SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and a page that provides a set of logical block encryption parameters is used to establish or change a set of logical block encryption parameters for encryption, and establish or change a set of logical block encryption parameters for decryption (see SSC-5).

4.10.4.2 Reporting logical block encryption parameters requests

If configured to do so, the ADC device server shall notify the automation application client of logical block encryption parameters requests (e.g., the DT device includes an SSC-5 compliant device server and has a logical block encryption parameters for encryption request indicator set to TRUE or has a logical block encryption parameters for decryption request indicator set to TRUE, see SSC-5) using the DT Device Status log page very high frequency data log parameter ESR bit (see 6.2.2.2), and the DT device ADC data encryption control status log parameter (see 6.2.2.4).

When processing an encryption parameters request, the ADC device server shall assign a logical block encryption parameters request sequence identifier to uniquely identify the encryption parameters request (see 6.2.2.4). The ADC device server shall maintain the logical block encryption parameters request sequence identifier until it processes a:

- a) SECURITY PROTOCOL OUT command with a Data Encryption Parameters Complete page and a matching value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field; or
- b) new encryption parameters request; or
- c) hard reset condition.

If the DT device requires a set of logical block encryption parameters for logical block encryption, then the ADC device server shall:

- 1) set the encryption parameters request (EPR) bit in the DT device ADC data encryption control status log parameter to one; and
- 2) set the encryption service request (ESR) bit in the VHF data descriptor to one.

If the DT device requires a set of logical block encryption parameters for logical block decryption, then the ADC device server shall:

- 1) set the decryption parameters request (DPR) bit in the DT device ADC data encryption control status log parameter; and
- 2) set the ESR bit in the VHF data descriptor to one.

4.10.4.3 Providing a set of logical block encryption parameters

An automation application client may use ADC tape external data encryption control to provide a set of logical block encryption parameters by:

- 1) monitoring the DT Device Status log page and the DT device ADC data encryption control status log parameter for the encryption parameters request (EPR) bit to be set to one, or the decryption parameters request (DPR) bit to be set to one;

- 2) sending a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Set Data Encryption page to the ADC device server to provide a set of tape logical block encryption parameters; and
- 3) sending a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Data Encryption Parameters Complete page to the ADC device server with the clear encryption parameters request (CEPR) bit set to one or the clear decryption parameters request (CDPR) bit set to one.

4.10.4.4 Logical block encryption parameters required values

The ADC device server shall terminate a SECURITY PROTOCOL OUT command (see SPC-5) attempting to establish or change a set of logical block encryption parameters with CHECK CONDITION status, with the sense key set to ILLEGAL COMMAND, and the additional sense code set to INVALID FIELD IN PARAMETER LIST if the logical block encryption parameters control policy type is set to ADC exclusive and:

- a) the SCOPE field (see SSC-5) is set to a value other than 10b (i.e., ALL I_T NEXUS); or
- b) the LOCK bit (see SSC-5) is set to one.

4.10.4.5 Key management errors

If the automation application client processes a DT device ADC data encryption control status log parameter (see 6.2.2.4) with the encryption parameters request (EPR) bit set to one and is unable to provide a set of logical block encryption parameters for encryption, then the automation application client shall send a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and a Data Encryption Parameters Complete page (see 6.4.4.2) with the AUTOMATION COMPLETE RESULTS field set to the code indicating the reason that it was unable to provide a set of logical block encryption parameters for encryption.

If the automation application client processes a DT device ADC data encryption control status log parameter with the decryption parameters request (DPR) bit set to one and is unable to provide a set of logical block encryption parameters for decryption, then the automation application client shall send a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and a Data Encryption Parameters Complete page with the AUTOMATION COMPLETE RESULTS field set to the code indicating the reason that it was unable to provide a set of logical block encryption parameters for decryption.

If the automation application client receives a DT device ADC data encryption control status log parameter with the decryption parameters request (DPR) bit set to one and:

- 1) provides a set of logical block encryption parameters for decryption; and
- 2) the next DT device ADC data encryption control status log parameter contains a decryption parameters request for the same logical block (e.g., the value in the LOGICAL OBJECT NUMBER field in a Next Block Encryption Status page, see SSC-5).

then the automation application client shall:

- a) send a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and a Data Encryption Parameters Complete page with the AUTOMATION COMPLETE RESULTS field set to 06h (i.e., request that the SSC device server report an additional sense code of INCORRECT DATA ENCRYPTION key, see table 109); or
- b) provide a set of logical block encryption parameters (e.g., a different set of logical block encryption parameters with the same key associated data, see SSC-5).

If the automation application client retries a failed set of logical block encryption parameters, then it shall have an encryption parameters retry limit. If the automation application client sends the DT device a set of logical block encryption parameters during a retry, then the automation application client shall keep track of the number of retries attempted and compare the number of retries to the retry limit before sending a new set of logical block

encryption parameters. When the encryption parameters retry limit is reached, the automation application client shall send a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and a Data Encryption Parameters Complete page with the AUTOMATION COMPLETE RESULTS field set to 06h (see table 109).

If the logical block encryption parameters period has expired in the DT device (e.g., the DT device includes an SSC-5 compliant device server and the logical block encryption period timer expired indicator is set to TRUE, see SSC-5), then the ADC device server shall:

- 1) set the ERROR TYPE field in the key management error data log parameter (see 6.2.2.5) to:
 - a) 0001b (i.e., encryption parameters request error) if the encryption parameters request (EPR) bit in the DT device ADC data encryption control status log parameter (see 6.2.2.4) is set to one; or
 - b) 0010b (i.e., decryption parameters request error) if the decryption parameters request (DPR) bit in the DT device ADC data encryption control status log parameter is set to one;
- 2) set the key timeout (KTO) bit in the key management error data log parameter (see 6.2.2.5) to one; and
- 3) set the key management error (KME) bit in the DT device ADC data encryption control status log parameter to one.

If the KME bit is set to one in the DT device ADC data encryption control status log parameter, then the automation application client should read the key management error data log parameter.

The PARAMETERS REQUEST ERROR SEQUENCE IDENTIFIER field of the key management error data log parameter indicates the logical block encryption parameters request sequence identifier of the request that has failed. If the parameters request sequence identifier does not match a known logical block encryption parameters request sequence identifier, then the key management error was for a previous logical block encryption parameters request and shall be ignored. If the logical block encryption parameters request sequence identifier is known, then the automation application client should abort processing the DT device ADC data encryption control status log parameter with the matching logical block encryption parameters request sequence identifier.

If the parameters request sequence specified by the PARAMETERS REQUEST ERROR SEQUENCE IDENTIFIER has failed, then the reason for the failure is:

- a) a logical block encryption parameters request timeout if the KTO bit is set to one; or
- b) the reason specified in the SENSE KEY field, ADDITIONAL SENSE CODE field, and the ADDITIONAL SENSE CODE QUALIFIER field if the KTO bit is set to zero.

If the abort (ABT) bit is set to one in the DT device ADC data encryption control status log parameters, then the automation application client should abort all logical block encryption parameters requests.

If the encryption parameters request (EPR) bit is set to one or the decryption parameters request (DPR) bit is set to one in the DT device ADC data encryption control status log parameter and a logical block encryption parameters request is in progress, then the automation application client should abort any logical block encryption parameters request with a logical block encryption parameters request sequence identifier that does not match the logical block encryption parameters request sequence identifier in the most recent DT device ADC data encryption control status log parameter.

4.11 ADC control of tape stream mirroring

4.11.1 ADC configuration of tape stream mirroring

The ADC device server may support the SET TAPE STREAM MIRRORING command. The SET TAPE STREAM-MIRRORING command is used to configure tape stream mirroring (see SPC-5 and SSC-5). The ADC device server may support the REPORT TAPE STREAM MIRRORING command (see SSC-5).

See SSC-5 for managing encryption during a tape stream mirroring copy operation.

4.12 Potential conflict list

A DT Device may maintain a potential conflict list. A potential conflict list is a list of entries describing I_T nexuses and commands that have been received where the operations requested by one I_T nexus may conflict with the operations requested by a different I_T nexus (e.g. a rewind requested by one I_T nexus while a different I_T nexus is requesting data transfers). The potential conflict list is reported in potential conflict list log parameters (see 6.2.2.9).

A potential conflict list command is a command that:

- a) has an entry of Conflict under the Excl Access column of the commands that are allowed in the presence of various reservations table of the command standard in which that command is defined; and
- b) is not one of:
 - A) LOG SELECT;
 - B) PERSISTENT RESERVE IN;
 - C) PERSISTENT RESERVE OUT;
 - D) READ ATTRIBUTE;
 - E) RESERVE UNIT (see SPC-2);
 - F) SECURITY PROTOCOL IN;
 - G) SECURITY PROTOCOL OUT;
 - H) TEST UNIT READY; and
 - I) commands chosen for vendor-specific reasons.

The DT device maintains an owner_ITN variable that is set to a value that represents the I_T nexus through which a potential conflict list command was most recently received by the RMC logical unit or the ADC logical unit.

The owner_ITN variable is set to NULL, the PCL_P bit of the extended very high frequency log parameter (see 6.2.2.6) is set to zero, the potential conflict list log parameter(s) (see 6.2.2.9) are destroyed (i.e., no longer exist; the response to a LOG SENSE command does not return the parameter), and the value in the NUMBER OF POTENTIAL CONFLICT LIST ENTRIES field of the potential conflict list entries count log parameter (see 6.2.2.8) is set to zero, if:

- a) a hard reset condition occurs; or
- b) a volume is inserted (i.e., the medium present (MPRSNT) bit of the VHF parameter data transitions from 0b to 1b).

The owner_ITN variable is set to NULL on a reservation loss or a reservation preempt.

If a potential conflict list command is received through an I_T nexus that is not the I_T nexus represented by the owner_ITN variable, the command is not terminated with RESERVATION CONFLICT and:

- a) the owner_ITN variable is non-NULL; or
- b) the owner_ITN variable is NULL, there is no reservation holder, and the addressed LUN is not an ADC LUN,

then the DT device shall:

- 1) if that I_T nexus is not listed in one of the potential conflict list log parameter(s), then:
 - A) if all the potential conflict list log parameters supported by the DT device have been created, then manage the potential conflict list in a vendor specific manner (e.g., stop adding entries to the list or replace an existing entry); or
 - B) create a new potential conflict list entry for this I_T nexus in the potential conflict list, increment the value in the NUMBER OF POTENTIAL CONFLICT LIST ENTRIES field of the potential conflict list entries count log parameter (see 6.2.2.8), and add the new entry to the list of potential conflict list log parameters in a vendor-specific order (e.g., entries in the potential conflict list log parameters may be reordered) with:
 - a) the TRANSPORT ID field set to the TransportID (see SPC-5) of that I_T nexus;
 - b) the RELATIVE TARGET PORT IDENTIFIER field set to the relative target port (see SPC-5) of that I_T nexus; and
 - c) all other fields set to zero;
- 2) select the potential conflict list log parameter with the TRANSPORT ID field value and RELATIVE TARGET PORT IDENTIFIER field value that match the I_T nexus through which the potential conflict list command was received and update the fields in that log parameter as follows:
 - A) increment the OWNER ITN COUNT field, if not saturated at its maximum value;
 - B) set the COMMAND OPERATION CODE field to the operation code of the command;
 - C) set the COMMAND SERVICE ACTION field to the service action, if any, of the command; and
 - D) set the OWNER ITN TIME field to the parameter data returned in response to a REPORT TIMESTAMP command addressed to the ADC device server;
- 3) set the owner_ITN variable to identify the I_T nexus through which the command was received; and
- 4) set the PCL_P bit of the extended very high frequency log parameter to one.

5 Commands for automation/drive interface devices

5.1 Summary of commands for automation/drive interface devices

The command set for automation/drive interface devices is shown in table 7. Commands specified as mandatory in table 7 shall be implemented by automation/drive interface devices.

Table 7 — Command set for automation/drive interface (part 1 of 3)

Command name	Operation code	Type	Reference
ACCESS CONTROL IN	86h	O	SPC-5
ACCESS CONTROL OUT	87h	O	SPC-5
CHANGE ALIASES	A4h/0Bh ^a	O	SPC-5
EXTENDED COPY	83h	O	SPC-5
INQUIRY	12h	M	SPC-5
LOAD UNLOAD	1Bh	M	SSC-5
LOG SELECT	4Ch	O	SPC-5
LOG SENSE	4Dh	M	SPC-5
MODE SELECT(6)	15h	O	SPC-5
MODE SELECT(10)	55h	M	SPC-5
MODE SENSE(6)	1Ah	O	SPC-5
MODE SENSE(10)	5Ah	M	SPC-5
NOTIFY DATA TRANSFER DEVICE	9Fh/1Fh ^a	M	5.2
READ ATTRIBUTE	8Ch	M	SPC-5
READ BUFFER	3Ch	O	SPC-5
READ MEDIA SERIAL NUMBER	ABh/01h ^a	O	SPC-5
Type Key: M = mandatory O = optional			
^a This command is defined by a combination of operation code and service action. The operation code value is shown preceding the slash and the service action value is shown after the slash (see SPC-5). ^b This command is subject to the readiness of the removable volume (i.e., the logical unit is able to process medium-access commands without returning CHECK CONDITION status). Other commands may be subject to readiness of the removable volume due to vendor-specific features. ^c This command is subject to the readiness of the removable volume when the MEDIA bit is set to one. ^d Only mandatory for devices that include an SSC-5 compliant device server. ^e Only self test shall be mandatory.			

Table 7 — Command set for automation/drive interface (part 2 of 3)

Command name	Operation code	Type	Reference
RECEIVE COPY RESULTS	84h	O	SPC-5
RECEIVE DIAGNOSTIC RESULTS	1Ch	O	SPC-5
REPORT ALIASES	A3h/0Bh ^a	O	SPC-5
REPORT AUTOMATION DEVICE ATTRIBUTES	A3/1Eh ^a	O	5.6
REPORT DENSITY SUPPORT ^c	44h	M ^d	SSC-5
REPORT IDENTIFYING INFORMATION	A3h/05h ^a	O	SPC-5
REPORT LUNS	A0h	M	SPC-5
REPORT PRIORITY	A3h/0Eh ^a	O	SPC-5
REPORT SUPPORTED OPERATION CODES	A3h/0Ch ^a	M	SPC-5
REPORT SUPPORTED TASK MANAGEMENT FUNCTIONS	A3h/0Dh ^a	O	SPC-5
REPORT TAPE STREAM MIRRORING	84h/16h ^a	O	SSC-5
REPORT TARGET PORT GROUPS	A3h/0Ah ^a	O	SPC-5
REPORT TIMESTAMP	A3h/0Fh ^a	O	SPC-5
REQUEST SENSE	03h	M	SPC-5
SECURITY PROTOCOL IN	A2h	O	SPC-5
SECURITY PROTOCOL OUT	B5h	O	SPC-5
SEND DIAGNOSTIC	1Dh	M ^e	SPC-5
SET AUTOMATION DEVICE ATTRIBUTES	A4/1Eh ^a	O	5.3
SET IDENTIFYING INFORMATION	A4h/06h ^a	O	SPC-5
SET MEDIUM ATTRIBUTE	A9h/1Fh ^a	O	5.4
Type Key: M = mandatory O = optional			
<p>^a This command is defined by a combination of operation code and service action. The operation code value is shown preceding the slash and the service action value is shown after the slash (see SPC-5).</p> <p>^b This command is subject to the readiness of the removable volume (i.e., the logical unit is able to process medium-access commands without returning CHECK CONDITION status). Other commands may be subject to readiness of the removable volume due to vendor-specific features.</p> <p>^c This command is subject to the readiness of the removable volume when the MEDIA bit is set to one.</p> <p>^d Only mandatory for devices that include an SSC-5 compliant device server.</p> <p>^e Only self test shall be mandatory.</p>			

Table 7 — Command set for automation/drive interface (part 3 of 3)

Command name	Operation code	Type	Reference
SET PRIORITY	A4h/0Eh ^a	O	SPC-5
SET TAPE STREAM MIRRORING	83h/16h ^a	O	5.5
SET TARGET PORT GROUPS	A4h/0Ah ^a	O	SPC-5
SET TIMESTAMP	A4h/0Fh ^a	O	SPC-5
TEST UNIT READY ^b	00h	M	SPC-5
WRITE ATTRIBUTE	8Dh	O	SPC-5
WRITE BUFFER	3Bh	O	SPC-5
Type Key: M = mandatory O = optional			
^a This command is defined by a combination of operation code and service action. The operation code value is shown preceding the slash and the service action value is shown after the slash (see SPC-5). ^b This command is subject to the readiness of the removable volume (i.e., the logical unit is able to process medium-access commands without returning CHECK CONDITION status). Other commands may be subject to readiness of the removable volume due to vendor-specific features. ^c This command is subject to the readiness of the removable volume when the MEDIA bit is set to one. ^d Only mandatory for devices that include an SSC-5 compliant device server. ^e Only self test shall be mandatory.			

5.2 NOTIFY DATA TRANSFER DEVICE command

The NOTIFY DATA TRANSFER DEVICE command (see table 8) notifies the ADC device server of specific events. The NOTIFY DATA TRANSFER DEVICE command does not represent the complete current state of the automation device and is not intended to be sent upon every change in the automation device's state.

If a NOTIFY DATA TRANSFER DEVICE command is received from an I_T nexus with a pending unit attention condition (i.e., before the ADC device server reports CHECK CONDITION status), then the ADC device server shall process the NOTIFY DATA TRANSFER DEVICE command and shall not clear the unit attention condition as described in SAM-6.

The automation application client shall send the NOTIFY DATA TRANSFER DEVICE command when any of the events that the NOTIFY DATA TRANSFER DEVICE command reports have occurred. Multiple events may be reported in the same NOTIFY DATA TRANSFER DEVICE command. The command shall report only those events that have not been previously reported.

Table 8 — NOTIFY DATA TRANSFER DEVICE command

Bit Byte	7	6	5	4	3	2	1	0
0	OPERATION CODE (9Fh)							
1	Reserved			SERVICE ACTION (1Fh)				
2	Reserved							LDFAIL
3	Reserved		HC	SOCC	BUA	NRSC	IDC	MDC
4	ASC							
5	ASCQ							
6	Reserved							
...								
14	CONTROL							
15								

The OPERATION CODE and SERVICE ACTION fields are described in SPC-5.

A load failed (LDFAIL) bit set to one specifies the automation device has detected that the RRQST bit in the VHF data descriptor (see 6.2.2.2) is set to one while the DT device is attempting to load a volume, and the automation device has completed all recovery attempts. A LDFAIL bit set to zero specifies that a load failure has not been detected.

A hold commands (HC) bit set to one specifies that the bridging manager holds SCSI commands from being sent to the remote SMC device server as specified in 4.3.4.3. An HC bit set to zero specifies that the bridging manager does not hold SCSI commands from being sent to the remote SMC device server.

The mode data changed (MDC) bit, INQUIRY data changed (IDC) bit, not ready state changed (NRSC) bit, and supported operation codes changed (SOCC) bit are used to specify that cached SMC data may require refreshing (see 4.3.5).

A supported operation codes changed (SOCC) bit set to one specifies that the list of operation codes supported by the remote SMC device server has changed. Upon successful completion of a NOTIFY DATA TRANSFER command with the SOCC bit set to one, the use of any cached operation code list shall be discontinued until the cached list has been refreshed. A SOCC bit set to zero specifies that the list of operation codes supported by the remote SMC device server has not changed. If the CACHE bit in the SMC Logical Unit descriptor is set to one, then

the ADC device server shall support the SOCC bit set to one, but shall ignore the bit if the operation codes supported by the remote SMC device server are not cached.

A broadcast unit attention (BUA) bit set to one specifies that the ADDITIONAL SENSE CODE (ASC) field and ADDITIONAL SENSE CODE QUALIFIER (ASCQ) field contain the additional sense data that shall be used by the local SMC device server to establish a unit attention condition for all I_T nexuses accessible via the DT device primary ports. If none of the known I_T nexuses are able to have a unit attention condition established by the device server due to insufficient resources, then the device server shall terminate the NOTIFY DATA TRANSFER DEVICE command with a CHECK CONDITION status and set the sense key to ILLEGAL REQUEST and the additional sense code set to INSUFFICIENT RESOURCES. The additional sense data in the ASC field and ASCQ field set to NOT READY TO READY CHANGE, MEDIUM MAY HAVE CHANGED indicates that the remote SMC device server has transitioned to the ready state (see SMC-3). A BUA bit set to zero specifies that the ASC field and ASCQ field contents shall not be used by the local SMC device server to establish a unit attention condition for any I_T nexuses accessible via the DT device primary ports.

A not ready state changed (NRSC) bit set to one indicates that the remote SMC device server has transitioned out of the ready state or that the remote SMC device server is not in the ready state and the sense data has changed. When the NRSC bit is set to one, the ASC field and ASCQ field contain additional sense data appropriate to the condition. Upon successful completion of a NOTIFY DATA TRANSFER command with the NRSC bit set to one, the cached ready state and additional sense data shall be updated. An NRSC bit set to zero indicates that the remote SMC device server has not transitioned out of the ready state. If the remote SMC device server is not in the ready state, then an NRSC bit set to zero indicates that the sense data reporting the reason that the remote SMC device server is not in the ready state has not changed. Other bits or fields in this command may indicate that the sense data has changed for other reasons. If the CACHE bit in the SMC Logical Unit descriptor is set to one, then the ADC device server shall support the NRSC bit set to one, but shall ignore the NRSC bit if the ready state is not cached.

If the NRSC bit and the BUA bit are both set to one, or if both bits are set to zero and either the ASC field or the ASCQ field is not set to zero, then the command shall be terminated with a CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID FIELD IN CDB.

An inquiry data changed (IDC) bit set to one specifies that the contents of the standard INQUIRY data or any VPD page data reported by the remote SMC device server have changed. Upon successful completion of a NOTIFY DATA TRANSFER command with the IDC bit set to one, the use of any cached standard INQUIRY data or VPD pages shall be discontinued until the cached data have been refreshed. An IDC bit set to zero specifies that the contents of the standard INQUIRY data and any VPD page data reported by the remote SMC device server have not changed. If the CACHE bit in the SMC Logical Unit descriptor is set to one, then the ADC device server shall support the IDC bit set to one, but shall ignore the bit if INQUIRY data is not cached.

A mode data changed (MDC) bit set to one specifies that the contents of a mode page or mode parameter header reported by the remote SMC device server have changed. Upon successful completion of a NOTIFY DATA TRANSFER command with the MDC bit set to one, the use of any cached mode data by the local SMC device server (see 4.3.2) shall be discontinued until the cached mode data has been refreshed. An MDC bit set to zero specifies that the contents of the mode page or mode parameter header reported by the remote SMC device server have not changed. If the CACHE bit in the SMC Logical Unit descriptor is set to one (see 6.3.2.6.3), then the ADC device server shall support the MDC bit set to one, but shall ignore the bit if mode data is not cached.

The CONTROL field is described in SAM-6.

5.3 SET AUTOMATION DEVICE ATTRIBUTES command

5.3.1 SET AUTOMATION DEVICE ATTRIBUTES command introduction

The SET AUTOMATION DEVICE ATTRIBUTES command (see table 9) is used to pass attributes of the automation device (e.g., serial number) to the ADC device server. The device server may use any automation attributes set by this command to:

- a) add the attribute to log entries the DT device creates;
- b) provide the attribute to the DT device for use by other device servers;
- c) report the attribute to application clients in response to commands; or
- d) other uses beyond the scope of this standard.

Table 9 — SET AUTOMATION DEVICE ATTRIBUTES command

Bit Byte	7	6	5	4	3	2	1	0
0	OPERATION CODE (A4h)							
1	Reserved			SERVICE ACTION (1Eh)				
2	Reserved							
...								
5								
6	(MSB)	PARAMETER LIST LENGTH						(LSB)
...								
9								
10	Reserved							
11	CONTROL							

The OPERATION CODE, SERVICE ACTION, and PARAMETER LIST LENGTH fields are described in SPC-5.

The CONTROL field is described in SAM-6.

Automation device attributes shall be retained by the device server until:

- a) a SET AUTOMATION DEVICE ATTRIBUTES command is processed that changes the attribute; or
- b) a hard reset condition occurs.

Automation device attributes may or may not be retained after a hard reset condition occurs.

5.3.2 Automation device attributes parameter list format

An automation device attributes parameter list shall have the format shown in table 10. Automation device attributes shall be listed in ascending numerical order based on the ATTRIBUTE IDENTIFIER field (see 5.3.3).

Table 10 — Automation device attributes parameter list format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
...	PARAMETER DATA LENGTH							
3	(LSB)							
	Automation device attribute list							
4	Automation device attribute [first]							
	⋮							
	Automation device attribute [last]							
n								

The PARAMETER DATA LENGTH field shall contain the number of bytes of attribute data.

The format of the automation device attributes is described in 5.3.3.

No automation device attributes shall be changed and a SET AUTOMATION DEVICE ATTRIBUTES command shall be terminated with CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST, if the parameter data contains any of the following:

- a) an automation device attribute with an attribute length that exceeds the maximum length shown in table 12 for that attribute;
- b) an automation device attribute with an unsupported or reserved FORMAT field (see 5.3.3) value;
- c) an automation device attribute with an unsupported value in the ATTRIBUTE VALUE field (see 5.3.3); or
- d) an automation device attribute with a value in the FORMAT field that does not match the value shown in table 12.

If a SET AUTOMATION DEVICE ATTRIBUTES command parameter data contains an automation device attribute with an ATTRIBUTE LENGTH field set to zero, then:

- a) If the automation device attribute is supported, then the attribute shall be changed to the nonexistent state;
or
- b) If the automation device attribute is not supported, then the automation device attribute shall be ignored and this shall not be considered an error.

5.3.3 Automation device attribute format

The automation device attribute format is shown in table 11.

Table 11 — Automation device attribute format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	ATTRIBUTE IDENTIFIER _____ (LSB)							
2	Reserved					FORMAT		
3	Reserved							
4	(MSB) _____							
5	ATTRIBUTE LENGTH (n-5) _____ (LSB)							
6	_____							
n	ATTRIBUTE VALUE _____							

The ATTRIBUTE IDENTIFIER field (see table 12) specifies the automation device attribute to be set.

Table 12 — ATTRIBUTE IDENTIFIER field

Code	Description	Format	Maximum length (bytes)
0000h	Reserved		
0001h	Automation device serial number ^a	ASCII	32
0002h	Data transfer device element address	Binary	4
0003h	Device designation descriptor ^b	Binary	259
0004h to 7FFFh	Reserved		
8000h to FFFFh	Vendor specific		

^a Although the formats may differ, this is the same serial number as reported via the Unit Serial Number VPD page (see SPC-5) by the automation device’s SMC device server that associates this DT device to a data transfer element (see SMC-3).

^b The device designation descriptor shall be a designation descriptor as reported via the Device Identification VPD page (see SPC-5) by the automation device’s SMC device server associated with this DT device. The designation descriptor shall have the ASSOCIATION field set to 00b (i.e., logical unit) and the DESIGNATOR TYPE field set to:

- a) 2h (i.e., EUI-64-based);
- b) 3h (i.e., NAA); or
- c) 8h (i.e., SCSI name string).

The FORMAT field (see table 17) specifies the format of the data in the ATTRIBUTE VALUE field.

The ATTRIBUTE LENGTH field specifies the length in bytes of the ATTRIBUTE VALUE field.

The ATTRIBUTE VALUE field contains the intended value of the automation device attribute.

5.4 SET MEDIUM ATTRIBUTE command

5.4.1 SET MEDIUM ATTRIBUTE command introduction

The SET MEDIUM ATTRIBUTE command (see table 13) is used to pass attributes of the volume to the ADC device server. The device server may use any attributes set by this command to:

- a) add the attribute to log entries the DT device creates;
- b) add the attribute to the device type specific area in the MAM (see SPC-5);
- c) report the attribute to application clients in response to commands or other means beyond the scope of this standard; or
- d) other uses beyond the scope of this standard.

Table 13 — SET MEDIUM ATTRIBUTE command

Bit Byte	7	6	5	4	3	2	1	0
0	OPERATION CODE (A9h)							
1	Reserved			SERVICE ACTION (1Fh)				
2	Reserved							
...								
5	(MSB)							
6								
...	PARAMETER LIST LENGTH							
9	(LSB)							
10	Reserved							
11	CONTROL							

The OPERATION CODE, SERVICE ACTION, and PARAMETER LIST LENGTH fields are described in SPC-5.

The CONTROL field is described in SAM-6.

The device server shall retain the attributes sent with a SET MEDIUM ATTRIBUTE command when no volume is present in the device until:

- a) a SET MEDIUM ATTRIBUTE command is processed that changes the attribute; or
- b) a logical unit reset condition occurs.

Attributes established when no volume is present shall be applied to the next medium loaded.

All medium attributes set by the SET MEDIUM ATTRIBUTE command shall be cleared by the device server when the volume is removed from the device.

5.4.2 SET MEDIUM ATTRIBUTE parameter list format

The parameter list shall have the format shown in table 14. Medium attributes shall be listed in ascending numerical order based on the ATTRIBUTE IDENTIFIER field (see 5.4.3).

Table 14 — SET MEDIUM ATTRIBUTE parameter list format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
...	PARAMETER DATA LENGTH (n-3)							
3	(LSB)							
	Medium attribute list							
4	Medium attribute [first] (see 5.4.3)							
	⋮							
	Medium attribute [last] (see 5.4.3)							
n								

The PARAMETER DATA LENGTH field should contain the number of bytes of attribute data.

The format of the medium attributes is described in 5.4.3.

No medium attributes shall be changed and the SET MEDIUM ATTRIBUTE command shall be terminated with CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST, if the parameter data contains any of the following:

- a) a medium attribute with an attribute length that exceeds the value shown in table 16;
- b) a medium attribute with an unsupported or reserved FORMAT field (see 5.4.3) value;
- c) a medium attribute with unsupported ATTRIBUTE VALUE field (see 5.4.3) value and a non-zero ATTRIBUTE LENGTH field value; or
- d) a medium attribute with a value in the FORMAT field that does not match the value shown table 16.

If the SET MEDIUM ATTRIBUTE command parameter data contains a medium attribute with an ATTRIBUTE LENGTH field set to zero, then one of the following actions shall occur:

- a) If the medium attribute is supported, the medium attribute’s value shall be cleared; or
- b) If the medium attribute is not supported, the medium attribute shall be ignored and this shall not be considered an error.

5.4.3 SET MEDIUM ATTRIBUTE attribute format

The medium attribute format is shown in table 15.

Table 15 — SET MEDIUM ATTRIBUTE attribute format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	ATTRIBUTE IDENTIFIER						_____ (LSB)	
2	Reserved				FORMAT			
3	Reserved							
4	(MSB) _____							
5	ATTRIBUTE LENGTH (n-5)						_____ (LSB)	
6	_____							
n	ATTRIBUTE VALUE _____							

The ATTRIBUTE IDENTIFIER field (see table 16) specifies the medium attribute to be set.

Table 16 — ATTRIBUTE IDENTIFIER field

Code	Description	Format	Maximum length (bytes)
0000h	Volume identifier (see SMC-3)	ASCII	32
0001h to FF7Fh	Reserved		
FF80h to FFFFh	Vendor specific		

The FORMAT field (see table 17) specifies the format of the data in the ATTRIBUTE VALUE field.

Table 17 — FORMAT field

Code	Name	Description
00b	BINARY	The ATTRIBUTE VALUE field contains binary data.
01b	ASCII	The ATTRIBUTE VALUE field contains left-aligned ASCII data.
10b to 11b		Reserved

The ATTRIBUTE LENGTH field specifies the length in bytes of the ATTRIBUTE VALUE field.

The ATTRIBUTE VALUE field contains the value of the medium attribute.

5.5 SET TAPE STREAM MIRRORING command

The SET TAPE STREAM MIRRORING command (see table 18) specifies tape stream mirroring control parameters (see 5.5.1).

Table 18 — SET TAPE STREAM MIRRORING command

Bit Byte	7	6	5	4	3	2	1	0
0	OPERATION CODE (83h)							
1	Reserved			SERVICE ACTION (16h)				
2	Reserved							
...								
7								
8	(MSB)	PARAMETER LIST LENGTH						(LSB)
9								
10	Reserved							
11	CONTROL							

See SPC-5 for the definition of the OPERATION CODE field and the SERVICE ACTION field. The OPERATION CODE field and the SERVICE ACTION field shall be set to the values shown in table 18.

The PARAMETER LIST LENGTH field is described in SSC-5

The CONTROL field is defined in SAM-6.

5.5.1 Tape stream mirroring control parameters

The tape stream mirroring control parameters format is shown in table 19.

Table 19 — Tape stream mirroring control parameters

Bit Byte	7	6	5	4	3	2	1	0	
0	(MSB)	TAPE STREAM MIRRORING CONTROL PARAMETERS LENGTH (n-2)							
1									(LSB)
2	Reserved						ATSM	CTSM	
3	Reserved								
...									
7									
Tape stream mirroring descriptor list									
8	(MSB)	Tape stream mirroring descriptor [first] (see SSC-5)							(LSB)
	⋮								
	(MSB)	Tape stream mirroring descriptor [last] (see SSC-5)							(LSB)
n									(LSB)

See SSC-5 for the definition of the TAPE STREAM MIRRORING CONTROL PARAMETERS LENGTH field, the ATSM bit, and the tape stream mirroring descriptor list.

The configure tape stream mirroring (CTSM) bit set to one specifies that the device entity (see SSC-5) shall be configured to be capable of performing a tape stream mirroring copy operation. If the CTSM bit is set to zero, then the device entity shall be configured to be not capable of performing a tape stream mirroring copy operation.

If the allow tape stream mirroring (ATSM) bit (see SSC-5) is set to one and the CTSM bit is set to zero, then the ADC device server shall terminate the SET TAPE STREAM MIRRORING command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The tape stream mirroring descriptor format is defined in SSC-5.

5.6 REPORT AUTOMATION DEVICE ATTRIBUTES command

The REPORT AUTOMATION DEVICE ATTRIBUTES command (see table 20) requests the device server to send the automation device attributes parameter list (see 5.3.2) to the application client.

Table 20 — REPORT AUTOMATION DEVICE ATTRIBUTES command

Bit Byte	7	6	5	4	3	2	1	0
0	OPERATION CODE (A3h)							
1	Reserved			SERVICE ACTION (1Eh)				
2	Reserved							
...								
5								
6	(MSB)							
...	ALLOCATION LENGTH							
9								
10	Reserved							
11	CONTROL							

The OPERATION CODE, SERVICE ACTION, and ALLOCATION LENGTH fields are described in SPC-5.

The CONTROL field is described in SAM-6.

The parameter list returned in response to a REPORT AUTOMATION DEVICE ATTRIBUTES command shall have the format shown in table 10.

6 Parameters for automation/drive interface devices

6.1 Ethernet parameters

6.1.1 Ethernet parameters overview

This sub-clause describes the parameters related to Ethernet usage on the DT device primary port(s).

6.1.2 IPv4 address

The IPv4 address format is defined in table 21.

Table 21 — IPv4 address format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
...	IP ADDRESS							
3								
4	(MSB)							
...	SUBNET MASK							
7								
8	(MSB)							
...	GATEWAY							
11								
12	Reserved							
...								
35								

The IP ADDRESS field specifies the IPv4 address (see RFC 791) used by the DT device primary port.

The SUBNET MASK field specifies the subnet mask (see RFC 4632), expressed in 32-bit binary format, used by the DT device primary port.

The GATEWAY field specifies the default gateway (see RFC 1122), expressed in 32-bit binary format, used by the DT device primary port.

6.1.3 IPv6 address

The IPv6 address format is defined in table 22.

Table 22 — IPv6 address format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
...	IP ADDRESS							
15	(LSB)							
16	PREFIX SIZE							
17	Reserved							
...								
19								
20	(MSB)							
...	DEFAULT ROUTER							
35	(LSB)							

The IP ADDRESS field specifies the IPv6 address (see RFC 2460) used by the DT device primary port expressed in 16-byte binary format.

The PREFIX SIZE field specifies the size in bits of the prefix (see RFC 4861).

The DEFAULT ROUTER field specifies the default router (see RFC 4861) IP address in 16-byte binary format.

6.1.4 TCP port

The format of the TCP port protocol specific data is defined in table 23.

Table 23 — TCP port protocol specific data

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	TCP PORT NUMBER							
	(LSB)							

The TCP PORT NUMBER field specifies the port number of the TCP port (see RFC 793).

6.1.5 UDP port

The format of the UDP port protocol specific data is defined in table 24.

Table 24 — UDP port protocol specific data

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	UDP PORT NUMBER							
	(LSB)							

The UDP PORT NUMBER field specifies the port number of the UDP port (see RFC 768).

6.2 Log parameters

6.2.1 Log parameters overview

This subclause defines the log pages and log parameters for ADC device servers.

The log page codes for ADC device servers are defined in table 25.

Table 25 — Log page codes (part 1 of 2)

Log page name	Page code	Subpage code	Support requirement	Reference
Application Client	0Fh	00h	Optional	SPC-5
Buffer Over-Run/Under-Run	01h	00h	Optional	SPC-5
Device Statistics	14h	00h	Optional	SSC-5
DT Device Status	11h	00h	Mandatory	6.2.2
Format Status	08h	00h	Optional	SPC-5
Informational Exceptions	2Fh	00h	Optional	SPC-5
Last <i>n</i> Deferred Errors or Asynchronous Events	0Bh	00h	Optional	SPC-5
Last <i>n</i> Error Events	07h	00h	Optional	SPC-5
Non-Medium Error	06h	00h	Optional	SPC-5
Power Condition Transitions	1Ah	00	Optional	SPC-5
Protocol Specific Port	18h	00h	Optional	SPC-5
Read Error Counter	03h	00h	Optional	SPC-5
Read Reverse Error Counter	04h	00h	Optional	SPC-5
Requested Recovery	13h	00h	Mandatory	6.2.4
Self-Test Results	10h	00h	Optional	SPC-5
Sequential-Access Device	0Ch	00h	Optional	SSC-5

^a Mandatory for a page code if any subpage for the page code is supported.
^b Mandatory if the TDDEC bit in the VHF data descriptor is supported.
^c The following combinations of page codes and subpage codes are vendor specific: 30h to 3Eh/00h to FEh.

Table 25 — Log page codes (part 2 of 2)

Log page name	Page code	Subpage code	Support requirement	Reference
Service Buffers Information	15h	00h	Optional	6.2.5
Start-Stop Cycle Counter	0Eh	00h	Optional	SPC-5
Supported Log Pages	00h	00h	Mandatory	SPC-5
Supported Log Pages and Subpages	00h	FFh	Optional ^a	SPC-5
Supported Subpages	01h to 3Fh	FFh	Optional ^a	SPC-5
Tape Diagnostic Data	16h	00h	Optional ^b	SSC-5
TapeAlert Response	12h	00h	Mandatory	6.2.2.9
Temperature	0Dh	00h	Optional	SPC-5
Verify Error Counter	05h	00h	Optional	SPC-5
Write Error Counter	02h	00h	Optional	SPC-5
Reserved	09h to 0Ah	00h to FEh		
	17h	00h		
	19h	00 to FEh		
	1Bh to 2Eh	00h to FEh		
	3Fh	00h to FEh		
Vendor specific ^c				
Reserved	All other codes			
^a Mandatory for a page code if any subpage for the page code is supported. ^b Mandatory if the TDDEC bit in the VHF data descriptor is supported. ^c The following combinations of page codes and subpage codes are vendor specific: 30h to 3Eh/00h to FEh.				

Changes to log parameters caused by LOG SELECT commands or other DT device operations of an RMC device server shall not be reflected by changes in the corresponding parameters reported by the ADC device server (i.e., log parameters of ADC and RMC device servers in the same DT device are independent). Changes in log param-

eters caused by LOG SELECT commands or other DT device operations of an ADC device server shall not be reflected by changes in the corresponding parameters reported by the RMC device server.

6.2.2 DT Device Status log page

6.2.2.1 DT Device Status log page overview

The DT Device Status log page (see table 26) defines log information pertaining to the DT device and DT device primary ports.

Table 26 — DT Device Status log page

Bit Byte	7	6	5	4	3	2	1	0
0	DS	SPF (0)	PAGE CODE (11h)					
1	SUBPAGE CODE (00h)							
2	(MSB)	PAGE LENGTH (n-3)						
3								(LSB)
4	DT Device Status log parameters							
n								

See SPC-5 for the description of the DS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field.

Table 27 defines the DT Device Status log page parameter codes.

Table 27 — DT Device Status log page parameter codes

Parameter code	Description	Reference
0000h	Very high frequency data	6.2.2.2
0001h	Very high frequency polling delay	6.2.2.3
0002h	DT device ADC data encryption control status	6.2.2.4
0003h	Key management error data	6.2.2.5
0004h	Extended very high frequency data	6.2.2.6
0005h to 00FFh	Reserved	
0100h	Obsolete	
0101h to 01FFh	DT device primary port status	6.2.2.7
0200h	Potential conflict list entries count	6.2.2.8
0201h to 02FFh	Potential conflict list	6.2.2.9
0300h	Reserved	6.2.2.10
0301h to 03FFh	DT device primary port physical interface Information	
0400h to 0FFFh	Reserved	
1000h to 1FFFh	DT device primary port IP addresses	6.2.2.11
2000h to 7FFFh	Reserved	
8000h to FFFFh	Vendor-specific	

6.2.2.2 Very high frequency data log parameter

The very high frequency data log parameter format is shown in table 28.

Table 28 — Very high frequency data log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	PARAMETER CODE (0000h) _____ (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING		
3	PARAMETER LENGTH (04h)							
4	_____							
...	VHF data descriptor _____							
7	_____							

The PARAMETER CODE field shall be set to 0000h to indicate the very high frequency data log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field shall be set to 04h.

The VHF data descriptor is defined in table 29.

Table 29 — VHF data descriptor

Bit Byte	7	6	5	4	3	2	1	0
0	PAMR	HIU	MACC	CMPR	WRTP	CRQST	CRQRD	DINIT
1	INXTN	Reserved	RAA	MPRSNT	Reserved	MSTD	MTHRD	MOUNTED
2	DT DEVICE ACTIVITY							
3	VS	Reserved	TDDEC	EPP	ESR	RRQST	INTFC	TAFC

The prevent/allow medium removal (PAMR) bit shall be set to one when removal of the volume in the DT device is prevented as the result of the RMC device server processing a PREVENT ALLOW MEDIUM REMOVAL command (see SPC-5 or the relevant command standard). The PAMR bit shall be set to zero when removal of the volume in the DT device is allowed as defined by the PREVENT ALLOW MEDIUM REMOVAL command.

The host initiated unload (HIU) bit shall be set to one when the ADC device server detects any one of the unload statuses (e) - (h) (see table 5) due to the RMC device server receiving a LOAD UNLOAD command (see SSC-5) with the LOAD bit set to zero. The HIU bit shall be set to zero when the ADC device server detects any status in table 3 or table 5 other than unload statuses (e) - (h) in table 5. The HIU bit may be set to zero following a logical unit reset of the RMC or ADC device servers.

A medium auxiliary memory accessible (MACC) bit set to one indicates that the volume is located at a position where the MAM (see SPC-5) is accessible. A MACC bit set to zero indicates that the MAM is not accessible. If the

MACC bit is set to one, then the ADC device server shall also support commands to access the MAM. If the MACC bit is supported, then the MACC bit should only be set to one if the MPRSNT bit is set to one. The MACC bit is only applicable for DT devices and media that support MAM.

A compress (CMPR) bit set to one indicates that the DT device has data compression enabled. A CMPR bit set to zero indicates that compression is not enabled.

A write protect (WRTP) bit set to one indicates that the current volume, if any, is physically write protected. A WRTP bit set to zero indicates that the current volume, if any, is not physically write protected. The WRTP bit is only valid if the MPRSNT bit is set to one. The WRTP bit should be set to zero if the MPRSNT bit is set to zero.

Physically write protected refers to any mechanism used within the physical carrier to write protect the volume (e.g., sliding windows or tabs) and not logical states of write protection caused by commands to the DT device.

A cleaning requested (CRQST) bit set to one indicates that the DT device has requested cleaning. A CRQST bit set to zero indicates that no cleaning is requested.

A cleaning required (CRQRD) bit set to one indicates that normal operation is not possible until a head cleaning operation is performed. A CRQRD bit set to zero indicates that normal operation may be possible without a head cleaning operation. It shall not be considered an error for the CRQRD bit and the CRQST bit to both be set to one.

A DT device initialized (DINIT) bit set to one indicates that the DT device is able to return valid very high frequency data. A DINIT bit set to zero indicates DT device initialization is required or incomplete and the values of other bits in the very high frequency data log parameter are indeterminate.

The in transition (INXTN) bit set to one indicates that the in transition attribute of the device entity (see SSC-5) is set to TRUE. The INXTN bit set to zero indicates that the in transition attribute of the device entity is set to FALSE.

The robotic access allowed (RAA) bit set to one indicates that the robotic access allowed attribute of the device entity (see SSC-5) is set to TRUE. The RAA bit set to zero indicates that the robotic access allowed attribute of the device entity is set to FALSE.

The RAA bit does not reflect the value of any PREVENT ALLOW MEDIUM REMOVAL command settings (see SSC-5), nor the ability of the automation device to issue commands to the DT device.

The medium present (MPRSNT) bit set to one indicates that the volume present attribute of the device entity (see SSC-5) is set to TRUE. A MPRSNT bit set to zero indicates the volume present attribute of the device entity is set to FALSE.

The medium seated (MSTD) bit set to one indicates that the volume seated attribute of the device entity (see SSC-5) is set to TRUE. A MSTD bit set to zero indicates that the volume seated attribute of the device entity is set to FALSE.

The medium threaded (MTHRD) bit set to one indicates that the medium threaded attribute of the device entity (see SSC-5) is set to TRUE. The MTHRD bit set to zero indicates that the medium threaded attribute of the device entity is set to FALSE.

The value of the MTHRD bit may or may not correspond to the DT device responding with GOOD status to a TEST UNIT READY command (see SPC-5), as additional processing may be required by the DT device after threading before the logical unit becomes ready.

The MOUNTED bit to one indicates that the volume mounted attribute of the device entity (see SSC-5) is set to TRUE. The MOUNTED bit set to zero indicates that the volume mounted attribute of the device entity is set to FALSE.

The DT DEVICE ACTIVITY field is used to describe the current activity of the DT device (see table 30).

Table 30 — DT DEVICE ACTIVITY field

Code	Description ^a
00h	No DT device activity
01h	Cleaning operation in progress
02h	Volume is being loaded
03h	Volume is being unloaded
04h	Other medium activity
05h	Reading from medium
06h	Writing to medium
07h	Locating medium
08h	Rewinding medium
09h	Erasing volume
0Ah	Formatting volume
0Bh	Calibrating
0Ch	Other DT device activity
0Dh	Microcode update in progress
0Eh	Reading encrypted from medium
0Fh	Writing encrypted to medium
10h	Diagnostic operation in progress
10h to 7Fh	Reserved
80h to FFh	Vendor-specific DT device activity
^a The conditions that cause a DT device server to set a specific DT DEVICE ACTIVITY code are vendor-specific and may represent actual instantaneous activity or a conceptual representation of activity.	

A tape diagnostic data entry created (TDDEC) bit set to one indicates that the DT device has created a new Tape Diagnostic Data log page entry (see SSC-5) since the last retrieval of any of the parameters from the Tape Diagnostic Data log page by this I_T nexus. A TDDEC bit set to zero indicates that the DT device has not created a new Tape Diagnostic Data log page entry since the last retrieval of any of the parameters from the Tape Diagnostic Data log page by this I_T nexus.

An encryption parameters present (EPP) bit set to one indicates that the DT device has a set of saved logical block encryption parameters with either the ENCRYPTION MODE field set to a value other than DISABLE (see SSC-5) or the DECRYPTION MODE field set to a value other than DISABLE (see SSC-5) associated with any I_T nexus or a DT device management interface. An EPP bit set to zero indicates that the DT device does not have a set of saved logical block encryption parameters with either the ENCRYPTION MODE field set to a value other than DISABLE or the

DECRYPTION MODE field set to a value other than DISABLE associated with any I_T nexus or a DT device management interface.

An encryption service request (ESR) bit set to one indicates that:

- a) at least one bit in the SERVICE REQUEST INDICATORS field in the DT device ADC data encryption control status log parameter has been set to one since the last retrieval of the DT device ADC data encryption control status log parameter (see 6.2.2.4) by this I_T nexus; and
- b) at least one bit in the SERVICE REQUEST INDICATORS field in the DT device ADC data encryption control status log parameter is set to one.

The ADC device server sets the ESR bit to zero after retrieval of the DT device ADC data encryption control status log parameter by this I_T nexus. An ESR bit set to zero indicates:

- a) that no bits in the SERVICE REQUEST INDICATORS field in the DT device ADC data encryption control status log parameters have been set to one since the last retrieval of the DT device ADC data encryption control status log parameter by this I_T nexus; or
- b) that all of the bits in the SERVICE REQUEST INDICATORS field in the DT device ADC data encryption control status log parameter are set to zero.

The recovery requested (RRQST) bit shall be set to one to indicate that the DT device has detected an error and that one or more requested recovery procedures are available via the Requested Recovery log page (see 6.2.4). The Requested Recovery log page may indicate that a recovery procedure is not requested or not defined. A RRQST bit set to zero indicates that no recovery procedure is requested. The RRQST bit shall remain set to one as long as a recovery procedure is available. When the RRQST bit is set to one, the INXTN bit shall be set to zero.

An interface changed (INTFC) bit set to one indicates that one or more fields in the DT device primary port status log parameters (see 6.2.2.7) have changed since the last retrieval of any of the DT device primary port status log parameters from the DT Device Status log page by this I_T nexus. If one or more fields in the DT device primary port status log parameters have changed since a primary port has been enabled, then the device server may set the INTFC bit to one before any of the DT device primary port status log parameters have been retrieved from the DT Device Status log page by this I_T nexus. An INTFC bit set to zero indicates that no fields in the DT device primary port status log parameters have changed since the last retrieval of any of the DT device primary port status log parameters by this I_T nexus. An INTFC bit set to zero may indicate that none of the DT device primary port status log parameters from the DT Device Status log page have been retrieved by this I_T nexus since the last hard reset condition.

A TapeAlert state flag changed (TAFC) bit set to one indicates that at least one TapeAlert state flag has changed from its previous value since the last retrieval of the TapeAlert Response log page (see 6.2.3) by this I_T nexus. The ADC device server sets the TAFC bit to zero after retrieval of the TapeAlert Response log page by this I_T nexus. A TAFC bit set to zero indicates that no TapeAlert state flag has changed. There may not be any difference in the TapeAlert state flags upon retrieval if the state changed again between the time of reporting through the TAFC bit and of retrieving the TapeAlert Response log page. This should not be considered an error. Pending TapeAlert state flags may affect the reliability of the values returned in other bits within the VHF data descriptor.

6.2.2.3 Very high frequency polling delay log parameter

The very high frequency polling delay log parameter format is shown in table 31.

Table 31 — Very high frequency polling delay log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	PARAMETER CODE (0001h) _____ (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING		
3	PARAMETER LENGTH (02h)							
4	(MSB) _____							
5	VHF POLLING DELAY _____ (LSB)							

The PARAMETER CODE field shall be set to 0001h to indicate the very high frequency polling delay log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field shall be set to 02h to allow transfer of the complete parameter.

The VHF POLLING DELAY field indicates the minimum delay in milliseconds the automation application client should wait before requesting the DT Device Status log page again.

6.2.2.4 DT device ADC data encryption control status log parameter

The DT device ADC data encryption status log parameter format is shown in table 32.

Table 32 — DT device ADC data encryption control status log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PARAMETER CODE (0002h) (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING		
3	PARAMETER LENGTH (08h)							
4	SERVICE REQUEST INDICATORS							
5								
6	(MSB)							
...	PARAMETERS REQUEST SEQUENCE IDENTIFIER							
9	(LSB)							
10	Reserved							
11								

The PARAMETER CODE field shall be set to 0002h to indicate the DT device ADC data encryption control status log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field shall be set to 08h.

The SERVICE REQUEST INDICATORS field is shown in table 33.

Table 33 — SERVICE REQUEST INDICATORS field

Bit Byte	7	6	5	4	3	2	1	0
0	Reserved							
1	EPR	DPR	KME	ABT	Reserved			

An encryption parameters request (EPR) bit set to one indicates that the ADC device server requests a set of logical block encryption parameters for encryption from the automation application client. The ADC device server shall set the EPR bit to one when the DT device indicates a set of logical block encryption parameters for encryption is required (e.g., the DT device includes an SSC-5 compliant device server and has the logical block encryption parameters for encryption request indicator set to TRUE, see SSC-5). If the EPR bit is set to one, then the automation application client should abort any logical block encryption parameters request (see 4.10.4.2) in progress with a logical block encryption parameters request identifier that is different from the value specified in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field. If the EPR bit is set to one, then the abort (ABT) bit shall be set to zero.

An EPR bit set to zero indicates that the ADC device server does not request a set of logical block encryption parameters for encryption from the automation application client. The ADC device server shall set the EPR bit to zero and shall set the logical block encryption parameters for encryption request indicator in the DT device to FALSE when:

- a) it successfully processes a SECURITY PROTOCOL OUT command, with the SECURITY PROTOCOL field set to Tape Data Encryption and with the clear encryption parameters request (CEPR) bit in a Data Encryption Parameters Complete page set to one;
- b) it successfully processes a SECURITY PROTOCOL OUT command, with the SECURITY PROTOCOL field set to Tape Data Encryption and with the AUTOMATION COMPLETE RESULTS field in a Data Encryption Parameters Complete page set to a nonzero value; or
- c) the logical block encryption parameters for encryption indicator in the DT device is set to FALSE (e.g., the DT Device includes an SSC-5 compliant device server and has set the logical block encryption parameters for encryption indicator to FALSE after a logical block encryption parameters timer has expired).

A decryption parameters request (DPR) bit set to one indicates that the ADC device server requests a set of encryption parameters for decryption from the automation application client. The ADC device server shall set the DPR bit to one when the DT device indicates a set of logical block encryption parameters for decryption is required (e.g., the DT device includes an SSC-5 compliant device server and has the logical block encryption parameters for encryption request indicator set to TRUE, see SSC-5). If the DPR bit is set to one, then the automation application client should abort any logical block encryption parameters request in progress with a logical block encryption parameters request sequence identifier that is different from the value specified in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field. If the DPR bit is set to one, then the ABT bit shall be set to zero.

A DPR bit set to zero indicates that the ADC device server does not request a set of logical block encryption parameters for decryption from the automation application client. The ADC device server shall set the DPR bit to zero and shall set the logical block encryption parameters for decryption request indicator in the DT device to FALSE if:

- a) it successfully processes a SECURITY PROTOCOL OUT command, with the SECURITY PROTOCOL field set to Tape Data Encryption and with the clear decryption parameters request (CDPR) bit in a Data Encryption Parameters Complete page set to one;
- b) it successfully processes a SECURITY PROTOCOL OUT command, with the SECURITY PROTOCOL field set to Tape Data Encryption and with the AUTOMATION COMPLETE RESULTS field in a Data Encryption Parameters Complete page set to a nonzero value; or
- c) the logical block encryption parameters for decryption indicator in the DT device is set to FALSE (e.g., the DT Device includes an SSC-5 compliant device server and has set the logical block encryption parameters for decryption indicator to FALSE after a logical block encryption parameters timer has expired).

A key management error (KME) bit set to one indicates that the ERROR TYPE field in the key management error data log parameter (see 6.2.2.5) is set to a non-zero value. If the KME bit is set to one, then the ABT bit shall be set to zero.

The ADC device server shall set the KME bit to zero when the ERROR TYPE field in the key management error data log parameter is set to zero.

If the encryption parameters request (EPR) bit is set to one or if the decryption parameters request (DPR) bit is set to one, and if the the KME bit is set to one, then the automation application client should process the key management error before processing the encryption parameters request.

The ADC device server shall set the abort (ABT) bit to one when the DT device notifies the ADC device server that the logical block encryption parameters request associated with the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field has been aborted.

If the ABT bit is set to one, then the automation application client should abort processing the logical block encryption parameters request associated with the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field. An ABT bit set to one shall not affect the current set of logical block encryption parameters. If the ABT bit is set to one, then:

- a) the encryption parameters request (EPR) bit shall be set to zero;
- b) the decryption parameters request (DPR) bit shall be set to zero; and
- c) the key management error (KME) bit shall be set to zero.

The ADC device server shall set the ABT bit to zero upon successful completion of a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Data Encryption Parameters Complete page with the clear abort (CABT) bit set to one.

The automation application client may support aborting processing of logical block encryption parameters requests. If the ABT bit is set to one and the automation application client supports aborting processing of logical block encryption parameters requests, then the automation application client shall send a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Data Encryption Parameters Complete page with a logical block encryption parameters request sequence identifier that matches the sequence identifier value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field and the CABT bit set to one when:

- a) the automation application client processes the abort event and aborts processing the logical block encryption parameters request with the logical block encryption parameters request sequence identifier that matches the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field; or
- b) the automation application client attempts to process the abort event and there is no matching logical block encryption parameters request sequence identifier (e.g., the automation application client completed processing the logical block encryption parameters request before starting to process the abort event).

If the ABT bit is set to one and the automation application client does not process the logical block encryption parameters abort event, then the ABT bit remains set until:

- a) the next logical block encryption parameters request (see 4.10.4.2); or
- b) a hard reset condition.

The PARAMETERS REQUEST SEQUENCE IDENTIFIER field shall contain the logical block encryption parameters request sequence identifier:

- a) for the logical block encryption parameters for encryption request if the encryption parameters request (EPR) bit is set to one;
- b) for the logical block encryption parameters for decryption request if the decryption parameters request (DPR) bit is set to one; or
- c) for the logical block encryption parameters request that has been aborted by the ADC device server if the abort (ABT) bit is set to one.

The logical block encryption parameters request sequence identifier shall be a value assigned by the ADC device server that uniquely identifies the logical block encryption parameters request.

The PARAMETERS REQUEST SEQUENCE IDENTIFIER field shall be ignored if:

- a) the key management error (KME) bit is set to one;
- b) the encryption parameters request (EPR) bit is set to zero;
- c) the decryption parameters request (DPR) bit is set to zero; and
- d) the abort (ABT) bit is set to zero.

The DT device ADC data encryption control status log parameter shall not be changed with the use of a LOG SELECT command.

6.2.2.5 Key management error data log parameter

If the key management error (KME) bit is set to one in the DT device ADC data encryption control status log parameter (see 6.2.2.4), then the key management error data log parameter shall contain valid information pertaining to the error that caused the KME bit to be set to one. The key management error log parameter format is shown in table 34.

Table 34 — Key management error data log parameter

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PARAMETER CODE (0003h)							(LSB)
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
3	PARAMETER LENGTH (0Ch)							
4	ERROR TYPE				KTO	Reserved		
5	Reserved							
6	(MSB)							
...	PARAMETERS REQUEST ERROR SEQUENCE IDENTIFIER							(LSB)
9								
10	Reserved				SENSE KEY			
11	ADDITIONAL SENSE CODE							
12	ADDITIONAL SENSE CODE QUALIFIER							
13								
...	Reserved							
15								

The PARAMETER CODE field shall be set to 0003h to indicate the key management error data log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field shall be set to 0Ch.

The ERROR TYPE field indicates the type of the last key management error event (see 4.10.4.5). The error types defined for the ERROR TYPE field are shown in table 35.

Table 35 — ERROR TYPE field

Code	Description
0000b	No error
0001b	encryption parameters request error
0010b	decryption parameters request error
0011b to 1011b	Reserved
1100b to 1111b	Vendor specific

The ADC device server shall set the ERROR TYPE field to zero following successful completion of:

- a) an unload operation;
- b) a SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol and the Configure Encryption Policy page;
- c) a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Data Encryption parameters complete page with the clear key management error (CKME) bit set to one; or
- d) a hard reset condition (see SAM-6).

The key timeout (KTO) bit set to one indicates that the logical block encryption period timer expired indicator in the DT device is set to TRUE. The KTO bit set to zero indicates that the encryption parameters period expired indicator in the DT device is set to FALSE. The KTO bit shall be set to zero:

- e) if the event that caused the key management error (KME) bit to be set to one in the DT device ADC data encryption control status log parameter was not caused by an encryption parameters period expired indicator in the DT device; or
- f) upon successfully processing a SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol and the Data Encryption Parameters Complete page with the clear key management error (CKME) bit set to one.

The PARAMETERS REQUEST ERROR SEQUENCE IDENTIFIER field shall contain the logical block encryption parameters request sequence identifier assigned by the ADC device server that uniquely identifies the logical block encryption parameters request associated with the last key management error event.

See SPC-5 for descriptions of the SENSE KEY field, ADDITIONAL SENSE CODE field, and ADDITIONAL SENSE CODE QUALIFIER field. The SENSE KEY field, ADDITIONAL SENSE CODE field, and ADDITIONAL SENSE CODE QUALIFIER field shall contain the sense data for the most recent event that caused the KME bit to be set to one in the DT device ADC data encryption control status log parameter.

The key management error data log parameter data shall not be changed with the use of a LOG SELECT command.

If the ERROR TYPE field is set to zero, then the SENSE KEY field, ADDITIONAL SENSE CODE field, and ADDITIONAL SENSE CODE QUALIFIER field are undefined.

6.2.2.6 Extended very high frequency data log parameter

The extended very high frequency data log parameter format is shown in table 36. This should be used instead of the very high frequency data log parameter (see table 28).

Table 36 — Extended very high frequency data log parameter format

Bit Byte	7	6	5	4	3	2	1	0								
0	(MSB) _____															
1	PARAMETER CODE (0004h)						_____ (LSB)									
2	Parameter list control byte - binary format list log parameter															
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING										
3	PARAMETER LENGTH (04h)															
4	_____															
...									VHF DATA DESCRIPTOR							
7									_____							
8	Reserved					OVERWRITE	PCL_P									
9	Vendor-specific															
10	Reserved															
11	_____															

The PARAMETER CODE field shall be set to 0004h to indicate the extended very high frequency data log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field is set to the number of bytes that follow. The value in this field should be used to determine the number of bytes following as new fields get added after the last byte in this parameter.

The VHF data descriptor is defined in 6.2.2.2.

The OVERWRITE bit is set to one if an overwrite (see SSC-5) occurs and the write mode is not set to append-only mode (see SSC-5). The OVERWRITE bit is set to zero if:

- a) a hard reset condition occurs; or
- b) a volume is inserted (i.e., MPRSNT (medium present) of the VHF parameter data transitions from 0b to 1b).

The potential conflict list present (PCL_P) bit is set as specified in 4.12.

6.2.2.7 DT device primary port status log parameter(s)

6.2.2.7.1 DT device primary port status log parameter(s) overview

The DT device primary port status log parameter(s) format is shown in table 37..

Table 37 — DT device primary port status log parameter(s) format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PARAMETER CODE (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
3	PARAMETER LENGTH (n-3)							
4	DT device primary port status data							
n								

The PARAMETER CODE field shall be set to the value of the primary port index for the port (see 4.8.1) plus 0100h.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field contains the length in bytes of DT device primary port status data that follows.

The DT device primary port status data is determined by the protocol of the port with which the parameter is associated. The protocol associated with each port is reported in the PROTOCOL IDENTIFIER field in the DT Device Primary Port mode subpage (see 6.3.2.1) by primary port index value. The format of the DT device primary port status data for each protocol type is shown in table 38.

Table 38 — Port status data format by protocol identifier

Code	Description	Reference
0h	Fibre Channel	6.2.2.7.2
1h	Parallel SCSI	6.2.2.7.3
2h to 4h	Reserved	
5h	Internet SCSI (iSCSI)	6.2.2.7.4
6h	SAS Serial SCSI Protocol	6.2.2.7.5
7h to Fh	Reserved	

6.2.2.7.2 Fibre Channel port status data

The format of the DT device primary port status data for a Fibre Channel port is shown in table 39.

Table 39 — Fibre Channel port status data format

Bit Byte	7	6	5	4	3	2	1	0
0	CURRTOP	CURRENT SPEED			LC	CONFLICT	SIGNAL	PIC
1	(MSB)	CURRENT N_PORT_ID						
...								
3								
4	ECSV	Reserved						
5	Reserved				EXTENDED CURRENT SPEED			
6	Reserved							
7	Reserved	CURRENT FC-AL LOOP ID						
8	CURRENT PORT NAME							
...								
15								
16	CURRENT NODE NAME							
...								
23								

A current topology (CURRTOP) bit set to one indicates that the DT device primary port is operating in OLD-PORT state (i.e., is configured as an N_Port). A CURRTOP bit set to zero indicates that the DT device primary port is operating in arbitrated loop mode. The CURRTOP bit shall be ignored when the PIC bit is set to zero.

The CURRENT SPEED field indicates the bit rate at which the DT device primary port is currently operating. Table 68 defines the valid values for the CURRENT SPEED field. The CURRENT SPEED field shall be ignored when the PIC bit is set to zero.

A login complete (LC) bit set to one indicates that at least one initiator port has completed Process Login (see FCP-5) with the DT device on the DT device primary port. A LC bit set to zero indicates that a login has not successfully completed through the PRLI phase on the DT device primary port.

A CONFLICT bit set to one indicates that another device has the required Hard AL_PA (see FC-AL-2) or that no AL_PA is available for the DT device primary port. A CONFLICT bit set to zero indicates there is no AL_PA conflict.

A SIGNAL bit set to one indicates that a signal is detected at the DT device primary port (e.g., detection of light for an optical medium). A SIGNAL bit set to zero indicates a signal is not detected.

A port initialization complete (PIC) bit set to one indicates that the FC_Port state machine is in the ACTIVE state (see FC-FS-5), or the most recent Loop Initialization Process (LIP) has completed successfully (see FC-AL-2). A PIC bit set to zero indicates that the DT device primary port is not in the ACTIVE state (see FC-FS-5), or has not successfully completed the most recent LIP.

The CURRENT N_PORT_ID field indicates the 24-bit N_Port_ID (see FC-FS-5) that is assigned to the DT device primary port. The CURRENT N_PORT_ID field shall be ignored when the PIC bit is set to zero.

An extended current speed valid (ECSV) bit set to one indicates that the value in the EXTENDED CURRENT SPEED field is valid. An ECSV bit set to zero indicates that the value in the EXTENDED CURRENT SPEED field is not valid. If speed negotiation is not complete, then the ECSV bit shall be set to zero. If the ECSV bit is set to one, then the CURRENT SPEED field shall be ignored.

The EXTENDED CURRENT SPEED field indicates the bit rate at which the DT device primary port is currently operating. Table 69 defines the values for the EXTENDED CURRENT SPEED field.

The CURRENT FC-AL LOOP ID field indicates the loop identifier (see FC-AL-2) that is assigned to the DT device primary port. The CURRENT FC-AL LOOP ID field shall be ignored when the PIC bit is set to zero or when the CURRTOP bit is set to one.

The CURRENT PORT NAME field contains the DT device’s primary port name identifier (see FC-FS-5).

The CURRENT NODE NAME field contains the DT device’s primary node name identifier (see FC-FS-5).

6.2.2.7.3 SCSI parallel interface port status data

The format of the DT device primary port status data for a SCSI port that supports parallel transfers (see SPI-5) is shown in table 40.

Table 40 — SCSI parallel interface port status data format

Bit Byte	7	6	5	4	3	2	1	0
0	Reserved					CURRENT BUS MODE		Reserved
1	Reserved							
2	MOST RECENT TRANSFER PERIOD FACTOR							
3	CURRENT SCSI ADDRESS							

The CURRENT BUS MODE field indicates the bus mode in which the DT device primary port is operating (see SPI-5).

The MOST RECENT TRANSFER PERIOD FACTOR field indicates the transfer period factor that was negotiated most recently (see SPI-5).

The CURRENT SCSI ADDRESS field indicates the 8-bit address that is assigned to the DT device primary port.

6.2.2.7.4 iSCSI Ethernet port status data

The format of the DT device primary port status data for an iSCSI Ethernet port is shown in table 41. This log parameter describes an Ethernet physical port that is used for iSCSI. The DT device primary port IP addresses log parameter(s) (see 6.2.2.11.1) provides the status of an Ethernet physical port that is used for iSCSI.

Table 41 — iSCSI Ethernet port status data format

Bit Byte	7	6	5	4	3	2	1	0
0	DCBX_NEG	PAUSE METHOD			Reserved			PIC
1	Reserved				ETHERNET SPEED EXPONENT			
2	ETHERNET SPEED							
3	Reserved							
...								
5								
6	(MSB)	MAC ADDRESS						(LSB)
...								
11								

A DCBX negotiated (DCBX_NEG) bit set to one indicates that the DT device primary port has negotiated DCBX (see IEEE 802.1Qaz). A DCBX_NEG bit set to zero indicates that the DT device primary port has not negotiated DCBX.

The PAUSE METHOD field indicates the pause method in use (see table 42).

Table 42 — PAUSE METHOD field

Code	Description
000b	None / unknown
001b	Ethernet PAUSE (see IEEE 802.3x)
010b	Per Priority Pause (see IEEE 802.1Qbb)
all others	Reserved

A port initialization complete (PIC) bit set to one indicates that the port is link up (e.g., Auto-Negotiation is complete. See IEEE 802.3). A PIC bit set to zero indicates the port is link down (e.g., Auto-Negotiation is not complete).

The ETHERNET SPEED EXPONENT field and the ETHERNET SPEED field indicate the speed in bits per second at which the port is currently operating. The ETHERNET SPEED EXPONENT field defines the units of the ETHERNET SPEED field (i.e., a value of m in the ETHERNET SPEED field and a value of n in the ETHERNET SPEED EXPONENT field indicates a value of $m \times 10^n$). If the speed is unable to be expressed with the requisite precision, then the speed shall be rounded to the nearest even number that is able to be expressed (e.g., 425 Gb/s is expressed as 42×10^{10} which is the ETHERNET SPEED field set to 42 (i.e., 2Ah) and the ETHERNET SPEED EXPONENT field set to 10 (i.e., Ah)).

The media access control address (MAC ADDRESS) field contains the DT device’s primary port Ethernet interface identifier (see RFC 7042) in canonical form (see RFC 2469).

6.2.2.7.5 Serial Attached SCSI port status data

The format of the DT device primary port status data for a SAS port (see SPL-5) is shown in table 43.

Table 43 — Serial Attached SCSI port status data format

Bit Byte	7	6	5	4	3	2	1	0
0	NEGOTIATED PHYSICAL LINK RATE				Reserved		SIGNAL	PIC
1	(MSB)							
...	HASHED SAS ADDRESS							
3	(LSB)							
4	(MSB)							
...	SAS ADDRESS							
11	(LSB)							

The NEGOTIATED PHYSICAL LINK RATE field indicates the negotiated physical link rate (see SPL-5).

If the port supports the capability to detect signal at the DT device primary port (e.g., COMINIT detected, see SPL-5), then a SIGNAL bit set to one indicates that a signal is detected by at least one SAS phy (see SAS-4.1) that composes the SAS port. A SIGNAL bit set to zero indicates a signal is not detected by at least one SAS phy that composes the SAS port. If the port does not support the capability to detect signal at the DT device primary port, then the SIGNAL bit shall be set to the value of the PIC bit.

A port initialization complete (PIC) bit set to one indicates that the port has successfully completed the link reset sequence (see SPL-5) for at least one SAS phy that composes the SAS port. When port initialization is complete the SAS port is ready to accept connection requests.

The HASHED SAS ADDRESS field contains the hashed version of the SAS address (see SPL-5) of the SAS port assigned to the DT device primary port.

The SAS ADDRESS field contains the SAS address (see SPL-5) of the SAS port assigned to the DT device primary port.

6.2.2.8 Potential conflict list entries count log parameter

The potential conflict list entries count log parameter format is shown in table 44 .

Table 44 — Potential conflict list entries count log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PARAMETER CODE (0200h)							
	(LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
3	PARAMETER LENGTH (01h)							
4	NUMBER OF POTENTIAL CONFLICT LIST ENTRIES							

The PARAMETER CODE field shall be set to 0200h to indicate the potential conflict list entries count log parameter.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field is set to the number of bytes that follow. The PARAMETER LENGTH field shall be set to the value shown in table 44.

The NUMBER OF POTENTIAL CONFLICT LIST ENTRIES field indicates the number of potential conflict list log parameters and is updated as specified in 4.12.

6.2.2.9 Potential conflict list log parameter(s)

The potential conflict list log parameters shall contain potential conflict list entries as specified in 4.12. The potential conflict list log parameter format is shown in table 45 .

Table 45 — Potential conflict list log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	PARAMETER CODE _____ (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING		
3	PARAMETER LENGTH (n-3)							
4	COMMAND OPERATION CODE							
5	(MSB) _____							
6	COMMAND SERVICE ACTION _____ (LSB)							
7	(MSB) _____							
8	OWNER ITN COUNT _____ (LSB)							
9	(MSB) _____							
...	OWNER ITN TIME _____							
20	_____ (LSB)							
21	(MSB) _____							
22	RELATIVE TARGET PORT IDENTIFIER _____ (LSB)							
23	(MSB) _____							
n	TRANSPORT ID _____ (LSB)							

The PARAMETER CODE field shall be set to the potential conflict list entry number plus 0200h. The potential conflict list parameter code values shall be contiguous (i.e., the first entry in the list shall be 0201h, the second entry in the list shall be 0202h, etc.).

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field is set to the number of bytes that follow. The value in this field should be used to determine the number of bytes following as new fields get added after the last byte in this parameter.

The COMMAND OPERATION CODE field is set as specified in 4.12 and indicates the operation code of the command that caused this entry to be updated.

The COMMAND SERVICE ACTION field is set as specified in 4.12 and indicates the service action, if any, of the command that caused this entry to be updated.

The OWNER ITN COUNT field is set as specified in 4.12 and indicates the number of times the owner_ITN variable was set to a value that represents this I_T nexus (e.g., a potential conflict list command (see 4.12) was received through the I_T nexus represented by this log parameter when the owner_ITN variable was set to a value that represented a different I_T nexus). This field saturates at FFFFh and stops incrementing.

The OWNER ITN TIME field is set as specified in 4.12 and indicates the most recent time the owner_ITN variable was set to a value that represents this I_T nexus. The format of this field is the format of the REPORT TIMESTAMP parameter data (see SPC-5).

The RELATIVE TARGET PORT IDENTIFIER field specifies the relative target port identifier (see SPC-5) of the I_T nexus through which the command that caused this entry to be updated arrived.

The TRANSPORT ID field shall be set to a TransportID (see SPC-5) as specified in 4.12 and specifies the initiator port of the I_T nexus through which the command that caused this entry to be updated arrived.

6.2.2.10 DT device primary port physical interface information

The DT device primary port physical interface information log parameter(s) format is shown in table 46.

Table 46 — DT device primary port physical interface information format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PARAMETER CODE							(LSB)
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING		
3	PARAMETER LENGTH (84h)							
4	PHYSICAL INFORMATION FORMAT							
5	(MSB)							
...	Reserved							
7	(LSB)							
8	(MSB)							
...	DT device primary port physical interface information data							
135	(LSB)							

The PARAMETER CODE field shall be set to the value of the primary port index for the port (see 4.8.1) plus 0300h.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field contains the length in bytes of DT device primary port physical interface information data that follows.

The PHYSICAL INFORMATION FORMAT field specified the format of the DT device primary port physical interface information data.

Table 47 — PHYSICAL INFORMATION FORMAT Codes

Code	Description	Reference
00h	No information is available. The DT device primary port physical interface information data shall be set to zero.	
01h	The DT device primary port physical interface information data shall be set to bytes 0 through 127 of the SFF-8472 physical interface memory map address A0h.	SFF-8472

6.2.2.11 DT device primary port IP addresses log parameter(s)

6.2.2.11.1 DT device primary port IP addresses log parameter(s) overview

The DT device primary port IP addresses log parameter(s) format is shown in table 48.

Table 48 — DT device primary port IP addresses log parameter(s) format

Bit Byte	7	6	5	4	3	2	1	0	
0	(MSB) _____							PIC	
1	PARAMETER CODE								
2	Parameter list control byte - binary format list log parameter								
	DU	Obsolete	TSD	Obsolete		FORMAT AND LINKING			
3	PARAMETER LENGTH (2Ch)								
4	PRIMARY PORT INDEX								
5	DEFAULT ROUTING		Reserved				ADDRESS TYPE		
6	VLAN TAGS	Reserved			(MSB) _____				
7	VLAN ID							(LSB)	
8	(MSB) _____								
...	IP ADDRESS								
43	(LSB)								
44	Reserved								
45	PROTOCOL NUMBER								
46	(MSB) _____								
47	PROTOCOL SPECIFIC DATA							(LSB)	

The PARAMETER CODE field is set to a value between 1000h and 1FFFh. To read the complete list of IP addresses an application client attempts to read all parameter codes in this range. IP addresses may change without notification.

DT device primary port IP addresses log parameters:

- a) with the ADDRESS TYPE field set to 00b (i.e., Unused):
 - A) may appear anywhere in the list;

- B) may be returned; and
 - C) are not required to be returned,
- and

- b) with the ADDRESS TYPE field not set to 00b (i.e., an address type that is not the Unused address type) shall be returned in ascending order by:
 - 1) primary port index value;
 - 2) address type value; and
 - 3) protocol number value.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving enabled.

The PARAMETER LENGTH field contains the length in bytes of the DT device primary port’s IP address data that follows and shall be set as shown in table 48.

The PRIMARY PORT INDEX field indicates the value of the primary port index for the port (see 4.8.1) associated with this IP address. The same primary port index may be associated with multiple IP addresses.

The DEFAULT ROUTING field is specified in table 49. If the ADDRESS TYPE field set to 00b (i.e., Unused), this field is reserved.

Table 49 — DEFAULT ROUTING field

Code	Description
00b	Default routing support unknown. The GATEWAY field is reserved.
01b	Default routing supported. The GATEWAY field contains default routing information.
10b	Default routing is not supported, communication is only possible within the subnet. The GATEWAY field is reserved.
11b	Reserved

The ADDRESS TYPE field is specified in table 50.

Table 50 — ADDRESS TYPE field

Code	IP ADDRESS field	Reference
00b	Unused	
01b	IPv4 address	6.1.2
10b	IPv6 address	6.1.3
11b	Reserved	

A virtual LAN tags (VLAN TAGS) bit set to one indicates that this DT device port uses VLAN tags (i.e., the Ethernet port is a trunked port, see IEEE 802.1Q) on all frames sent and received using the VLAN specified in the VLAN ID field. A VLAN TAGS bit set to zero indicates that this DT device port does not use VLAN tags (i.e., the Ethernet port is an access port). If the ADDRESS TYPE field is set to 00b (i.e., Unused), this field is reserved.

If the VLAN TAGS bit is set to one, then the virtual LAN identifier (VLAN ID) field contains a value specifying to which VLAN this DT device port belongs. If the VLAN TAGS bit is set to zero, then the VLAN ID field shall be ignored. If the ADDRESS TYPE field set to 00b (i.e., Unused), this field is reserved.

The IP ADDRESS field definition depends on the ADDRESS TYPE field and is shown in table 50. If the ADDRESS TYPE field set to 00b (i.e., Unused), this field is reserved.

The PROTOCOL NUMBER field indicates the network transport protocol used by the Ethernet port and shall be set to 6 (i.e., TCP) or 17 (i.e., UDP).

The format of the PROTOCOL SPECIFIC DATA field is determined by the value of the PROTOCOL NUMBER field as specified in table 51. If the ADDRESS TYPE field set to 00b (i.e., Unused), this field is reserved.

Table 51 — IP address protocol specific data

PROTOCOL NUMBER ^a	Format of the PROTOCOL SPECIFIC DATA field	Reference
6	TCP port	6.1.4
17	UDP port	6.1.5
all others	Reserved	

^a IANA maintains a list of protocol number assignments at <http://www.iana.org/assignments/protocol-numbers/protocol-numbers.xhtml>

6.2.3 TapeAlert Response log page

Table 52 describes the TapeAlert Response log page. The fields in the parameter data represent the various TapeAlert state flags (see 4.6). See SSC-5 for the description of the corresponding TapeAlert state flags and the conditions that set each state flag to zero.

Table 52 — TapeAlert Response log page

Bit Byte	7	6	5	4	3	2	1	0
0	DS	SPF (0)	PAGE CODE (12h)					
1	SUBPAGE CODE (00h)							
2	(MSB)	PAGE LENGTH (000Ch)						(LSB)
3								
4	(MSB)	PARAMETER CODE (0000h)						(LSB)
5								
6	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
7	PARAMETER LENGTH (08h)							
8	FLAG01h	FLAG02h	FLAG03h	FLAG04h	FLAG05h	FLAG06h	FLAG07h	FLAG08h
9	FLAG09h	FLAG0Ah	FLAG0Bh	FLAG0Ch	FLAG0Dh	FLAG0Eh	FLAG0Fh	FLAG10h
10	FLAG11h	FLAG12h	FLAG13h	FLAG14h	FLAG15h	FLAG16h	FLAG17h	FLAG18h
11	FLAG19h	FLAG1Ah	FLAG1Bh	FLAG1Ch	FLAG1Dh	FLAG1Eh	FLAG1Fh	FLAG20h
12	FLAG21h	FLAG22h	FLAG23h	FLAG24h	FLAG25h	FLAG26h	FLAG27h	FLAG28h
13	FLAG29h	FLAG2Ah	FLAG2Bh	FLAG2Ch	FLAG2Dh	FLAG2Eh	FLAG2Fh	FLAG30h
14	FLAG31h	FLAG32h	FLAG33h	FLAG34h	FLAG35h	FLAG36h	FLAG37h	FLAG38h
15	FLAG39h	FLAG3Ah	FLAG3Bh	FLAG3Ch	FLAG3Dh	FLAG3Eh	FLAG3Fh	FLAG40h

See SPC-5 for the description of the DS bit, SPF bit, PAGE CODE field, and SUBPAGE CODE field.

The PAGE LENGTH field shall be set to 000Ch.

The PARAMETER CODE field shall be set to 0000h.

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving disabled.

The PARAMETER LENGTH field shall be set to 08h to allow transfer of the complete parameter.

A FLAGxx bit set to one indicates the TapeAlert state flag is set. A FLAGxx bit set to zero indicates the TapeAlert state flag is not set.

6.2.4 Requested Recovery log page

6.2.4.1 Requested Recovery log page overview

Table 53 describes the Requested Recovery log page. When the DT device is unable to complete an action (e.g., a volume load or unload) the DT device may set the RRQST bit to one in the very high frequency data log parameter (see 6.2.2.2) to request that the automation device perform a recovery action. An application client is able to obtain a list of alternative requested recovery actions by reading the Requested Recovery log page.

Table 53 — Requested Recovery log page

Bit Byte	7	6	5	4	3	2	1	0
0	DS	SPF (0)	PAGE CODE (13h)					
1	SUBPAGE CODE (00h)							
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
4	Requested recovery log parameters							
n								

See SPC-5 for the description of the DS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field.

Table 54 defines the Requested Recovery log page parameter codes.

Table 54 — Requested Recovery log page parameter codes

Parameter code	Description	Reference
0000h	Recovery procedures	6.2.4.2
0001h to 7FFFh	Reserved	
8000h to FFFFh	Vendor-specific	

6.2.4.2 Recovery procedures log parameter

The recovery procedures log parameter format is shown in table 55.

Table 55 — Requested recovery log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	PARAMETER CODE (0000h)							(LSB)
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
3	PARAMETER LENGTH (n-3)							
	Recovery procedures list							
4	First recovery procedure							
	.							
	.							
	.							
n	Last recovery procedure							

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving disabled.

The PARAMETER LENGTH field indicates the number of recovery procedure bytes that follow.

The PARAMETER CODE field shall be set to 0000h to indicate the recovery procedures log parameter.

The recovery procedures list contains recovery procedures (see table 56) listed in order from the most preferred to the least preferred procedure. When multiple recovery procedures are available, the most preferred procedure shall be the first in the list (i.e., in byte 4), and the other procedures listed in decreasing order of preference. The automation device may select any recovery procedure, regardless of position in the list.

Each recovery procedure consists of one or more actions to be performed. When the INXTN bit in the VHF data descriptor (see 6.2.2.2) is set to one, the parameter shall report only code 00h (i.e., Recovery not requested). If a failure occurs in performing one of the actions in a procedure, then an appropriate list of requested recovery procedures may be reported.

Recovery procedures do not persist across a power cycle.

Table 56 — Recovery procedures

Recovery Procedure	Description
00h	Recovery not requested.
01h	Recovery requested, no recovery procedure defined.
02h	Push volume.
03h	Remove and re-insert volume.
04h	Issue a command to unload the volume, then remove and re-insert the volume.
05h	Cycle power to DT device.
06h	Issue a command to load the volume.
07h	Issue a command to unload the volume.
08h	Issue LOGICAL UNIT RESET task management function.
09h	No recovery procedure defined. Contact service organization.
0Ah	Issue a command to unload the volume, then remove and quarantine the volume.
0Bh	Do not insert medium. Contact service organization.
0Ch	Issue a command to unload the volume, then remove volume and contact service organization.
0Dh	Request creation of a DT device error log.
0Eh	Retrieve a DT device error log.
0Fh	Modify configuration to allow microcode update (see 6.3.2.6.2) and re-insert volume.
10h	DT device initiated reboot. Retrieve a DT device error log.
11h to 7Fh	Reserved.
80h to FFh	Vendor-specific procedures.

If the Requested Recovery log page is requested when the RRQST bit in the VHF data descriptor (see 6.2.2.2) is set to zero, then a recovery procedure of 00h (i.e., Recovery not requested) shall be reported.

If the requested recovery procedure causes the DT device to eject the volume, then the automation device shall ensure there is no conflict between the motion of a medium transport element and the volume before initiating that recovery action.

If the requested recovery procedure is 09h (i.e., Contact service organization), then the automation device shall not issue a load or unload command or attempt to manipulate the medium physically.

If the requested recovery procedure is 0Ah (i.e., Issue a command to unload the volume, then remove and quarantine medium), then the volume should not be loaded in a DT device.

If the requested recovery procedure is 0Bh (i.e., Do not insert volume), then a non-recoverable error has occurred and insertion of a volume may cause damage. If the 0Bh recovery procedure is requested, then the RAA bit in the VHF data descriptor shall be set to zero, and no other recovery procedures shall be reported.

If the requested recovery procedure is 0Ch (i.e., issue a command to unload the volume, then remove volume and contact service organization), then a non-recoverable error has occurred and insertion of a new volume may cause damage. When recovery procedure 0Ch is requested and the volume has been removed, then the RAA bit in the VHF data descriptor (see 6.2.2.2) shall be set to zero, and no other recovery procedures shall be reported.

6.2.5 Service Buffers Information log page

The Service Buffers Information log page (see table 57) describes vendor-specific service buffers that are available from the ADC device server and which may be retrieved via a READ BUFFER command (see SPC-5). Using the assigned buffer ID, an application client is able to use descriptor mode (see SPC-5) to retrieve the size of the service buffer. An application client is able to use data mode (see SPC-5) to retrieve the service buffer according to the allowable service buffer retrieval conditions provided by the log parameter.

An ADC device server that implements the Service Buffers Information log page shall implement one or more log parameters. Each implemented log parameter shall represent a unique service buffer. Parameters shall not be changed via a LOG SELECT command.

An ADC device server shall save a copy of a service buffer (e.g., a snapshot) in response to:

- a) vendor-specific events; or
- b) processing a READ BUFFER command using descriptor mode with the BUFFER ID field set to a value that matches the BUFFER ID field value of one of the service buffers described by a parameter of the Service Buffers Information log page for which an unread copy of the service buffer does not exist.

An ADC device server that implements the Service Buffers Information log page should indicate 0Eh (i.e., Retrieve a DT device error log (see table 56)) in the recovery procedures when a copy of any service buffer exists. The copy of a service buffer should be maintained until the service buffer associated with the buffer ID in the READ BUFFER command is completely read. The copy of the service buffer may be cleared on a:

- a) vendor-specific event;
- b) LOGICAL UNIT RESET;
- c) TARGET RESET; or
- d) POWER ON RESET.

Table 57 — Service Buffers Information log page

Bit Byte	7	6	5	4	3	2	1	0
0	DS	SPF (0)	PAGE CODE (15h)					
1	SUBPAGE CODE (00h)							
2	(MSB)	PAGE LENGTH (n-3)						
3								(LSB)
4	Service buffers information log parameters							
n								

See SPC-5 for the description of the DS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field.

The service buffer information log parameter format is shown in table 58.

Table 58 — Service buffer information log parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) _____							
1	PARAMETER CODE _____ (LSB)							
2	Parameter list control byte - binary format list log parameter							
	DU	Obsolete	TSD	Obsolete			FORMAT AND LINKING	
3	PARAMETER LENGTH (n-3)							
4	BUFFER ID							
5	Reserved			TU	NMP	NMM	OFFLINE	PD
6	Reserved				CODE SET			
7	Reserved							
8	_____							
n	SERVICE BUFFER TITLE _____							

The PARAMETER CODE field is defined in table 59.

Table 59 — Service buffer information parameter codes

Code	Description
0000h to 00FFh	Service buffer identifier
0100h to 7FFFh	Reserved
8000h to FFFFh	Vendor-specific

The DU bit, TSD bit, and FORMAT AND LINKING field are described in SPC-5. These fields shall be set as described for a binary format list log parameter with implicit saving disabled.

The PARAMETER LENGTH field contains the length in bytes of service buffer information data that follows.

See SPC-5 for the description of the BUFFER ID field.

The TU bit, NMP bit, NMM bit, OFFLINE bit, and PD bit are collectively referred to as the service buffer retrieval control byte, and are described in this subclause.

A temporarily unavailable (TU) bit set to one indicates that the service buffer identified by the contents of the BUFFER ID field is temporarily unavailable for retrieval from the device server for reasons outside the scope of this standard. A TU bit set to zero indicates that the service buffer identified by the contents of the BUFFER ID field is able to be retrieved from the device server.

A no medium present (NMP) bit set to one indicates that the device server is unable to retrieve the service buffer identified by the contents of the BUFFER ID field when a volume is present in the DT device (see 4.4). A NMP bit set to zero indicates that the device server is able to retrieve the service buffer identified by the contents of the BUFFER ID field when a volume is present in the DT device.

A no medium mounted (NMM) bit set to one indicates that the device server is unable to retrieve the service buffer identified by the contents of the BUFFER ID field when a volume is mounted in the DT device (see 4.4). A NMM bit set to zero indicates that the device server is able to retrieve the service buffer identified by the contents of the BUFFER ID field when a volume is mounted in the DT device.

An OFFLINE bit set to one indicates that the device server is unable to retrieve the service buffer identified by the contents of the BUFFER ID field when the RMC device server is online (see 6.3.2.6.2). An OFFLINE bit set to zero indicates that the device server is able to retrieve the service buffer identified by the contents of the BUFFER ID field when the RMC device server is online.

A port disabled (PD) bit set to one indicates that the device server is unable to retrieve the service buffer identified by the contents of the BUFFER ID field is when the DT device primary port(s) associated with the RMU logical unit are enabled (see 6.3.2.1.2). A PD bit set to zero indicates that the device server is able to retrieve the service buffer identified by the contents of the BUFFER ID field when the DT device primary port(s) associated with the RMU logical unit are enabled.

See SPC-5 for the description of the CODE SET field.

The SERVICE BUFFER TITLE field is a null-terminated ASCII data field (see SPC-5) which describes the service buffer identified by the contents of the BUFFER ID field.

6.3 Mode parameters

6.3.1 Mode parameters overview

This subclause defines the descriptors and pages for mode parameters used with ADC device servers.

See SPC-5 for the description of the mode parameter list, including the mode parameter header and mode block descriptor.

The MEDIUM TYPE field in the mode parameter header is reserved for ADC device servers.

The DEVICE-SPECIFIC PARAMETER field in the mode parameter header is reserved for ADC device servers.

The DENSITY CODE field in the mode parameter block descriptor is reserved for ADC device servers.

The ADC device server may require that the DT device primary port(s) be disabled before certain mode parameters are allowed to be changed (see 6.3.2.1).

The page code assignments for ADC device servers are shown in table 60.

Table 60 — Summary of mode page codes (part 1 of 2)

Mode page name	Page code	Subpage code	Reference
Control	0Ah	n/a	SPC-5
Control Extension	0Ah	01h	SPC-5
Disconnect-Reconnect	02h	n/a	SPC-5
DT Device Primary Port	0Eh	02h	6.3.2.1
Extended	15h	n/a	SPC-5
Extended Device-Type Specific	16h	n/a	SPC-5
Informational Exceptions Control	1Ch	00h	SSC-5

Table 60 — Summary of mode page codes (part 2 of 2)

IP address	0Eh	07h	6.3.2.2
iSCSI alias	0Eh	06h	6.3.2.3
iSCSI authentication configuration	0Eh	08h	6.3.2.4
iSCSI CHAP authentication configuration	0Eh	09h	6.3.2.5
Logical Unit ^a	0Eh	03h	6.3.2.6
Power Condition page	1Ah	n/a	SPC-5
Protocol Specific Logical Unit	18h	n/a	SPC-5
Protocol Specific Port	19h	n/a	SPC-5
Restricted (see applicable command standard)	01h	00 to FEh	
	03h to 08h	00 to FEh	
	0Ah	F0h to FEh	
	0Bh to 0Dh	00h to FEh	
	0Fh to 14h	00h to FEh	
	1Ah	F0h to FEh	
	1Bh to 1Fh	00h to FEh	
	20h to 3Eh	00h to FEh	
Restricted (see applicable protocol standard)	18h	01h to FEh	
	19h	01h to FEh	
Return all pages	3Fh	00h	SPC-5
Return all pages and subpages	3Fh	FFh	SPC-5
Return all subpages	01h to 3Eh	FFh	SPC-5
Target Device Serial Number ^a	0Eh	04h	6.3.2.7
Target Device ^a	0Eh	01h	6.3.2.8
All page code and subpage code combinations not shown in this table are reserved.			

6.3.2 ADC Device Server Configuration mode page

6.3.2.1 DT Device Primary Port subpage

6.3.2.1.1 DT Device Primary Port subpage overview

The DT Device Primary Port subpage contains descriptors that allow the DT device’s primary ports to be configured, independent of the port type receiving the command (e.g., a Fibre Channel DT device primary port may be configured via the DT device’s ADI port).

This subpage contains one or more descriptors. The descriptors may be included in any order. On a MODE SENSE command, all descriptors supported by the ADC device server shall be returned. On a MODE SELECT command (see SPC-5), all of the supported descriptors shall be included. Any descriptor included shall be included in its entirety.

The DT Device Primary Port subpage is variable length, and consists of a mode subpage header followed by one or more descriptors (see table 61).

Table 61 — DT Device Primary Port subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (02h)							
2	(MSB)	PAGE LENGTH (n-3)						
3								(LSB)
DT device primary port descriptor list								
4	DT device primary port descriptor [first] (see 6.3.2.1.2)							
⋮								
n	DT device primary port descriptor [last] (see 6.3.2.1.2)							

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 61.

6.3.2.1.2 DT device primary port descriptor format

The DT device primary port descriptor format is shown in table 62.

Table 62 — DT device primary port descriptor format

Bit Byte	7	6	5	4	3	2	1	0
0	PRIMARY PORT INDEX							
1	Reserved				PROTOCOL IDENTIFIER			
2	(MSB) _____							
3	ADDITIONAL DESCRIPTOR LENGTH (n-3)						_____ (LSB)	
4	_____							
n	DT device primary port descriptor parameters _____							

The PRIMARY PORT INDEX field contains the primary port index (see 4.8.1) assigned by the DT device.

The PROTOCOL IDENTIFIER field contains a protocol identifier (see SPC-5) that indicates the protocol supported by the DT device primary port. For the MODE SELECT command, if the protocol identifier specified by the PROTOCOL IDENTIFIER field does not match the protocol of the target port specified by the PRIMARY PORT INDEX field, then the device server shall terminate the command with CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The ADDITIONAL DESCRIPTOR LENGTH field specifies the number of descriptor bytes that follow.

The DT device primary port descriptors vary based on the value in the PROTOCOL IDENTIFIER field (see table 63).

Table 63 — Primary port descriptor by protocol identifier value

Code	Description	Reference
0h	Fibre Channel descriptor	6.3.2.1.3
1h	Parallel SCSI descriptor	6.3.2.1.4
2h to 4h	Reserved	
5h	Internet SCSI (iSCSI) descriptor	6.3.2.1.5
6h	Serial Attached SCSI descriptor	6.3.2.1.6
7h to Fh	Reserved	

6.3.2.1.3 Fibre Channel descriptor parameter format

Table 64 describes the format of the descriptor parameter for Fibre Channel port types.

Table 64 — Fibre Channel descriptor parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	N_PORT	TOPLOCK	RHA	LIV	MPN		Reserved	PE
1	ESV	Reserved		TOPORD	SPDLOCK	SPEED		
2	Reserved				EXTENDED SPEED			
3	Reserved	FC-AL LOOP ID						
4	PORT NAME							
...								
11								

A DT device receiving a MODE SELECT command (see SPC-5) for an enabled DT device primary port, where the command attempts to change the value of the MPN field, LIV bit, RHA bit, TOPLOCK bit, N_PORT bit, SPEED field, SPDLOCK bit, TOPORD bit, FC-AL LOOP ID field, or PORT NAME field shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST. If the DT device primary port is disabled, then the DT device may change the MPN field, LIV bit, RHA bit, TOPLOCK bit, N_PORT bit, SPEED field, SPDLOCK bit, FC-AL LOOP ID field, or PORT NAME field and enable the DT device primary port with the same MODE SELECT command.

The N_PORT bit, topology order (TOPORD) bit, and topology lock (TOPLOCK) bit define the method by which the DT device primary port connects to the service delivery subsystem.

Table 65 defines how the TOPLOCK bit, N_PORT bit, and TOPORD bit interact.

Table 65 — TOPLOCK bit, N_PORT bit, and TOPORD bit interaction

TOPLOCK	TOPORD	N_PORT	Description
0	0	x	Vendor-specific behavior for negotiating topology.
0	1	0	The port attempts to negotiate using the Loop Port State Machine (see FC-AL-2). If unsuccessful, then the port attempts to negotiate using the FC port state machine (see FC-FS-5).
0	1	1	The port attempts to negotiate using the FC port state machine (see FC-FS-5). If unsuccessful, then the port attempts to negotiate using the Loop Port State Machine (see FC-AL-2).
1	x	0	The port is configured to operate as an L_Port (see FC-AL-2).
1	x	1	The port is configured to operate as an N_Port (see FC-FS-5). The RHA bit, LIV bit, and FC-AL LOOP ID field shall be ignored in a MODE SELECT command.

The require hard address (RHA) bit and the loop ID valid (LIV) bit are described in table 66.

Table 66 — Effect of RHA and LIV bits

RHA	LIV	Description
0b	0b	The FC-AL LOOP ID field shall be ignored.
0b	1b	The DT device primary port attempting to operate in an arbitrated loop topology shall use the value in the FC-AL LOOP ID field to request the Hard AL_PA during the LIHA Loop Initialization Sequence (see FC-AL-2) provided it has not already obtained its address. The DT device primary port may obtain its address during any of the Loop Initialization Sequences.
1b	0b	This bit value combination is invalid. A MODE SELECT command (see SPC-5) shall be terminated with a CHECK CONDITION status. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID FIELD IN PARAMETER LIST.
1b	1b	The DT device primary port attempting to operate in an arbitrated loop topology shall use the value in the FC-AL LOOP ID field to obtain its address during the LIHA Loop Initialization Sequence. The DT device primary port shall not obtain an address during the LIFA or LIPA Loop Initialization Sequences if the value of the FC-AL LOOP ID field does not match the previously obtained address. The DT device primary port shall not attempt to obtain an address during the LISA Loop Initialization Sequence. If there is a conflict for the Hard Address (see FC-AL-2) during loop initialization, then the DT device primary port shall enter the nonparticipating state. If the DT device primary port detects loop initialization while in the nonparticipating state, then the DT device primary port shall again attempt to get the address specified by the value in the FC-AL LOOP ID field.

The modify port name (MPN) field and PORT NAME field are used to modify and report modifications to the DT device primary port’s name identifier (see FC-FS-5), as defined in table 67.

Table 67 — MPN field

Code	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MPN field shall be set to zero for a MODE SENSE command. The PORT NAME field shall contain the currently assigned value.	Do not modify the DT device primary port’s name identifier (see FC-FS-5). The PORT NAME field shall be ignored.
01b	Invalid	Reserved.
10b		Set the DT device primary port’s name identifier to the manufacturer’s default value. The value in the PORT NAME field shall be ignored.
11b		Set the DT device primary port’s name identifier to the value in the PORT NAME field.
^a See SPC-5.		

A port enable (PE) bit set to one specifies that the DT device primary port (see 4.8) is enabled. A PE bit set to zero specifies that the DT device primary port’s drivers are not enabled and the DT device primary port shall not respond to primitives (see FC-AL-2). See 4.8.2 for the behavior of a primary port when the PE bit is changed from one to zero.

An extended speed valid (ESV) bit set to one in a MODE SELECT command specifies that the value in the EXTENDED SPEED field is valid and the SPEED field shall be ignored. An ESV bit set to zero in a MODE SELECT command specifies that the value in the EXTENDED SPEED field is not valid. The extended speed valid (ESV) bit shall be set to zero for a MODE SENSE command.

A speed lock (SPDLOCK) bit set to one forces the DT device primary port to only operate in the speed selected by the SPEED field, the ESV bit, and the EXTENDED SPEED field. A SPDLOCK bit set to zero allows the DT device primary port to negotiate the speed (see FC-FS-5). When the SPDLOCK bit is set to zero on a MODE SELECT command, the SPEED field shall be ignored.

The SPEED field contains the bit rate in which the DT device primary port is configured to operate. Table 68 defines the values for the SPEED field.

Table 68 — Fibre Channel speed values

SPEED Code	Speed
000b	1 Gb/sec
001b	2 Gb/sec
010b	4 Gb/sec
011b	8 Gb/sec
100b	10 Gb/sec
101b to 110b	Reserved
111b	Not reported ^a
^a The current speed is not reported in the CURRENT SPEED field but may be reported in the EXTENDED CURRENT SPEED field.	

The EXTENDED SPEED field specifies the bit rate in which the DT device primary port is configured to operate. Table 69 defines the values for the EXTENDED SPEED field. If the bit rate in which the DT device primary port is configured to operate is not defined in table 69, then the EXTENDED SPEED field shall be set to 0000b (i.e., not reported).

Table 69 — Fibre Channel extended speed values

EXTENDED SPEED Code	Speed
0000b	Not reported
0001b	2 Gb/sec
0010b	4 Gb/sec
0011b	8 Gb/sec
0100b	10GFC ^a
0101b	16GFC ^a
0110b	32GFC ^a
0111b	64GFC ^a
1000b	128GFC ^a
1001b to 1111b	Reserved
^a see FC-FS-5	

The FC-AL LOOP ID field contains the loop identifier that shall be used to represent the hard assigned AL_PA (see FC-AL-2).

The PORT NAME field contains the DT device’s primary port name identifier (see FC-FS-5). When the MPN field is set to 11b (see table 67), the PORT NAME field contains an NAA identifier type name identifier (see SPC-5).

6.3.2.1.4 Parallel SCSI descriptor parameter format

Table 70 defines the format of the descriptor parameter for parallel SCSI port types.

Table 70 — Parallel SCSI descriptor parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	Reserved			BMQ		BUS MODE		PE
1	Reserved							
2	MINIMUM TRANSFER PERIOD FACTOR							
3	SCSI ADDRESS							

A DT device receiving a MODE SELECT command (see SPC-5) for an enabled DT device primary port, where the command attempts to change the value of the BUS MODE field, BMQ field, MINIMUM TRANSFER PERIOD FACTOR field, or SCSI ADDRESS field, shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST. If the DT device primary port is disabled, then the DT device may change the BUS MODE field, BMQ field, MINIMUM TRANSFER PERIOD FACTOR field, or SCSI ADDRESS field and enable the DT device primary port with the same MODE SELECT command.

The bus mode qualifier (BMQ) field (see table 71) qualifies the effect that the BUS MODE field has on the DT device primary port.

Table 71 — BMQ field

Code	Effect
00b	The DT device shall ignore the value of the BUS MODE field.
01b	The DT device operates the DT device primary port as specified by the BUS MODE field. The DT device primary port shall not drive the DIFFSENS line with the associated voltage and current characteristics (see SPI-5).
10b	Reserved
11b	The DT device operates the DT device primary port in the mode specified by the BUS MODE field. The DT device primary port shall drive the DIFFSENS line with the associated voltage and current characteristics (see SPI-5).

The BUS MODE field defines the transmission mode that the DT device shall use in the TRANSCEIVER MODE field of the Negotiated Settings mode subpage (see SPI-5) for this DT device primary port.

A port enable (PE) bit set to one enables the DT device primary port to respond to selections on the SCSI bus (see SPI-5). A PE bit set to zero prevents the DT device primary port from responding to or attempting selections, reselections, or hard resets on the SCSI bus (see 4.8). See 4.8.2 for the behavior of a primary port when the PE bit is changed from one to zero.

The MINIMUM TRANSFER PERIOD FACTOR field defines the minimum transfer period factor that the DT device shall use when negotiating transfer agreements (see SPI-5) for this DT device primary port. DT devices that are not able to support the identified minimum transfer period factor may enter negotiation using the next larger supported transfer period factor.

The SCSI ADDRESS field specifies the address that the DT device primary port shall respond to on the SCSI bus.

6.3.2.1.5 iSCSI Ethernet port descriptor parameter format

An iSCSI Ethernet port is an Ethernet port that is used for iSCSI. Table 72 describes the format of the descriptor parameter for an iSCSI Ethernet port.

Table 72 — iSCSI Ethernet port descriptor parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	DCBX CONTROL		LLDP CONTROL		MPI		Reserved	PE
1	DSCP CONTROL		DSCP VALUE					
2	PFC PRIORITY CONTROL		PFC PRIORITY			Reserved		
3	Reserved							
...								
7								
8	(MSB)							
...	MAC ADDRESS							
13								

The DCBX CONTROL field (see table 73) specifies the DT device primary port behavior related to DCBX negotiation.

Table 73 — DCBX CONTROL field

Code	MODE SENSE command	MODE SELECT command
00b	DT device primary port does not support this field	Do not change
01b	Invalid	Use DT device primary port default
10b	Disabled. The DT device primary port shall not support DCBX negotiation	
11b	Enabled. The DT device primary port shall support DCBX negotiation	

The LLDP CONTROL (see table 74) specifies the DT device primary port behavior related to LLDP (Link Layer Discovery Protocol, see IEEE 802.1AB).

Table 74 — LLDP CONTROL field

Code	MODE SENSE command	MODE SELECT command
00b	DT device primary port does not support this field	Do not change
01b	Invalid	Use DT device primary port default
10b	Disabled. The DT device primary port should not use LLDP ^a	
11b	Enabled. The DT device primary port shall use LLDP	
^a The DT device primary port may use LLDP due to configuration options other than this configuration option		

A DT device receiving a MODE SELECT command (see SPC-5) for an enabled DT device primary port, where the command attempts to change the value of the MPI field or MAC ADDRESS field, shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST. If the DT device primary port is disabled, then the DT device may change the MPI field or MAC ADDRESS field and enable the DT device primary port with the same MODE SELECT command.

The modify port identifier (MPI) field and MAC ADDRESS field are used to modify and report the DT device primary port's Ethernet interface identifier (see RFC 7042), as defined in table 75.

Table 75 — MPI field

Code	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MPI field shall be set to zero for a MODE SENSE command. The MAC ADDRESS field shall contain the currently assigned value.	Do not modify the DT device primary port's Ethernet interface identifier. The MAC ADDRESS field shall be ignored.
01b	Invalid	Reserved
10b		Set the DT device primary port's Ethernet interface identifier to the manufacturer's default value. The value in the MAC ADDRESS field shall be ignored.
11b		Set the DT device primary port's Ethernet interface identifier to the value in the MAC ADDRESS field.
^a See SPC-5.		

A port enable (PE) bit set to one specifies that the DT device primary port (see 4.8) is enabled. A PE bit set to zero specifies that the DT device primary port shall not participate in primary port functions and should stop the port from communicating on the link. See 4.8.2 for the behavior of a primary port when the PE bit is changed from one to zero.

The DSCP CONTROL field (see table 76) specifies the DT device primary port behavior related to DSCP (differentiated services code point, see RFC 2474 and RFC 2475).

Table 76 — DSCP CONTROL field

Code	MODE SENSE command	MODE SELECT command
00b	DT device primary port does not support this field	Do not change
01b	Invalid	Reserved
10b	Disabled. The DSCP VALUE field is invalid	
11b	Enabled. The DSCP VALUE field is valid	

The DSCP VALUE field specifies the differentiated services code point value the DT device primary port shall set in the IP header if the DSCP CONTROL field is set to 11b (i.e., Enabled).

The PFC PRIORITY CONTROL field (see table 77) specifies the DT device primary port behavior related to priority-based flow control (PFC, see 802.1Qbb).

Table 77 — PFC PRIORITY CONTROL field

Code	MODE SENSE command	MODE SELECT command
00b	DT device primary port does not support this field	Do not change
01b	Invalid	Reserved
10b	Disabled. Priority-based flow control is disabled ^a .	
11b	Enabled. Priority-based flow control is enabled. Implementations may or may not use IEEE 802.1Q headers. If IEEE 802.1Q headers are enabled (i.e., due to VLAN TAGS set to 1b), then the IEEE 802.1Q header PCP field shall reflect the value in the PFC PRIORITY field.	
^a Priority-based flow control may be negotiated if the DCBX CONTROL field is set to 11b (i.e., Enabled)		

The PFC PRIORITY field specifies the PFC priority used for SCSI frames if the PFC PRIORITY CONTROL field is set to 11b (i.e., Enabled).

The media access control address (MAC ADDRESS) field contains the DT device’s primary port Ethernet interface identifier. When the MPI field is set to 11b (see table 75), the MAC ADDRESS field contains an Ethernet interface identifier in canonical form (see RFC 2469).

6.3.2.1.6 Serial Attached SCSI descriptor parameter format

Table 78 describes the format of the descriptor parameter for SAS port (see SPL-5) types.

Table 78 — Serial Attached SCSI descriptor parameter format

Bit Byte	7	6	5	4	3	2	1	0
0	Reserved			MPI		Reserved		PE
1	Reserved							
2	PROGRAMMED MINIMUM PHYSICAL LINK RATE				HARDWARE MINIMUM PHYSICAL LINK RATE			
3	PROGRAMMED MAXIMUM PHYSICAL LINK RATE				HARDWARE MAXIMUM PHYSICAL LINK RATE			
4	PORT IDENTIFIER							
...								
11								

A DT device receiving a MODE SELECT command (see SPC-5) for an enabled DT device primary port, where the command attempts to change the port identifier (see table 79), shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST. If the DT device primary port is disabled, then the automation application client may change the DT device port identifier and enable the DT device primary port with the same MODE SELECT command.

The modify port identifier (MPI) field and PORT IDENTIFIER field control the DT device primary SAS port identifier (see SPL-5) as defined in the table 79.

Table 79 — MPI field

Code	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MPI field shall be set to zero for a MODE SENSE command. The PORT IDENTIFIER field shall contain the currently assigned port identifier value.	Do not modify the DT device primary port identifier (see SPL-5). The PORT IDENTIFIER field shall be ignored.
01b	Invalid	Reserved
10b		Set the DT device primary port identifier to the manufacturer's default value. The value in the PORT IDENTIFIER field shall be ignored.
11b		Set the DT device primary port identifier to the value contained in the PORT IDENTIFIER field.
^a See SPC-5.		

A port enable (PE) bit set to one specifies that the DT device primary SAS port is enabled. A PE bit set to zero specifies that no SAS phy (see SAS-4.1) contained in the DT device primary SAS port is enabled. See 4.8.2 for the behavior of a primary port when the PE bit is changed from one to zero.

The PROGRAMMED MINIMUM PHYSICAL LINK RATE field indicates the minimum physical link rate that the port shall support. Table 80 defines the values for the PROGRAMMED MINIMUM PHYSICAL LINK RATE field.

In a MODE SELECT command, the value in the PROGRAMMED MINIMUM PHYSICAL LINK RATE field specifies the minimum value that each SAS phy that is participating in the port shall report in the HARDWARE MINIMUM PHYSICAL LINK RATE field of the Phy Control And Discover mode page (see SPL-5) of the DT device. If no SAS phy supports the specified link rate, then the MODE SELECT command shall be rejected with CHECK CONDITION status with the Sense Key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

In a MODE SENSE command, the value reported in the PROGRAMMED MINIMUM PHYSICAL LINK RATE field is:

- 1) the value set in the previous MODE SELECT; or
- 2) the value reported in the HARDWARE MINIMUM PHYSICAL LINK RATE field.

The HARDWARE MINIMUM PHYSICAL LINK RATE field indicates the minimum physical link rate that the port is capable of supporting. If the port contains multiple phys, then at least one SAS phy is capable of supporting the reported physical link rate. Table 81 defines the values for this field in a MODE SENSE command. The HARDWARE MINIMUM PHYSICAL LINK RATE field shall not be changeable in a MODE SELECT command.

The PROGRAMMED MAXIMUM PHYSICAL LINK RATE field indicates the maximum physical link rate that the port shall support. Table 80 defines the values for the PROGRAMMED MAXIMUM PHYSICAL LINK RATE field.

In a MODE SELECT command, the value in the PROGRAMMED MAXIMUM PHYSICAL LINK RATE field specifies the maximum value that each SAS phy that is participating in the port shall report in the HARDWARE MAXIMUM PHYSICAL LINK RATE field of the Phy Control And Discover mode page (see SPL-5) of the DT device. If no SAS phy supports the specified link rate, then the MODE SELECT command shall be rejected with CHECK CONDITION status with

the Sense Key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

In a MODE SENSE command, the value reported in the PROGRAMMED MAXIMUM PHYSICAL LINK RATE field is:

- 1) the value set in the previous MODE SELECT command; or
- 2) the value reported in the HARDWARE MAXIMUM PHYSICAL LINK RATE field.

Table 80 — PROGRAMMED MINIMUM PHYSICAL LINK RATE field and PROGRAMMED MAXIMUM PHYSICAL LINK RATE field

Code	Description
0h	Do not change current value.
1h to 7h	Reserved
8h	1.5 Gbit/s
9h	3 Gbit/s
Ah	6 Gbit/s
Bh	12 Gbit/s
Ch	22.5 Gbit/s
Dh to Fh	Reserved for future physical link rates

The HARDWARE MAXIMUM PHYSICAL LINK RATE field indicates the maximum physical link rate that the port is capable of supporting. If the port contains multiple phys, then at least one SAS phy is capable of supporting the reported physical link rate. Table 81 defines the values for this field in a MODE SENSE command. The HARDWARE MAXIMUM PHYSICAL LINK RATE field shall not be changeable in a MODE SELECT command.

Table 81 — HARDWARE MINIMUM PHYSICAL LINK RATE field and HARDWARE MAXIMUM PHYSICAL LINK RATE field

Code	Description
0h to 7h	Reserved
8h	1.5 Gbit/s
9h	3 Gbit/s
Ah	6 Gbit/s
Bh	12 Gbit/s
Ch	22.5 Gbit/s
Dh to Fh	Reserved for future physical link rates

If a SAS phy does not support any link rate within the bounds of the PROGRAMMED MINIMUM PHYSICAL LINK RATE field and the PROGRAMMED MAXIMUM PHYSICAL LINK RATE field, then the SAS phy shall not participate in the port.

The PORT IDENTIFIER field contains the DT device’s primary SAS port identifier. When the MPI field is set to 11b, the PORT IDENTIFIER field shall contain an NAA IEEE Registered format identifier (see SPL-5).

6.3.2.2 IP address subpage

The IP address subpage, see table 82, contains one or more IP addresses for the DT device.

Table 82 — IP address subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (07h)							
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
4								
...	Reserved							
7								
IP address port descriptor list								
8	IP address port descriptor [first] (see table 83)							
⋮								
n	IP address port descriptor [last] (see table 83)							

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 82.

The IP address port descriptor format is shown in table 83.

Table 83 — IP address port descriptor format

Bit Byte	7	6	5	4	3	2	1	0
0	PRIMARY PORT INDEX							
1	Reserved							
2	(MSB) _____							
3	IP ADDRESS PORT DESCRIPTOR LENGTH (n-3) _____ (LSB)							
4	APPLY	IPAPD_V	Reserved					
5	DEFAULT ROUTING		Reserved	AAM			ADDRESS TYPE	
6	VLAN TAGS	Reserved			(MSB) _____			
7	VLAN ID _____ (LSB)							
8	(MSB) _____							
...	IP ADDRESS _____							
43	(LSB)							
44	Reserved							
45	PROTOCOL NUMBER							
46	_____							
47	PROTOCOL SPECIFIC DATA _____							

The PRIMARY PORT INDEX field specifies the primary port index (see 4.8.1) of the DT device primary port associated with this IP address. The same primary port index may be associated with multiple IP addresses.

The IP ADDRESS PORT DESCRIPTOR LENGTH field contains the number of bytes to follow. The IP ADDRESS PORT DESCRIPTOR LENGTH field shall be set to a multiple of two.

An APPLY bit set to one specifies that the port address information contained in this IP address port descriptor for the specified primary port shall be set to the values in this page. An APPLY bit set to zero specifies that the port address information contained in this IP address port descriptor for the specified DT device primary port shall not be modified. In response to a MODE SENSE command, the APPLY bit shall be returned with a value of 0b.

An IP address port descriptor valid (IPAPD_V) bit set to one specifies that the port address information for the IP address port descriptor is valid. An IPAPD_V bit set to zero specifies that the port address information for the IP address port descriptor is not valid. On receipt of a MODE SELECT, with the IPAPD_V bit set to zero, the resources used to store the port address information for this IP address port descriptor shall be cleared.

For a MODE SELECT command, if the AAM field is set to 010b (i.e., Static), then the DEFAULT ROUTING field is specified in table 49. If the AAM field is not set to 010b, then the DEFAULT ROUTING field is reserved. If the DEFAULT ROUTING field is set to 00b in the parameter data of a MODE SELECT command, then the command shall be terminated with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETER DATA. For a MODE SENSE command, the DEFAULT ROUTING field shall be set to 01b (i.e., default routing is supported) or set to 10b (i.e., default routing is not supported).

The address assignment method (AAM) field specifies the type of address contained in the IP ADDRESS field. The definition of the AAM field is shown in table 84.

Table 84 — AAM field

Code	Description
000b	Entry not used
001b	DHCP
010b	Static
011b	IPv6 Link Local
100b	IPv6 Unique Local
101b	IPv6 Neighbor Discovery
all others	Reserved

The ADDRESS TYPE field is specified in table 50.

A virtual LAN tags (VLAN TAGS) bit set to one specifies that this DT device port shall use VLAN tags (i.e., the Ethernet port is a trunked port, see IEEE 802.1Q) on all frames sent and received using the VLAN specified in the VLAN ID field. A VLAN TAGS bit set to zero specifies that this DT device port shall not use VLAN tags (i.e., the Ethernet port is an access port).

If the VLAN TAGS bit is set to one, then the virtual LAN identifier (VLAN ID) field contains a value specifying to which VLAN this DT device primary port belongs. If the VLAN TAGS bit is set to zero, then the VLAN ID field shall be ignored.

If the AAM field is set to 010b (i.e., Static), then the IP ADDRESS field depends on the ADDRESS TYPE field and is set as shown in table 50. If the AAM field is not set to 010b, then the IP ADDRESS field is reserved.

The PROTOCOL NUMBER field indicates the network transport protocol used by the Ethernet port and shall be set to 6 (i.e., TCP) or 17 (i.e., UDP).

The format of the PROTOCOL SPECIFIC DATA field is determined by the value of the PROTOCOL NUMBER field as specified in table 51. If the ADDRESS TYPE field set to 00b (i.e., Unused), this field is reserved.

6.3.2.3 iSCSI alias subpage

The iSCSI alias subpage, see table 85, contains an iSCSI alias for the DT Device.

Table 85 — iSCSI alias subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (06h)							
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
4	(MSB)	ISCSI ALIAS						(LSB)
n								

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 85.

The ISCSI ALIAS field is a null-terminated, null-padded UTF-8 text string to use as the iSCSI alias (see RFC 3721) for the DT device.

6.3.2.4 iSCSI authentication configuration subpage

The iSCSI authentication configuration subpage (see table 86) configures the authentication method to be used during iSCSI communications.

Table 86 — iSCSI authentication subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (08h)							
2	(MSB)	PAGE LENGTH (0004h)						(LSB)
3								
4	Discovery AuthMethod Descriptor (see table 87)							
5	Normal AuthMethod Descriptor (see table 87)							
6								
7	Reserved							

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 86.

The Discovery AuthMethod descriptor is an Authmethod descriptor (see table 87) that contains the specification of authentication methods that may be used (see RFC 7143) for discovery sessions. This information is used for all initiators.

The Normal AuthMethod descriptor is an Authmethod descriptor (see table 87) that contains the specification of authentication methods that may be used (see RFC 7143) for normal sessions. This information is used for all initiators.

Table 87 — AuthMethod descriptor

Bit Byte	7	6	5	4	3	2	1	0
0	NONE	CHAP	Reserved					

A NONE bit set to one specifies that the device server supports an authentication method of None (see RFC 7143) during iSCSI communications. A NONE bit set to zero specifies that the device server does not support an authentication method of None during iSCSI communications.

A challenge handshake authentication protocol (CHAP) bit set to one specifies that the device server supports an authentication method of CHAP (see RFC 7143) during iSCSI communications. iSCSI CHAP authentication configuration is specified using the iSCSI CHAP authentication configuration subpage (see 6.3.2.5). A CHAP bit set to zero specifies that the device server does not support an authentication method of CHAP (see RFC 7143) during iSCSI communications.

6.3.2.5 iSCSI CHAP authentication configuration subpage

The iSCSI CHAP authentication configuration subpage (see table 88) is used to configure CHAP authentication for iSCSI communications and contains configuration information.

The iSCSI CHAP authentication configuration subpage consists of a mode subpage header followed by two descriptors (see table 88). Refer to RFC 7143 for an understanding of CHAP configuration requirements.

Table 88 — iSCSI CHAP authentication configuration subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (09h)							
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
4								
...	Reserved							
7								
8	Discovery descriptor							
	Normal descriptor							
n								

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 88.

The Discovery descriptor is used to configure the username—password pairs used during discovery sessions (see 6.3.2.5.1). This information is used for all initiators.

The Normal descriptor is used to configure the username—password pairs used during normal sessions (see 6.3.2.5.2). This information is used for all initiators.

6.3.2.5.1 Discovery descriptor format

The discovery descriptor format is shown in table 89.

Table 89 — Discovery descriptor format

Bit Byte	7	6	5	4	3	2	1	0
0	RTA	Reserved						
1	Reserved							
2	(MSB)	DISCOVERY DESCRIPTOR LENGTH (n-3)						(LSB)
3								
4	Username—password descriptor (initiator)							
n	Username—password descriptor (target)							

A require target authentication (RTA) bit set to one specifies that target authentication (see RFC 7143) shall be required as part of Login (RFC 7143). An RTA bit set to zero specifies that target authentication shall not be required, but is allowed, as part of Login.

The DISCOVERY DESCRIPTOR LENGTH field contains the number of bytes to follow and shall be set as shown in table 89.

The username—password descriptor (initiator) contains the username—password information that shall be used as the CHAP secret for authentication of an initiator. The format of a username—password descriptor is defined in 6.3.2.5.3.

The username—password descriptor (target) contains the username—password information that shall be used as the CHAP secret for authentication of the target. The format of a username—password descriptor is defined in 6.3.2.5.3.

6.3.2.5.2 Normal descriptor format

The normal descriptor format is shown in table 90.

Table 90 — Normal descriptor format

Bit Byte	7	6	5	4	3	2	1	0
0	RTA	Reserved						
1	Reserved							
2	(MSB)	NORMAL DESCRIPTOR LENGTH (n-3)						(LSB)
3								
4	Username—password descriptor (initiator)							
n	Username—password descriptor (target)							

A require target authentication (RTA) bit set to one specifies that target authentication (see RFC 7143) shall be required as part of Login (see RFC 7143). An RTA bit set to zero specifies that target authentication shall not be required, but is allowed, as part of Login.

The NORMAL DESCRIPTOR LENGTH field contains the number of bytes to follow and is set as shown in table 90.

The username—password descriptor (initiator) contains the username—password information that shall be used as the CHAP secret for authentication of an initiator. The format of a username—password descriptor is defined in 6.3.2.5.3.

The username—password descriptor (target) contains the username—password information that shall be used as the CHAP secret for authentication of the target. The format of a username—password descriptor is defined in 6.3.2.5.3.

6.3.2.5.3 Username—password descriptor format

The username—password descriptor format is shown in table 91.

Table 91 — Username—password descriptor format

Bit Byte	7	6	5	4	3	2	1	0
0	APPLY	Reserved						
1	Reserved							
2	(MSB)	USERNAME—PASSWORD DESCRIPTOR LENGTH (n-3)						
3								(LSB)
4	(MSB)	USERNAME LENGTH (m-5)						
5								(LSB)
6	(MSB)	USERNAME						
m								(LSB)
m+1	(MSB)	PASSWORD LENGTH (s-(m+2))						
m+2								(LSB)
m+3	(MSB)	PASSWORD						
s								(LSB)
s+1	PAD							

An APPLY bit set to one specifies that the username—password pair shall be set to the value in this descriptor. An APPLY bit set to zero specifies that the username—password pair contained in this descriptor shall not be modified. In response to a MODE SENSE command, the APPLY bit shall be returned with a value of 0b.

The USERNAME—PASSWORD DESCRIPTOR LENGTH field specifies how many bytes follow in this descriptor.

The USERNAME LENGTH field specifies the length in bytes of the USERNAME field.

The USERNAME field specifies the username. The USERNAME field shall use the Text Format character set specified in RFC 7143 and shall be null-terminated, null-padded.

The PASSWORD LENGTH field specifies the length in bytes of the PASSWORD field.

The PASSWORD field specifies the password. The PASSWORD field shall use the Text Format character set specified in RFC 7143 and shall be null-terminated, null-padded. RFC 7143 provides additional guidance on configuration of passwords. In response to a MODE SENSE command, the PASSWORD field shall be returned with a value of all nulls (i.e., the PASSWORD field is write-only and unable to be read). The setting of the password should be protected by using iADT-TLS or by protecting the communication inside a secure physical enclosure. iADT-TLS shall be supported if the implementation is not physically restricted to a secure physical enclosure.

The PAD field shall contain zero to three bytes set to zero such that the total length of the descriptor is a multiple of four. Device servers shall ignore the PAD field.

6.3.2.6 Logical Unit subpage

6.3.2.6.1 Logical Unit subpage overview

The Logical Unit subpage is variable-length, and consists of a mode subpage header followed by one or more descriptors. The descriptors may be included in any order. On a MODE SENSE command (see SPC-5), all logical units supported by the DT device (i.e., ADC logical units, RMC logical units, and SMC logical units) other than W-LUNs (see SPC-5) shall have descriptors returned. On a MODE SELECT command (see SPC-5), all of the supported descriptors shall be included. Any descriptor included shall be included in its entirety.

Table 92 describes the Logical Unit subpage.

Table 92 — Logical Unit subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (03h)							
2	(MSB)	PAGE LENGTH (n-3)						
3								(LSB)
Logical unit descriptor list								
4	Logical unit descriptor [first] (see 6.3.2.6.2, 6.3.2.6.3, or 6.3.2.6.4)							
	⋮							
n	Logical unit descriptor [last] (see 6.3.2.6.2, 6.3.2.6.3, or 6.3.2.6.4)							

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, SUBPAGE CODE field shall be set to the values shown in table 92.

The logical unit descriptors are described in this subclause.

6.3.2.6.2 RMC logical unit descriptor format

The descriptor format for an RMC logical unit (e.g., DEVICE TYPE field contains 01h in the case of a sequential-access device (see SPC-5)) is defined in table 93.

Table 93 — RMC logical unit descriptor format

Bit Byte	7	6	5	4	3	2	1	0	
0	LOGICAL UNIT INDEX								
1	DEVICE TYPE								
2	(MSB)		ADDITIONAL DESCRIPTOR LENGTH (n-3)					(LSB)	
3									
4	LOGICAL UNIT NUMBER								
5									
6	MLUD		Reserved			ACEPR	OFFLINE	ENABLE	
7	Reserved		AUH	SUHO	AMO	AUTOLOAD MODE			
8	MUE	MUP	Reserved	MANDROFF	CP	DRMODE	FCOMP	WP	
9	CURRENT DENSITY								
10									
...	Reserved								
15									
	Designation descriptor list								
16	Designation descriptor [first] (see SPC-5)								
	⋮								
	Designation descriptor [last] (see SPC-5)								
n									

The LOGICAL UNIT INDEX field contains a value assigned by the DT device at power on that uniquely identifies the RMC logical unit from all other logical units on the DT device, independent of device server. This field shall not be changeable. The ADC device server shall terminate a MODE SELECT command that attempts to change the value in the LOGICAL UNIT INDEX field with CHECK CONDITION status with the sense key to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The DEVICE TYPE field defines the type of command set supported by the RMC logical unit. The DEVICE TYPE field contains the same value that would be returned by the RMC logical unit in the PERIPHERAL DEVICE TYPE field for an INQUIRY command (see SPC-5).

The ADDITIONAL DESCRIPTOR LENGTH field specifies the number of descriptor bytes that follow.

The LOGICAL UNIT NUMBER field specifies the LUN (see SPC-5) for the RMC logical unit when accessed through the DT device primary port(s).

The LOGICAL UNIT NUMBER field contains the first two bytes (i.e., bytes 0 and 1) of a single level logical unit structure or the contents of a two byte extended logical unit address (see SAM-6). The LOGICAL UNIT NUMBER field shall be

ignored if the ENABLE bit is set to zero. The ADC device server shall return a CHECK CONDITION status to a MODE SELECT command (see SPC-5) when multiple descriptors with the ENABLE bit set to one have the same value in the LOGICAL UNIT NUMBER field. The sense key shall be set to ILLEGAL REQUEST and the additional sense code shall be set to INVALID FIELD IN PARAMETER LIST.

The modify logical unit descriptor (MLUD) field (see table 94) modifies and reports modifications to the RMC logical unit's device identifiers.

Table 94 — MLUD field

Code	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MLUD field shall be set to zero for a MODE SENSE command. The designation descriptors shall contain the currently assigned values.	Do not modify the RMC logical unit's device identifiers. The designation descriptors shall be ignored.
01b	Invalid	Reserved
10b		Set the RMC logical unit's device identifiers to the manufacturer's default values. The designation descriptors shall be ignored.
11b		Set the RMC logical unit's device identifiers to the values in the designation descriptors.
^a See SPC-5.		

The automation configure encryption policy required (ACEPR) bit set to one specifies that the encryption policy required attribute of the device entity (see SSC-5) shall be set to TRUE. The ACEPR bit set to zero specifies that the encryption policy required attribute of the device entity shall be set to FALSE. The ACEPR bit shall be a saveable mode parameter.

An automation device requests the RMC device server to enforce a security protocol configuration requirement (e.g., the capability of setting an encrypt only requirement) by setting the ACEPR bit to one in every RMC logical unit descriptor.

If the OFFLINE bit is set to one, then the RMC device server shall return CHECK CONDITION status with the sense key set to NOT READY and the additional sense code set to LOGICAL UNIT NOT READY, OFFLINE to all commands that require the RMC logical unit to be in the ready state. If the OFFLINE bit is set to zero, then the RMC device server shall respond normally to commands.

An ENABLE bit set to zero specifies that the RMC logical unit shall be treated as an incorrect logical unit (see SAM-6) for access through the DT device primary port(s). An ENABLE bit set to one specifies that the RMC logical unit shall not be treated as an incorrect logical unit and shall be enabled for access through the DT device primary port(s). The value of the ENABLE bit shall not affect access to the RMC logical unit through the ADI port.

If the ENABLE bit is changed from one to zero, then the RMC device server shall implicitly abort all commands in its task set received on a DT device primary port. All remaining device servers (e.g., local SMC device server, ADC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port as specified in SAM-6. The ENABLE bit changing from one to zero shall have no effect on I_T nexuses connected through an ADI port.

If the ENABLE bit is changed from zero to one, then all other device servers (e.g., local SMC device server, ADC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port as specified in SAM-6.

An automatic unload hold (AUH) bit set to one disables ejecting the volume when the volume is unloaded due to DT device specific conditions (e.g., cleaning complete, invalid medium type, microcode update complete, unsupported format, or other error conditions detected by the DT device). An AUH bit set to zero shall have no effect on the ejecting of the volume. The AUH bit does not affect the unload operation initiated via the physical user interface of the DT device.

A SCSI unload hold override (SUHO) bit set to one specifies the HOLD bit in the LOAD UNLOAD command (see SSC-5) shall be ignored by the RMC device server and the volume shall not be ejected. A SUHO bit set to zero specifies the HOLD bit in the LOAD UNLOAD command shall control if the volume is ejected or not, as processed by the RMC device server. The SUHO bit shall not affect LOAD UNLOAD commands processed by the ADC device server.

An autoload mode override (AMO) bit set to one specifies the load process shall be controlled by the AUTOLOAD MODE field (see table 95), overriding the settings in the Control mode page AUTOLOAD MODE field (see SPC-5). An AMO bit set to zero specifies that the settings in the Control mode page AUTOLOAD MODE field shall be used to control the load process.

The AUTOLOAD MODE field (see table 95) specifies the action to be taken by the DT device when a volume is inserted. If the AMO bit is set to zero, then the AUTOLOAD MODE field shall be ignored.

Table 95 — AUTOLOAD MODE field

Code	Definition
000b	Volume shall be loaded for full access.
001b	Volume shall be loaded for medium auxiliary memory access only.
010b	Volume shall not be loaded.
011b to 111b	Reserved

A microcode update enable (MUE) bit set to one specifies that the DT device shall prepare to accept a volume containing a microcode image. A description of this preparation is outside the scope of this standard. An MUE bit set to zero specifies that the DT device is not requested to prepare to accept a volume containing a microcode image. The MUE bit shall be set to zero by the DT device after the microcode update process completes or is aborted.

A microcode update protect (MUP) bit set to one shall prevent the DT device from performing a microcode update process upon the loading of a volume containing a microcode image. A MUP bit set to zero shall not prevent the DT device from performing a microcode update process upon the loading of a volume containing a microcode image.

A manual disaster recovery off (MANDROFF) bit set to one specifies that the DT device shall exit disaster recovery mode when an application client sets the DRMODE bit to zero. The definition of disaster recovery mode is outside the scope of this standard. A MANDROFF bit set to zero specifies that the DT device shall exit disaster recovery mode upon detection of a vendor-specific event.

A clean protect (CP) bit set to one shall prevent the DT device from performing a cleaning operation upon the loading of a cleaning volume. A CP bit set to zero shall not prevent the DT device from performing a cleaning operation upon the loading of a cleaning volume.

A disaster recovery mode (DRMODE) bit set to one specifies that the DT device shall operate in disaster recovery mode. A DRMODE bit set to zero specifies that the DT device shall not operate in disaster recovery mode. The definition of disaster recovery mode is outside the scope of this standard. The ADC device server shall set the DRMODE bit to zero when the MANDROFF bit is set to zero and the DT device exits disaster recovery mode.

A force compression (FCOMP) bit set to one specifies that the DT device shall enable compression using the currently selected default compression algorithm. A FCOMP bit set to zero does not specify that the DT device shall enable compression using the currently selected default compression algorithm.

A write protect (WP) bit set to one shall enable write protection (see the relevant RMC command standard). A WP bit set to zero shall disable write protection enabled via the WP bit. Detection of a change to unload status (g) or a change to unload status (h) (see table 5) shall:

- a) disabling write protection enabled via the WP bit; and
- b) setting the WP bit to zero.

The CURRENT DENSITY field shall be set to the density code associated with the density in which the DT device is currently operating. The CURRENT DENSITY field shall be ignored by the DT device on MODE SELECT commands.

The designation descriptors are the same as those in the Device Identification VPD page (see SPC-5). Only designation descriptors with the ASSOCIATION field set to 00b (i.e., logical unit) shall be used. On MODE SELECT commands, if any designation descriptor contains an ASSOCIATION field set to a value other than 00b, then the ADC device server shall return CHECK CONDITION status with the sense key to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

6.3.2.6.3 SMC logical unit descriptor format

The descriptor format for an SMC logical unit is defined in table 96.

Table 96 — SMC logical unit descriptor format

Bit Byte	7	6	5	4	3	2	1	0	
0	LOGICAL UNIT INDEX								
1	DEVICE TYPE (08h)								
2	(MSB)	ADDITIONAL DESCRIPTOR LENGTH (08h)							
3							(LSB)		
4	LOGICAL UNIT NUMBER								
5									
6	Reserved						CACHE	ENABLE	
7	Reserved								
8	(MSB)	REMOTE SMC DEVICE SERVER LOGICAL UNIT NUMBER							
9							(LSB)		
10									
11	Reserved								

The LOGICAL UNIT INDEX field contains a value assigned by the DT device at power on that uniquely identifies the SMC logical unit from all other logical units on the DT device, independent of device server. This field shall not be changeable. The ADC device server shall terminate a MODE SELECT command that attempts to change the value

in the LOGICAL UNIT INDEX field with CHECK CONDITION status with the sense key to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The DEVICE TYPE field shall contain the value shown in table 96 (i.e., 08h, a medium changer device; see SPC-5).

The ADDITIONAL DESCRIPTOR LENGTH field contains the number of descriptor bytes that follow and shall be set to the value shown in table 96.

The LOGICAL UNIT NUMBER field specifies, for the SMC logical unit when accessed through the DT device primary port(s):

- a) the LUN if access controls are not in effect; or
- b) the default LUN if access controls are in effect (see SPC-5).

The bridging manager shall use the value of the REMOTE SMC DEVICE SERVER LOGICAL UNIT NUMBER field when addressing the automation device logical unit containing the remote SMC device server (see 4.3).

The LOGICAL UNIT NUMBER field and the REMOTE SMC DEVICE SERVER LOGICAL UNIT NUMBER field each contain the first two bytes (i.e., bytes 0 and 1) of a single level logical unit structure or the contents of a two byte extended logical unit address (see SAM-6). The LOGICAL UNIT NUMBER field and the REMOTE SMC DEVICE SERVER LOGICAL UNIT NUMBER field shall be ignored if the ENABLE bit is set to zero. The ADC device server shall return a CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST to a MODE SELECT command (see SPC-5) if multiple descriptors with the ENABLE bit set to one have the same value in the LOGICAL UNIT NUMBER field.

A CACHE bit set to one and the ENABLE bit set to one specifies that the local SMC device server may cache SMC data and status (see 4.3.5). If the ADC device server receives a MODE SELECT command with parameter data of the ENABLE bit set to zero and the CACHE bit set to one, then the ADC device server shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and an additional sense code set to INVALID FIELD IN PARAMETER LIST. A CACHE bit set to zero or an ENABLE bit set to zero specifies that the local SMC device server shall not cache SMC data and status.

An ENABLE bit set to one specifies that the SMC logical unit shall be treated as a correct logical unit (see SAM-6) for access through the DT device primary port(s). Received commands may be processed by the local SMC device server or may be passed by the bridging manager to the remote SMC device server for processing (see 4.3). An ENABLE bit set to zero specifies that the SMC logical unit shall be treated as an incorrect logical unit (see SAM-6) for access through the DT device primary port(s). The ENABLE bit shall not change the SMC device server to an incorrect logical unit for access through the ADI port.

If the ENABLE bit is changed from one to zero, then the local SMC device server shall implicitly abort all commands in its task set. All remaining device servers (e.g., ADC device server, RMC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port as specified in SAM-6.

If the ENABLE bit is changed from zero to one, then all other device servers (e.g., ADC device server, RMC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port as specified in SAM-6.

6.3.2.6.4 ADC logical unit descriptor format

The descriptor format for an ADC logical unit is defined in table 97.

Table 97 — ADC logical unit descriptor format

Bit Byte	7	6	5	4	3	2	1	0	
0	LOGICAL UNIT INDEX								
1	DEVICE TYPE (12h)								
2	(MSB)	ADDITIONAL DESCRIPTOR LENGTH (04h)							
3								(LSB)	
4	LOGICAL UNIT NUMBER								
5									
6	Reserved							ENABLE	
7	Reserved								

The LOGICAL UNIT INDEX field contains a value assigned by the DT device at power on that uniquely identifies the ADC logical unit from all other logical units on the DT device, independent of device server. This field shall not be changeable. The ADC device server shall terminate a MODE SELECT command that attempts to change the value in the LOGICAL UNIT INDEX field with CHECK CONDITION status with the sense key to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The DEVICE TYPE field shall contain the value shown in table 97 (i.e., 12h, an Automation/Drive Interface device; see SPC-5).

The ADDITIONAL DESCRIPTOR LENGTH field contains the number of descriptor bytes that follow and shall be set to the value shown in table 97.

The LOGICAL UNIT NUMBER field specifies the LUN (see SPC-5) for the ADC logical unit when accessed through the DT device primary port(s).

The LOGICAL UNIT NUMBER field contains the first two bytes (i.e., bytes 0 and 1) of a single level logical unit structure or the contents of a two byte extended logical unit address (see SAM-6). The LOGICAL UNIT NUMBER field shall be ignored if the ENABLE bit is set to zero. The ADC device server shall return a CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST to a MODE SELECT command (see SPC-5) when multiple descriptors with the ENABLE bit set to one have the same value in the LOGICAL UNIT NUMBER field.

An ENABLE bit set to one specifies that the ADC logical unit shall be treated as a correct logical unit (see SAM-6) for access through the DT device primary port(s). An ENABLE bit set to zero specifies that the ADC logical unit shall be treated as an incorrect logical unit (see SAM-6) for access through that DT device primary port(s). The ENABLE bit shall not change the ADC device server to an incorrect logical unit for access through the ADI port.

If the ENABLE bit is changed from one to zero, then the ADC device server shall implicitly abort all commands in its task set received on a DT device primary port. All remaining device servers (e.g., local SMC device server, RMC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port. The ENABLE bit changing from one to zero shall have no effect on commands and task management requests received on an ADI port as specified in SAM-6.

If the ENABLE bit is changed from zero to one, then all other device servers (e.g., local SMC device server, RMC device server) in the DT device shall report a change in the logical unit inventory (see SPC-5) for each I_T nexus connected through a DT device primary port as specified in SAM-6.

6.3.2.7 Target Device Serial Number subpage

The Target Device Serial Number subpage is variable-length and contains the product serial number of the RMC device server and the ADC device server that shall be reported via the Unit Serial Number VPD page (see SPC-5). This product serial number shall not affect the product serial number of the local SMC device server. The subpage is defined in table 98.

Table 98 — Target Device Serial Number subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (04h)							
2	Reserved							
3	PAGE LENGTH (n-3)							
4	Reserved						MPSN	
5	Reserved							
...								
7								
8	PRODUCT SERIAL NUMBER							
n								

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 98.

The modify product serial number (MPSN) bit and PRODUCT SERIAL NUMBER field are used to modify and report modifications to the product serial number, as defined in table 99.

Table 99 — MPSN field

Code	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MPSN field shall be set to zero for a MODE SENSE command. The PRODUCT SERIAL NUMBER field shall contain the currently assigned value.	Do not modify the product serial number. The PRODUCT SERIAL NUMBER field shall be ignored.
01b	Invalid	Reserved
10b		Set the product serial number to the manufacturer-assigned value. The PRODUCT SERIAL NUMBER field shall be ignored.
11b		Set the product serial number to the value in the PRODUCT SERIAL NUMBER field.
^a See SPC-5.		

See SPC-5 for the description of the PRODUCT SERIAL NUMBER field. An application client may change the product serial number as a means to change the RMC logical unit's T10 vendor ID based designation descriptor (see SPC-5).

6.3.2.8 Target Device subpage

The Target Device subpage is variable length and contains SCSI target device name designation descriptors (see SPC-5) of the DT device. The subpage is defined in table 100.

Table 100 — Target Device subpage

Bit Byte	7	6	5	4	3	2	1	0
0	PS	SPF (1b)	PAGE CODE (0Eh)					
1	SUBPAGE CODE (01h)							
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
4	Reserved						MTDN	
5	Reserved							
6	Reserved							
7	Reserved							
	Designation descriptor list							
8	Designation descriptor [first] (see SPC-5)							
	⋮							
	Designation descriptor [last] (see SPC-5)							
n								

See SPC-5 for the description of the PS bit, SPF bit, PAGE CODE field, SUBPAGE CODE field, and PAGE LENGTH field. The SPF bit, PAGE CODE field, and SUBPAGE CODE field shall be set to the values shown in table 100.

The modify target device name (MTDN) field and designation descriptors are used to modify and report modifications to the DT device SCSI target device names (see SPC-5), as defined in table 101.

Table 101 — MTDN field

Value	MODE SENSE command ^a	MODE SELECT command ^a
00b	The MTDN field shall be set to zero for a MODE SENSE command. The designation descriptors shall contain the currently assigned values.	Do not modify the DT device's SCSI target device names. The designation descriptors shall be ignored.
01b	Invalid	Use the logical unit identifier for LUN 0 as the DT device SCSI target device name. The designation descriptors shall be ignored.
10b		Set the DT device's SCSI target device names to the manufacturer's default value. The designation descriptors shall be ignored.
11b		Set the DT device's SCSI target device names to the values in the designation descriptors.
^a See SPC-5.		

The designation descriptors are the same as those in the Device Identification VPD page (see SPC-5). Only designation descriptors with the ASSOCIATION field set to 10b (i.e., target device) shall be used. If a designation descriptor has the DESIGNATOR TYPE field set to 08h (i.e., SCSI name string, see SPC-5), then that iSCSI name shall be null-terminated, null-padded, lowercase ASCII (see RFC 3721 and RFC 7143) and shall be padded to 224 bytes. The iSCSI name may be reported with any number of pad bytes removed. On MODE SELECT commands, if any designation descriptor contains an ASSOCIATION field set to a value other than 10b, then the ADC device server shall return CHECK CONDITION status, setting the sense key to ILLEGAL REQUEST and the additional sense code to INVALID FIELD IN PARAMETER LIST.

A device server may reinitialize enabled DT device primary port(s) during the processing of a new designation descriptor.

A device server processing a MODE SELECT command with parameter data containing the Target Device subpage and the MTDN field set to 01b shall not modify the DT device's SCSI target device name and shall return CHECK CONDITION status with the sense key set to ILLEGAL REQUEST and the additional sense code set to INVALID FIELD IN PARAMETER LIST if:

- a) the DT device supports multiple primary ports;
- b) a transport protocol for a primary port in the DT device mandates uniqueness of the SCSI target device name and the name of a SCSI logical unit within the DT device; or
- c) a transport protocol for a primary port in the DT device mandates a name format for the SCSI target device name that differs from the name format of all of the logical unit identifiers of LUN 0.

6.4 Security protocol parameters

6.4.1 Security protocol parameters overview

This sub-clause describes the protocols, pages, and descriptors used by automation/drive interface devices with the SECURITY PROTOCOL IN and SECURITY PROTOCOL OUT commands (see SPC-5).

6.4.2 SECURITY PROTOCOL IN command specifying Tape Data Encryption security protocol

The SECURITY PROTOCOL IN command (see SPC-5) specifying Tape Data Encryption security protocol (i.e., 20h) requests the ADC device server to return information about the logical block security methods in the DT device and in the volume. The command supports a series of pages that are requested individually. An application client requests a page by using a SECURITY PROTOCOL IN command with the SECURITY PROTOCOL field set to Tape Data Encryption security protocol and the SECURITY PROTOCOL SPECIFIC field set to the page code requested.

A device server that supports the Tape Data Encryption protocol in the SECURITY PROTOCOL OUT command shall also support a SECURITY PROTOCOL IN command specifying the Tape Data Encryption protocol.

The SECURITY PROTOCOL SPECIFIC field (see table 102) specifies the page that the application client is requesting.

Table 102 — SECURITY PROTOCOL SPECIFIC field values for security protocol 20h

Code	Description	Support	Reference
0000h	Tape Data Encryption In Support page	M	SSC-5
0001h	Tape Data Encryption Out Support page	M	SSC-5
0002h to 000Fh	Reserved		
0010h	Data Encryption Capabilities page	M	SSC-5
0011h	Supported Key Formats page	O	SSC-5
0012h	Data Encryption Management Capabilities page	O	SSC-5
0013h to 001Fh	Reserved		
0020h	Data Encryption Status page	M	SSC-5
0021h	Next Block Encryption Status page	M	SSC-5
0022h to 002Fh	Reserved		
0030h	Random Number page	O	SSC-5
0031h	Device Server Key Wrapping Public Key page	O	SSC-5
0032h to FEFFh	Reserved		
FF00h to FFFFh	Vendor specific		

Support key:
M - mandatory for ADC device servers that support the Tape Data Encryption security protocol
O - optional for ADC device servers that support the Tape Data Encryption security protocol

If the SECURITY PROTOCOL SPECIFIC field is set to a reserved or unsupported value, then the ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN CDB.

6.4.3 SECURITY PROTOCOL IN command specifying Data Encryption Configuration security protocol

6.4.3.1 SECURITY PROTOCOL IN command specifying Data Encryption Configuration security protocol overview

The SECURITY PROTOCOL IN command (see SPC-5) specifying the Data Encryption Configuration security protocol (i.e., 21h) requests the ADC device server to return information about the data encryption configuration in the device server. The command supports a series of pages that are requested individually. An application client requests a page by using a SECURITY PROTOCOL IN command with the SECURITY PROTOCOL field set to Data Encryption Configuration security protocol and the SECURITY PROTOCOL SPECIFIC field set to the page code requested.

A device server that supports the Data Encryption Configuration security protocol in the SECURITY PROTOCOL OUT command shall also support a SECURITY PROTOCOL IN command specifying the Data Encryption Configuration security protocol.

The SECURITY PROTOCOL SPECIFIC field (see table 103) specifies the type of report that the application client is requesting.

Table 103 — SECURITY PROTOCOL SPECIFIC field values for security protocol 21h

Code	Description	Support	Reference
0000h	Data Encryption Configuration In Support page	M	6.4.3.2
0001h	Data Encryption Configuration Out Support page	M	6.4.3.3
0002h to 000Fh	Reserved		
0010h	Report Data Encryption Policy page	O	6.4.3.4
0011h to FEFFh	Reserved		
FF00h to FFFFh	Vendor specific		
Support key: M - mandatory for device servers that support the Data Encryption Configuration security protocol O - optional for device servers that support the Data Encryption Configuration security protocol			

If the SECURITY PROTOCOL SPECIFIC field is set to a reserved or unsupported value, then the ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN CDB.

6.4.3.2 Data Encryption Configuration In Support page

Table 104 specifies the format of the Data Encryption Configuration In Support page.

Table 104 — Data Encryption Configuration In Support page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)	PAGE CODE (0000h)						(LSB)
1								
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
Data Encryption Configuration In Support page code list								
4	(MSB)	Data Encryption Configuration In Support page code [first]						(LSB)
5								
		⋮						
n-1	(MSB)	Data Encryption Configuration In Support page code [last]						(LSB)
n								

The PAGE CODE field shall be set to 0000h to indicate the Data Encryption Configuration In support page.

See SPC-5 for the description of the PAGE LENGTH field.

The Data Encryption Configuration In Support page code list shall contain a list of pages in ascending order beginning with page code 0000h (see table 103) of all of the pages that the ADC device server supports for the SECURITY PROTOCOL IN command specifying the Data Encryption Configuration security protocol.

6.4.3.3 Data Encryption Configuration Out Support page

Table 105 specifies the format of the Data Encryption Configuration Out Support page.

Table 105 — Data Encryption Configuration Out Support page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)	PAGE CODE (0001h)						(LSB)
1								
2	(MSB)	PAGE LENGTH (n-3)						(LSB)
3								
Data Encryption Configuration Out Support page code list								
4	(MSB)	Data Encryption Configuration Out Support page code [first]						(LSB)
5								
		⋮						
n-1	(MSB)	Data Encryption Configuration Out Support page code [last]						(LSB)
n								

The PAGE CODE field shall be set to 0001h to indicate the data encryption configuration out support page.

See SPC-5 for the description of the PAGE LENGTH field.

The Data Encryption Configuration Out Support page code list shall contain a list of pages in ascending order (see table 110) of all of the pages that the ADC device server supports for the SECURITY PROTOCOL OUT command specifying the Data Encryption Configuration security protocol.

6.4.3.4 Report Data Encryption Policy page

The Report Data Encryption Policy page indicates the current encryption policy configuration for the DT device. Table 106 specifies the format of the Report Data Encryption Policy page.

Table 106 — Report Data Encryption Policy page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) PAGE CODE (0010h)							
1	(LSB)							
2	(MSB) PAGE LENGTH (08h)							
3	(LSB)							
4	ACWRE	ACVCELBRE	Reserved		CONTROL POLICY CODE			
5	Reserved							
6	Reserved							
7	Reserved		DECRYPTION PARAMETERS REQUEST POLICY			ENCRYPTION PARAMETERS REQUEST POLICY		
8	(MSB) ENCRYPTION PARAMETERS REQUEST PERIOD							
9	(LSB)							
10	Reserved							
11	Reserved							

The PAGE CODE field shall be set to 0010h to indicate the Report Data Encryption policy page.

See SPC-5 for the description of the PAGE LENGTH field.

The automation configured writes require encryption (ACWRE) bit set to one indicates that the encrypt only attribute of the device entity is set to TRUE (i.e, the DT device server requires that any logical blocks written to a volume are encrypted). The ACWRE bit set to zero indicates that the encrypt only attribute of the device entity is set to FALSE.

The automation configured volume containing encrypted logical blocks requires encryption (ACVCELBRE) bit set to one indicates that the encrypt appends to encrypted volume attribute of the device entity (see SSC-5) is set to TRUE (i.e., the DT device server requires that any logical blocks appended to a volume containing encrypted logical blocks are encrypted). The ACVCELBRE bit set to zero indicates that the encrypt appends to encrypted volume attribute of the device entity is set to FALSE.

The CONTROL POLICY CODE field (see table 6) contains information on the logical block encryption parameters control policy (see table 4.10.1).

See 6.4.5.3 for the definitions of the DECRYPTION PARAMETERS REQUEST POLICY, ENCRYPTION PARAMETERS REQUEST POLICY field and the ENCRYPTION PARAMETERS REQUEST PERIOD field.

6.4.4 SECURITY PROTOCOL OUT command specifying Tape Data Encryption security protocol

6.4.4.1 SECURITY PROTOCOL OUT command specifying Tape Data Encryption security protocol overview

The SECURITY PROTOCOL OUT command specifying the Tape Data Encryption security protocol (i.e., 20h) is used to configure the logical block security methods in the device server and in the volume. The command supports a series of pages that are sent individually. An application client requests to send a page by using a SECURITY PROTOCOL OUT command with the SECURITY PROTOCOL field set to Tape Data Encryption security protocol and the SECURITY PROTOCOL SPECIFIC field set to the page code requested.

The SECURITY PROTOCOL SPECIFIC field (see table 107) specifies the page that the application client is sending.

Table 107 — SECURITY PROTOCOL SPECIFIC field values for security protocol 20h

Code	Description	Support	Reference
0000h to 000Fh	Reserved		
0010h	Set Data Encryption page	O	SSC-5
0011h	SA Encapsulation page	O	SSC-5
0012h to 002Fh	Reserved		
0030h	Data Encryption Parameters Complete	M	6.4.4.2
0031h to FEFFh	Reserved		
FF00h to FFFFh	Vendor specific		
Support key: M - mandatory for device servers that support the Tape Data Encryption security protocol O - optional for device servers that support the Tape Data Encryption security protocol			

If the SECURITY PROTOCOL SPECIFIC field is set to a reserved or unsupported value, then the ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN CDB.

6.4.4.2 Data Encryption Parameters Complete page

Table 108 specifies the format of the Data Encryption Parameters Complete page.

Table 108 — Data Encryption Parameters Complete page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)	PAGE CODE (0030h)						(LSB)
1								
2	(MSB)	PAGE LENGTH (000Ch)						(LSB)
3								
4	AUTOMATION COMPLETE RESULTS							
5	Reserved							
6	Reserved			CABT	CKME	CEPR	CDPR	
7	Reserved							
8	(MSB)	PARAMETERS REQUEST SEQUENCE IDENTIFIER						(LSB)
...								
11								
12		Reserved						
...								
15								

The PAGE CODE field shall be set to 0030h to indicate the Data Encryption Parameters complete page.

See SPC-5 for the description of the PAGE LENGTH field.

The AUTOMATION COMPLETE RESULTS field indicates the results of the logical block encryption parameters request with the request identifier matching the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field. The

AUTOMATION COMPLETE RESULTS field shall be set to a value specified in table 109.

Table 109 — Automation complete results codes

Code	Description	Additional sense code
00h	No results (e.g., the automation application client has set the CABT bit to one).	n/a
01h	The automation application client has successfully completed servicing the request.	n/a
02h	The automation application client has experienced an unknown error servicing the request.	EXTERNAL DATA ENCRYPTION CONTROL ERROR
03h	The automation application client experienced an unrecoverable error in attempting to access the key manager.	EXTERNAL DATA ENCRYPTION KEY MANAGER ACCESS ERROR
04h	The key manager returned an error status when access to the key was attempted.	EXTERNAL DATA ENCRYPTION KEY MANAGER ERROR
05h	The requested key was not found.	EXTERNAL DATA ENCRYPTION KEY NOT FOUND
06h	A set of logical block encryption parameters was provided but the DT device was not able to process any logical objects using the set of logical block encryption parameters (see 4.10.4.5).	INCORRECT DATA ENCRYPTION KEY
07h	Request not authorized (e.g., the automation application client received an encryption parameters for encryption request and the volume mounted in the DT device does not support encryption but the policy is set to encrypt all logical blocks).	EXTERNAL DATA ENCRYPTION REQUEST NOT AUTHORIZED
08h to EFh	Reserved	Reserved
F0h to FFh	Vendor specific	Vendor specific

If the AUTOMATION COMPLETE RESULTS field is set to 00h, then:

- a) the clear abort (CABT) bit shall be set to one;
- b) the clear key management error (CKME) bit shall be set to one;
- c) the clear encryption parameters request (CEPR) bit shall be set to one; or
- d) the clear decryption parameters request (CDPR) bit shall be set to one.

The ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETERS LIST if the AUTOMATION COMPLETE RESULTS field is set to 00h, and:

- a) the CABT bit is set to zero;
- b) the CKME bit is set to zero;
- c) the CEPR bit is set to zero; and
- d) the CDPR bit is set to zero.

The ADC device server shall:

- a) set the external data encryption control additional sense code (e.g., see SSC-5) in the DT device to a value specified in table 109; or
- b) set the external data encryption control additional sense code in the DT device to EXTERNAL DATA ENCRYPTION CONTROL ERROR.

A clear abort (CABT) bit set to one indicates that the ABT bit in the DT device ADC data encryption control status log parameter shall be set to zero. A CABT bit set to zero does not indicate that the ABT bit in the DT device ADC data encryption control status log parameter shall be set to zero.

A clear key management error (CKME) bit set to one indicates that:

- a) the key timeout (KTO) bit in the key management error data log parameter shall be set to zero;
- b) the ERROR TYPE field in the key management error data log parameter shall be set to zero; and
- c) the logical block encryption parameters period expired indicator in the DT device shall be set to FALSE.

A CKME bit set to zero does not indicate that the KME bit in the DT device ADC data encryption control status log parameter shall be set to zero.

If the clear encryption parameters request (CEPR) bit is set to one and the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field matches the current logical block encryption parameters request sequence identifier, then the ADC device server shall set the encryption parameters request (EPR) bit in the DT device ADC data encryption control status log page to zero and shall set the encryption parameters for encryption request indicator in the DT device to FALSE. If the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field does not match the current logical block encryption parameters request sequence identifier, then the ADC device server shall ignore the CEPR bit. If the CEPR bit is set to zero, then the ADC device server is not being requested to clear the encryption parameters for encryption request for the indicated key request sequence.

If the clear decryption parameters request (CDPR) bit is set to one and the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field matches the current logical block encryption parameters request sequence identifier, then the ADC device server shall set the decryption parameters request (DPR) bit in the DT device ADC data encryption control status log page to zero and shall set the encryption parameters for decryption request indicator in the DT device to FALSE. If the value in the PARAMETERS REQUEST SEQUENCE IDENTIFIER field does not match the current logical block encryption parameters request sequence identifier, then the ADC device server shall ignore the CDPR bit. If the CDPR bit is set to zero, then the ADC device server is not being requested to clear the encryption parameters for decryption key request for the indicated key request sequence.

The PARAMETERS REQUEST SEQUENCE IDENTIFIER field shall contain the logical block encryption parameters request sequence identifier for the logical block encryption parameters request that corresponds to these results.

6.4.5 SECURITY PROTOCOL OUT command specifying Data Encryption Configuration security protocol

6.4.5.1 SECURITY PROTOCOL OUT command specifying Data Encryption Configuration security protocol overview

The SECURITY PROTOCOL OUT command (see SPC-5) specifying a value of 21h (i.e., the Data Encryption Configuration security protocol) is used to configure the data security methods in the DT device. The command supports a series of pages that are sent individually. An application client requests to send a page by using a SECURITY PROTOCOL OUT command with the SECURITY PROTOCOL field set to Data Encryption Configuration security protocol and the SECURITY PROTOCOL SPECIFIC field set to the page code requested.

The SECURITY PROTOCOL SPECIFIC field (see table 110) specifies the page that the application client is sending.

Table 110 — SECURITY PROTOCOL SPECIFIC field values for security protocol 21h

Code	Description	Support	Reference
0000h to 000Fh	Reserved		
0010h	Configure Data Encryption Algorithm Support page	O	6.4.5.2
0011h	Configure Encryption Policy page	M	6.4.5.3
0011 to FEFFh	Reserved		
FF00h to FFFFh	Vendor specific		
Support key: M - mandatory for device servers that support the Data Encryption Configuration security protocol O - optional for device servers that support the Data Encryption Configuration security protocol			

If the SECURITY PROTOCOL SPECIFIC field is set to a reserved or an unsupported value, then the ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN CDB.

6.4.5.2 Configure Data Encryption Algorithm Support page

Table 111 specifies the format of the Configure Data Encryption Algorithm Support page. If the DT device has:

- a) a saved set of logical block encryption parameters associated with an I_T nexus;
- b) a saved set of logical block encryption parameters associated with a DT device management interface; or
- c) has a volume mounted,

then the ADC device server shall terminate a SECURITY PROTOCOL OUT command specifying the Configure Data Encryption Algorithm Support page with CHECK CONDITION status and set the sense key to ILLEGAL

REQUEST, the additional sense code to INVALID FIELD IN PARAMETER LIST, and the sense key specific FIELD POINTER field set to the PAGE CODE field.

Table 111 — Configure Data Encryption Algorithm Support page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB)							
1	PAGE CODE (0010h)						(LSB)	
2	(MSB)							
3	PAGE LENGTH (n-3)						(LSB)	
4	Reserved							
...								
19								
Encryption Algorithm Support descriptor								
20	Encryption Algorithm Support descriptor [first] (see table 112)							
	⋮							
n	Encryption Algorithm Support descriptor [last] (see table 112)							

The PAGE CODE field shall be set to 0010h to indicate the Configure Data Encryption Algorithm Support page.

See SPC-5 for the description of the PAGE LENGTH field.

Each Encryption Algorithm Support descriptor (Table 112) shall contain configuration settings for a logical block encryption algorithm supported by the DT device. If more than one descriptor is included, then they shall be in ascending order of the value in the ALGORITHM INDEX field. It shall not be considered an error if Encryption Algorithm Support descriptors are not included for all algorithms supported by the DT device.

Table 112 — Encryption Algorithm Support descriptor

Bit Byte	7	6	5	4	3	2	1	0
0	ALGORITHM INDEX							
1	Reserved							
2	(MSB)							
3	DESCRIPTOR LENGTH (004h)						(LSB)	
4	DISABLE	Reserved						
5	Reserved							
...								
7								

The ALGORITHM INDEX field specifies which of the logical block encryption algorithms reported by the SECURITY PROTOCOL IN command specifying the Tape Data Encryption protocol and the Data Encryption Capabilities pages shall be configured. If the value specified in the ALGORITHM INDEX field is not an algorithm index for a

supported logical block encryption algorithm, then the ADC device server shall terminate the command with CHECK CONDITION STATUS with the sense key set to ILLEGAL COMMAND and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

The DESCRIPTORS LENGTH field indicates the length of the data to follow.

A DISABLE bit set to one specifies that the DT device shall disable the logical block encryption algorithm specified by the algorithm index in the ALGORITHM INDEX field (e.g., return an Encryption Algorithm descriptor for the specified algorithm in response to a SECURITY PROTOCOL IN command specifying the Tape Data Encryption security protocol and the Data Encryption Capabilities page with the DECRYPT_C field set to no capability and the ENCRYPT_C set to no capability, see SSC-5). A DISABLE bit set to zero specifies that the DT device shall not disable the specified encryption algorithm. If the DISABLE is set to zero, then the DT device shall enable the specified logical block encryption algorithm.

6.4.5.3 Configure Encryption Policy page

Table 113 specifies the format of the Configure Encryption Policy page. At the completion of successful processing of a SECURITY PROTOCOL OUT command containing a Configure Encryption Policy page, the device server shall set the encryption policy established attributed of the device entity (see SSC-5) to TRUE.

An automation application client may use the ACEPR bit set to one in the Logical Unit mode subpage RMC logical unit descriptor (see 6.3.2.6.2) and save the subpage to request the device server to enforce a security protocol configuration requirement (see SSC-5).

Table 113 — Configure Encryption Policy page

Bit Byte	7	6	5	4	3	2	1	0
0	(MSB) PAGE CODE (0011h) (LSB)							
1								
2	(MSB) PAGE LENGTH (08h) (LSB)							
3								
4	ACWRE	ACVCELBRE	Reserved		CONTROL POLICY CODE			
5	Reserved							
6								
7	Reserved		DECRYPTION PARAMETERS REQUEST POLICY			ENCRYPTION PARAMETERS REQUEST POLICY		
8	(MSB) ENCRYPTION PARAMETERS REQUEST PERIOD (LSB)							
9								
10	Reserved							
11								

The PAGE CODE field shall be set to 0011h to indicate the configure encryption policy page.

See SPC-5 for the description of the PAGE LENGTH field.

The CONTROL POLICY CODE field specifies the logical block encryption parameters control policy for the DT device (see 4.10.1). If the DT device has a saved set of logical block encryption parameters, then the ADC device server shall terminate the command with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETER LIST.

If the DT device has a volume mounted (i.e., is in load condition Volume mounted (see SSC-5)), then the application client should not modify the CONTROL POLICY CODE field if any DT device primary port has been enabled since power on.

The ADC device server shall terminate a command attempting to change the:

- a) CONTROL POLICY CODE field;
- b) DECRYPTION PARAMETERS REQUEST POLICY field;
- c) ENCRYPTION PARAMETERS REQUEST POLICY field; or
- d) ENCRYPTION PARAMETERS REQUEST PERIOD field

with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETER LIST if:

- a) any DT device primary port is enabled; and
- b) the DT device has a volume mounted.

After successful completion of a Configure Encryption Policy page with the CONTROL POLICY CODE field set to a policy code for the Open policy type or a policy code for the RMC exclusive policy type, the ADC device server shall:

- a) set the encryption parameters request indicator in the DT device to zero;
- b) set the decryption parameters request indicator in the DT device to zero;
- c) set the encryption parameters request (EPR) bit, decryption parameters request (DPR) bit, key management error (KME) bit, and the abort (ABT) bit in the DT device ADC data encryption control status log parameter to zero; and
- d) set the key timeout (KTO) bit to zero and the ERROR TYPE field to 00b in the key management error data log parameter.

The automation configured writes require encryption (ACWRE) bit set to one specifies that the encrypt only attribute of the device entity (see SSC-5) shall be set to TRUE. If the ADC device server supports the ACWRE bit set to one, then the device entity shall support detection of the encrypt only error (see SSC-5). The ACWRE bit set to zero specifies that the encrypt only attribute of the device entity shall be set to FALSE.

The ADC device server shall terminate a command attempting to change the ACWRE field from one to zero with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETER LIST if the DT device has a volume mounted.

The automation configured volume containing encrypted logical blocks requires encryption (ACVCELBRE) bit set to one specifies that the encrypt appends to encrypted volume attribute of the device entity (see SSC-5) shall be set to TRUE. If the ADC device server supports the ACVCELBRE bit set to one, then the device entity shall support detection of the encrypt appends to encrypted volume error (see SSC-5). The ACVCELBRE bit set to zero specifies that the encrypt appends to encrypted volume attribute of the device entity shall be set to FALSE.

The ADC device server shall terminate a command attempting to change the ACVCELBRE bit from a one to a zero with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST, and the additional sense code set to INVALID FIELD IN PARAMETER LIST if the DT device has a volume mounted.

The DECRYPTION PARAMETERS REQUEST POLICY field specifies the policy that the DT device shall use for requesting a set of logical block encryption parameters for decryption from the automation application client (see SSC-5). The decryption parameters request policy values are defined in Table 114.

Table 114 — DECRYPTION PARAMETERS REQUEST POLICY field values

Value	Policy Name (see SSC-5)	Reference
000b	No logical block decryption parameters request	SSC-5
001b	Request logical block decryption parameters as needed	SSC-5
010b to 111b	Reserved	

The ENCRYPTION PARAMETERS REQUEST POLICY field specifies the policy that the DT device shall use for requesting a set of logical block encryption parameters for encryption from the automation application client (see SSC-5). The encryption parameters request policy values are defined in table 115.

Table 115 — ENCRYPTION PARAMETERS REQUEST POLICY field values

Value	Policy Name (see SSC-5)	Reference
000b	No logical block encryption parameters request	SSC-5
001b	Request logical block encryption parameters every reposition	SSC-5
010b	Request logical block encryption parameters when not set	SSC-5
011b to 111b	Reserved	

The ENCRYPTION PARAMETERS REQUEST PERIOD field indicates the maximum time, in 100 millisecond increments, the DT device shall wait after requesting a set of logical block encryption parameters for encryption (see 6.2.2.4) or requesting a set of logical block encryption parameters for decryption from the automation application client (e.g., the logical block encryption parameters period time if the DT device includes an SSC-5 compliant device server, see SSC-5). An ENCRYPTION PARAMETERS REQUEST PERIOD field value of 0000h indicates the logical block encryption parameters request period shall be infinite.

If the CONTROL POLICY CODE field is set to a policy code for the Open policy type or is set to a policy code for the RMC exclusive policy type, then the DECRYPTION PARAMETERS REQUEST POLICY, ENCRYPTION PARAMETERS REQUEST POLICY, and ENCRYPTION PARAMETERS REQUEST PERIOD fields shall be ignored.

6.5 Vital product data parameters

6.5.1 Vital product data parameters overview and page codes

This subclause defines the vital product data parameters (VPD) pages used with ADC device types. See SPC-5 for VPD pages used with all device types. The VPD page codes specific to ADC devices are specified in table 116.

Table 116 — ADC device VPD page codes

Page code	Description	Support requirement	Reference
00h	Supported VPD Pages	Mandatory	SPC-5
01h to 7Fh	Reserved		
80h	Unit Serial Number	Mandatory	SPC-5
81h to 82h	Obsolete		
83h	Device Identification	Mandatory	SPC-5 ^a
84h	Software Interface Identification	Optional	SPC-5
85h	Management Network Addresses	Optional	SPC-5
86h	Extended INQUIRY Data	Optional	SPC-5
87h	Mode Page Policy	Optional	SPC-5
88h	SCSI Ports	Optional	SPC-5
89h to B0h	Reserved		
B1h	Manufacturer-assigned Serial Number VPD page	Optional	6.5.3
B2h to BFh	Reserved		
C0h to FFh	Vendor specific		

^a See 6.5.2.

6.5.2 Device Identification VPD page

The ADC device server shall either:

- a) not return the T10 vendor ID descriptor (see SPC-5) with an ASSOCIATION field set to 00b (i.e., logical unit); or
- b) ensure that the T10 vendor ID descriptor with an ASSOCIATION field set to 00b (i.e., logical unit) be unique (e.g., by including “ADC” within the VENDOR SPECIFIC IDENTIFIER field).

6.5.3 Manufacturer-assigned Serial Number VPD page

Table 117 defines the Manufacturer-assigned Serial Number VPD page.

Table 117 — Manufacturer-assigned Serial Number VPD page

Bit Byte	7	6	5	4	3	2	1	0
0	PERIPHERAL QUALIFIER			PERIPHERAL DEVICE TYPE				
1	PAGE CODE (B1h)							
2	(MSB)	PAGE LENGTH (n-3)						
3							(LSB)	
4	MANUFACTURER SERIAL NUMBER							
n								

See SPC-5 for the description of the PERIPHERAL QUALIFIER field, PERIPHERAL DEVICE TYPE field, PAGE CODE field, and PAGE LENGTH field. The PAGE CODE field shall be set to the value shown in table 117.

The MANUFACTURER-ASSIGNED SERIAL NUMBER field contains right-aligned ASCII data (see SPC-5) that is the manufacturer-assigned serial number. If the manufacturer-assigned serial number is not available, then the ADC device server shall return ASCII spaces (20h) in this field. If the manufacturer-assigned serial number differs from the value in the PRODUCT SERIAL NUMBER field (see SPC-5), then the manufacturer-assigned serial number shall not be used in building the T10 vendor ID descriptor (see SPC-5).